


O&F

欧达·法斯克

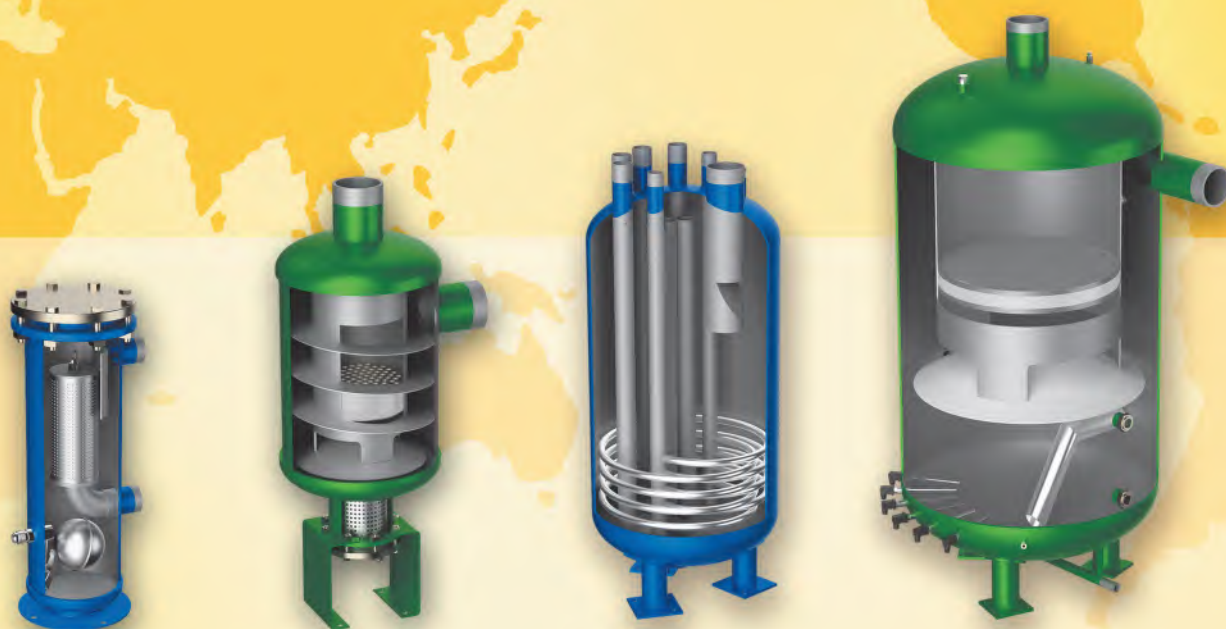

2026

始创于1994年 行业领军品牌 一站式配套服务

天津市欧达法斯克制冷设备有限公司

Tianjin OUDAFASIKE Refrigeration Equipment Co.,Ltd

河北欧达法斯克能源科技有限公司

Hebei OUDAFASIKE Energy Technology Co., Ltd.

天津市欧达法斯克制冷设备有限公司

河北欧达法斯克能源科技有限公司

Tianjin OUDAFASKE Refrigeration Equipment Co., Ltd.

Hebei OUDAFASKE Energy Technology Co., Ltd.

公司简介:

天津市欧达法斯克制冷设备有限公司始建于1994年，拥有现代化标准工业厂房10000平方米，自动化生产设备和一大批具有多年工作经验的产品设计及生产人员。公司取得了《TUV ISO9001-2015质量体系认证》、《安全阀生产许可证》。

河北欧达法斯克能源科技有限公司是天津市欧达法斯克制冷设备有限公司全资子公司，厂房面积15000平方米，公司取得了《压力容器设计和生产许可证》。


产品包括：油分离器、气液分离器、储液器、过滤器、安全阀、冷热交换器、油位控制系统、液位控制系统等。

Company Profile:

Established in 1994, Tianjin OUDAFASIKE Refrigeration Equipment Co., Ltd. A modern 10,000-square-meter industrial facility equipped with automated production systems and a team of experienced product designers and manufacturers. The company holds the TUV ISO9001-2015 Quality Management System Certification and a Safety Valve Production License.

Hebei OUDAFASKE Energy Technology Co., Ltd., a wholly-owned subsidiary of Tianjin OUDAFASKE Refrigeration Equipment Co., Ltd., with a 15,000-square-meter factory and holds the Pressure Vessel Design and Production License.

Products including: Oil separator, Accumulator, Liquid receiver, Filter, Safety valve, Heating & cooling exchanger, Oil level control system, Liquid level control system, etc.

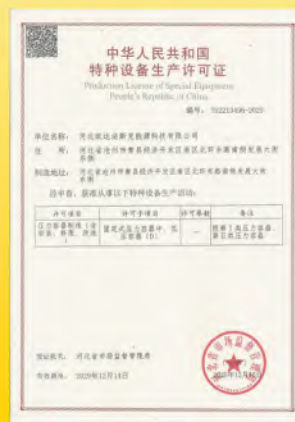

目录 | CATALOG

01. FDK系列干燥过滤器 FDK Series Filter Driers	01
02. FE系列可换滤芯过滤器 FE Series Replaceable Core Filter	02-03
03. FEM系列可换滤芯过滤器 FEM Series Replaceable Core Filter	04
04. FN系列可换滤芯过滤器 FN Series Replaceable Core Filter	05
05. 45FN系列可换滤芯液管过滤器 45FN Series Replaceable Filter Core Liquid Line Filter	06
06. 130FN系列可换滤芯液管过滤器 130FN Series Replaceable Filter Core Liquid Line Filter	07
07. FNM系列可换滤芯过滤器 FNM Series Replaceable Core Filter	08
08. FEP系列组合式可换滤芯过滤器 FEP Series Combined Type Relaceable Core Filter Drier	09
09. FJ-48/FJ-100系列干燥过滤芯 FJ-48/FJ-100 Series Desiccant	10
10. FRE系列吸气过滤芯 FRE Series Core for Suction Fiter	11
11. FGD系列消声器 FGD Series Discharge Line Muffler	12
12. VAS系列避震波纹金属软管 VAS Series Vibration Absorbers Corrugated Metal Tube	13
13. 重要说明 Important Explanation	14
14. 重要说明-警告: 冷凝温度变化会影响油分离器制冷能力	15
15. F-52DT&F-62DT系列油分离器 F-52DT&F-62DT Series Oil Separator	16
16. F-52DT&F-62DT系列油分离器制冷能力表	17
17. 45F-62系列油分离器 45F-62 Series Oil Separator	18
18. 45F-62系列油分离器制冷能力表	19
19. F-56系列油分离器 F-56 Series Oil Separator	20
20. F-56系列油分离器制冷能力表	21-23
21. F-66SG系列油分离器 F-66SG Series Oil Separator	24
22. F-66SG系列油分离器制冷能力表	25
23. F-66系列油分离器 F-66 Series Oil Separator	26
24. F-66Q系列储油式油分离器 F-66Q Series Oil-stored Type Oil Separator	27
25. F-66&F-66Q制冷能力表 F-66&F-66Q Series Oil Separator Refrigerating Capacity Table	28-29
26. F-79系列油分离器 F-79 Series Oil Separator	30
27. F-79系列油分离器制冷能力表	31
28. F-86Q系列储油式油分离器 F-86Q Series Oil-stored Type Oil Separator	32-33
29. F-86Q系列储油式油分离器制冷能力表	34-35
30. E-86Q系列储油式油分离器 E-86Q Series Oil-stored Type Oil Separator	36
31. F-96系列二次油分离器 F-96 Series Oil Separator	37-38
32. F-96系列二次油分离器制冷能力表	39-40
33. E-96系列二次油分离器 E-96 Series Oil Separator	41
34. OVS系列螺杆机外置油分离器 OVS Series External Oil Separator for Screw Compressor	42-44
35. ELY系列螺杆机外置油分离器 ELY Series External Oil Separator for Screw Compressor	45-46
36. OWS系列卧式螺杆机油分离器 OWS Series Horizontal Oil Separator for Screw Compressor	47-48
37. OWS系列卧式螺杆机油分离器制冷能力表	49-50
38. OLX螺杆机粗效油过滤器 OLX Screw Compressor Coarse Oil Filter	51
39. FOF螺杆机油过滤器 FOF Oil Filter for Screw Compressor	52
40. FYL系列油流量开关 FYL Series Oil Flow Switch	53
41. FYL油流量开关控制模块 Control Module For FYL Oil Flow Switch	54
42. FOI系列水冷油冷却器 FOI Series Water to Oil Cooler	55
43. FFO系列风冷油冷却器 FFO Series Air Cooled Oil Cooler	56
44. HODKV系列经济器 HODKV Series Economizer	57
45. HODKV系列经济器选型参数表 HODKV Series Economizer Model Selection Form	58
46. HODKS系列经济器 HODKS Series Economizer	59
47. HODKS系列经济器选型参数表 HODKS Series Economizer Model Selection Form	60
48. FOR系列立式储油器 FOR Series Vertical Oil Reservoir	61
49. FOW系列卧式储油器 FOW Series Horizontal Oil Reservoir	62
50. FOK系列油过滤器 FOK Series Oil Filter	63
51. F-OL系列油位控制器 F-OL Series Oil Level Regulator	64-65
52. FOT系列电子油位控制器 FOT Series Electronic Oil Level Controller	66-68

O&F产品, 不断改良更新, 本样本如有更改, 恕不另行通知。

本样本版权为欧达法斯克所有, 未经欧达法斯克公司许可, 不得翻印。

本样本2026版用于替代其它旧版本。本样本中筒径 $\geq \phi 273$ 的立式容器裙座安装孔均为长圆孔(特殊标注除外)。

The products of O&F will be improved constantly. If there were any changes to this catalogue without notice in advance, please kindly understand that.

The copyright of this book belongs to OUDAFASIKE; anybody cannot copy without the permission of

OUDAFASIKE. The earlier editions catalogue will be replaced by Year 2026 Version. In this book, the installation holes for the skirt of vertical vessels with a diameter of $\geq \phi 273$ are all elongated holes (unless otherwise noted).

53. FOO系列浮子式压缩机油位开关 FOO Series Floating-type Oil Level Switch of Compressor	69-70
54. FCV系列液压差止回阀 FCV Series Oil Differential Check Valve	71
55. FSP2系列适配器 FSP2 Series Adapter	72-74
56. F-S系列油路截止阀 F-S Series Cut-off Valve of Oil Circuit	75
57. F-T系列检修阀 F-T Series Service Valve	76
58. FYW系列液位计 FYW Series Liquid Level Meter	77
59. 装设气液分离器的二种形式 2 Installation Methods Of The Accumulator	78
60. 气液分离器 Accumulator	79
61. FA-DT系列气液分离器 FA-DT Series Accumulator	80
62. FA2系列气液分离器 FA2 Series Accumulator	81-82
63. FAB系列气液分离器 FAB Series Accumulator	83
64. 回热器的安装 Installation Of The Regenerator	84
65. FAV-G系列回热型气液分离器 FAV-G Series Accumulator with Heat Exchanger	85
66. FAS系列回热型气液分离器 FAS Series Accumulator with Heat Exchanger	86
67. FAR系列回热器 FAR Series Regenerator	87
68. FHR系列低压储液回热器 FHR Series Low Pressure Liquid Regenerator	88
69. FAH系列三器一体器 FAH Series Receiver Accumulator Cooling&Heating Exchanger Three in one Unit	89
70. FTH系列冷热交换器 FTH Series Cold-Heat Exchanger	90
71. 小型储液器选型 Model Selection for Small Liquid Receiver	91
72. L系列立式储液器 L Series Vertical Liquid Receiver	92
73. L4系列立式储液器 L4 Series Vertical Liquid Receiver	93
74. 45L系列立式储液器 45L Series Vertical Receiver	94
75. W系列卧式储液器 W Series Horizontal Liquid Receiver	95
76. W4系列卧式储液器 W4 Series Horizontal Liquid Receiver	96
77. 储液器选型 Liquid Receiver Model Selection	97
78. E1L系列立式储液器 E1L Series Vertical Liquid Receiver	98
79. ECL系列立式储液器 ECL Series Vertical Liquid Receiver	99
80. E2W系列卧式储液器 E2W Series Horizontal Liquid Receiver	100
81. ECW系列卧式储液器 ECW Series Horizontal Liquid Receiver	101
82. EMW系列大型卧式储液器 EMW Series Large Horizontal Liquid Receiver	102-103
83. E5OPY系列排液桶 E5OPY Series Liquid Discharging Bucket	104-105
84. FNW系列氟用低压循环桶 FNW Series Fluorine Low-pressure Circulation Barrel	106-110
85. EHC系列立式虹吸储液器 EHC Series Vertical Siphon Receiver	111-112
86. WHX系列卧式虹吸罐 WHX Series Horizontal Siphon Tank	113-114
87. WHX系列卧式虹吸罐制冷能力表 WHX Series Horizontal Siphon Tank Refrigerating Capacity Table	115
88. LHX系列立式虹吸罐 LHX Series Vertical Siphon Tank	116-118
89. FAO系列虹吸油冷板式换热器 FAO Series Siphon Oil-cooled Plate Heat Exchanger	119-120
90. FV系列安全阀 FV Series Safety Valve	121
91. FZ系列安全阀用截止阀&F-W系列安全阀用切换阀	122-123
92. FSO系列油管路视镜 FSO Series Oil Line Sight Glass	124
93. FSG系列视镜 FSG Series Sight Glass	125
94. FSZ系列组合式视镜 FSZ Series Combined Type Sight Glass	126
95. SVD系列截止阀 SVD Series Cut-off Valve	127
96. SCV系列截止止回阀 SCV Series Stop Cut-off Valve	128
97. F-LS系列压力软管 F-LS Series Capillary Hose	129-132
98. 排管蒸发器热氟融霜系统图 Hot Fluorine Defrosting System for Coil Evaporator Diagram	133
99. 四通换向热氟融霜系统图 Four-way Reversing Hot Fluorine Defrosting System Diagram	134
100. 应用技术示意图 Schematic Diagram of Application Technology	135
101. 工程数据参考-1 Engineering Data Reference-1	136
102. 工程数据参考-2 Engineering Data Reference-2	137
103. 工程数据参考-3 Engineering Data Reference-3	138
104. 工程数据参考-4 Engineering Data Reference-4	139
105. 工程数据参考-5 Engineering Data Reference-5	140
106. ODS接管家族 ODS Connector Family	141
107. DN接管家族 DN Connector Family	142
108. 法兰家族 Flange Family	143
109. 尊敬的客户	144


FDK Series Filter Driers FDK系列干燥过滤器

FDK系列液管干燥过滤器采用的是整块干燥滤芯设计, 滤芯成分是80%分子筛+20%氧化铝。

- 最大许可运行压力: 42bar;
- 最高运行温度: 120°C;
- 过滤精度: 25μm;
- 超强的吸水性,同时可去除系统内多余的酸份;
- 与制冷剂和润滑油具有良好的相容性;
- 抗震动, 压降小, 可有效地过滤杂质;
- 适用于: R134a,R22,R407C,R404A,R507A,R410A。


FDK series filter driers are for use in the liquid line of the system, it features a single piece of solid core, with a composition of 80% molecular sieve and 20% activated alumina.

- Maximum allowable working pressure (MAWP): 42 bar;
- Maximum working temperature: 120°C;
- Filtration precision: 25μm;
- High moisture absorption and acid removal;
- Excellent compatibility with refrigerants and lubricants;
- Vibration-resistant with minimal pressure drop, effectively filtering contaminants;
- Applicable refrigerants: R134a, R22, R407C, R404A, R507A, R410A.

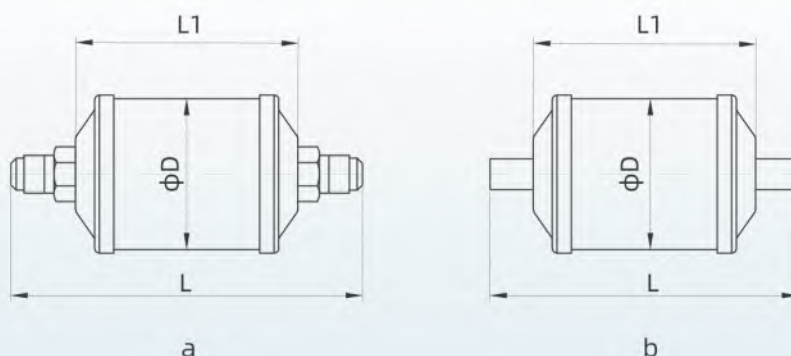

型号 Model	接口尺寸 Conn. Size(inch)	φD (mm)	L (mm)	L1 (mm)	图例 Fig.
FDK-052	1/4" SAE	64	113	73	a
FDK-052S	1/4" ODS	64	109	73	b
FDK-053	3/8" SAE	64	127	73	a
FDK-053S	3/8" ODS	64	111	73	b
FDK-083	3/8" SAE	64	147	93	a
FDK-083S	3/8" ODS	64	131	93	b
FDK-084	1/2" SAE	64	155	93	a
FDK-084S	1/2" ODS	64	133	93	b
FDK-163	3/8" SAE	64	171	117	a
FDK-163S	3/8" ODS	64	155	117	b
FDK-164	1/2" SAE	64	179	117	a
FDK-164S	1/2" ODS	64	157	117	b
FDK-165	5/8" SAE	64	183	117	a
FDK-165S	5/8" ODS	64	163	117	b

- 进出口设计为坚固的碳钢接口;
- 过滤器标准配制2个金属过滤网;
- 作为供液管过滤器使用时, 安装FJ-48A固体干燥滤芯可以过滤系统内杂质、吸收水分和酸性物质;
- 作为吸气管过滤器使用时, 为了减少压力降, 建议拆掉2个金属过滤网。使用FRE-48纤维百褶滤芯或FRE-48W不锈钢滤芯, 可有效的过滤掉系统内的杂质, 避免脏物进入压缩机延长压缩机的使用寿命;
- 通过高精度的法兰、组装式滤芯架和安装弹簧使更换滤芯变得非常容易;
- 装有测量压力降和充注用的检修口;
- 设计压力: 2.9 MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。
- The inlet and outlet are made by stable carbon steel;
- The filter is standard assembled with 2 pieces of metal filter screens;
- When you use the filter in the liquid line, please use the filter core FJ-48A which can filter out the dirt in the system, and it also can absorb the water and acid materials;
- When you use the filter in the suction line, in order to reduce the pressure drop, we suggest that you should disassemble 2 pieces of metal filter screens. And you can use the filter core FRE-48 or FRE-48W which can filter out the dirt in the system, and it also can prevent the dirt to enter into the compressor for prolonging the service life;
- With the design of high-accuracy flange and modular filter core support and assembled spring, it is so easy for you to replace the filter core;
- There is a access hole for measuring the pressure drop and charging function;
- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.


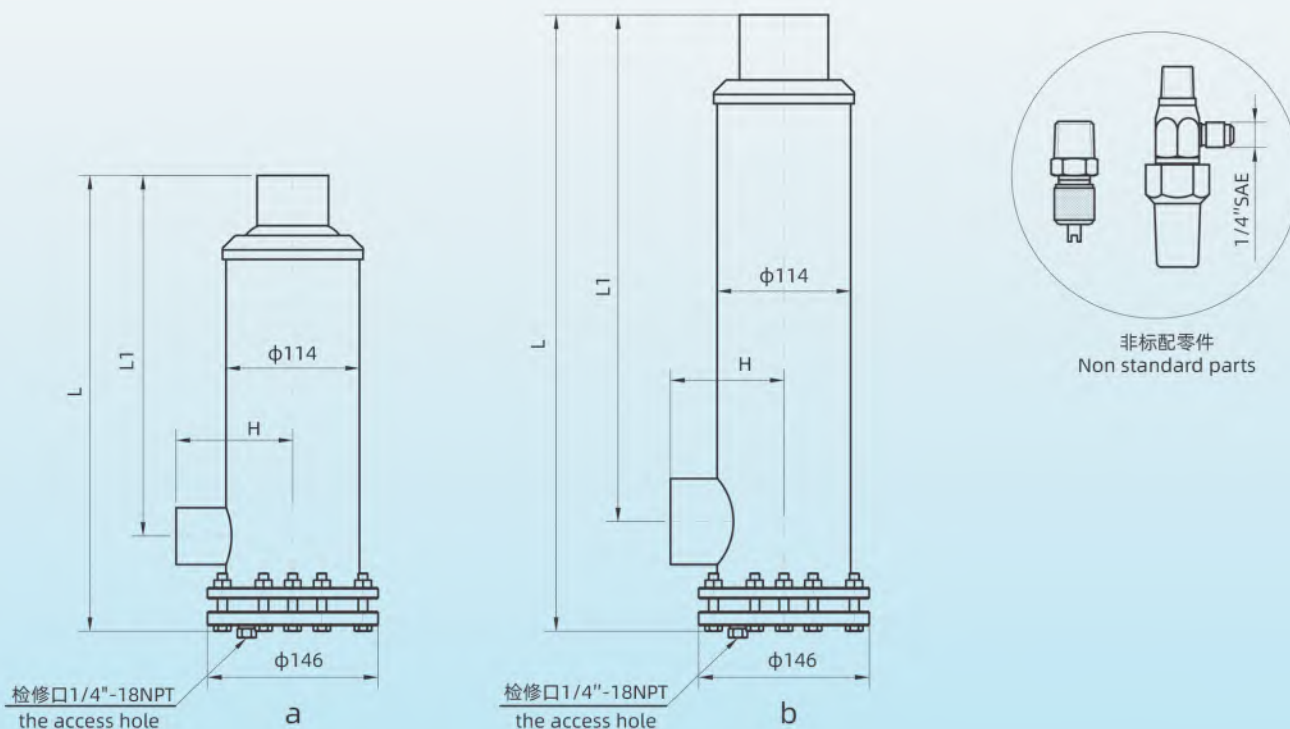


FE Series Replaceable Core Filter FE系列可换滤芯过滤器

型号 Model	芯数 (个) Core-Quantity (Piece)	ODS接口铜管 ODS Conn. copper tube (inch)	对焊接口钢管 Butt-jointed steel tube (mm)	L (mm)	L1 (mm)	H (mm)	容积 Volume (l)	图例 Fig.
FE-485	1	5/8"	----	224	156	76	1.6	a
FE-487	1	7/8"	φ25×2.5	234	163	86	1.6	a
FE-489	1	1-1/8"	φ32×3.0	234	160	85	1.6	a
FE-4811	1	1-3/8"	φ38×3.0	244	166	96	1.6	a
FE-4813	1	1-5/8"	φ45×3.0	244	162	96	1.6	a
FE-4817	1	2-1/8"	φ57×3.5	246	158	97	1.6	b
FE-4821	1	2-5/8"	φ76×4.0	249	151	97	1.6	b
FE-4825	1	3"	φ89×4.0	255	155	96	1.6	b
FE-967	2	7/8"	φ25×2.5	379	308	86	2.9	a
FE-969	2	1-1/8"	φ32×3.0	379	305	85	2.9	a
FE-9611	2	1-3/8"	φ38×3.0	389	311	96	2.9	a
FE-9613	2	1-5/8"	φ45×3.0	389	307	96	2.9	a
FE-9617	2	2-1/8"	φ57×3.5	390	302	97	2.9	b
FE-9621	2	2-5/8"	φ76×4.0	395	297	97	2.9	b
FE-9625	2	3"	φ89×4.0	400	300	96	2.9	b
FE-1449	3	1-1/8"	φ32×3.0	524	450	85	4.2	a
FE-14411	3	1-3/8"	φ38×3.0	534	456	96	4.2	a
FE-14413	3	1-5/8"	φ45×3.0	534	452	96	4.2	a
FE-14417	3	2-1/8"	φ57×3.5	536	448	97	4.2	b
FE-14421	3	2-5/8"	φ76×4.0	540	445	97	4.2	b
FE-14425	3	3"	φ89×4.0	545	445	96	4.2	b
FE-19211	4	1-3/8"	φ38×3.0	679	601	96	5.5	a
FE-19213	4	1-5/8"	φ45×3.0	679	597	96	5.5	a
FE-19217	4	2-1/8"	φ57×3.5	681	593	97	5.5	b
FE-19221	4	2-5/8"	φ76×4.0	685	590	97	5.5	b
FE-19225	4	3"	φ89×4.0	690	590	96	5.5	b

- 进出口设计为坚固的碳钢接口;
- 过滤器标准配制2个金属过滤网;
- 作为供液管过滤器使用时, 安装FJ-100A固体干燥滤芯可以过滤系统内杂质、吸收水分和酸性物质;
- 作为吸气管过滤器使用时, 为了减少压力降, 建议拆掉2个金属过滤网. 使用FRE-100纤维百褶滤芯或FRE-100W不锈钢滤芯, 可有效的过滤掉系统内的杂质, 避免脏物进入压缩机, 延长压缩机的使用寿命;
- 通过高精度的法兰、组装式滤芯架和安装弹簧使更换滤芯变得非常容易;
- 装有测量压力降和充注用的检修口;
- 设计压力: 2.9MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

- The inlet and outlet are made by stable seamless steel pipe.
- The filter is standard assembled with 2 pieces of metal filter screens;
- When you use the filter in the liquid line, please use the filter core FJ-100A which can filter out the dirt in the system, and it also can absorb the water and acid materials;
- When you use the filter in the suction line, in order to reduce the pressure drop, we suggest that you should disassemble 2 pieces of metal filter screens. And you can use the filter core FRE-100 or FRE-100W which can filter out the dirt in the system, and it also can prevent the dirt to enter into the compressor for prolonging the service life;
- With the design of high-accuracy flange and modular filter core support and assembled spring, it is so easy for you to replace the filter core;
- There is a access hole for measuring the pressure drop and charging function;
- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

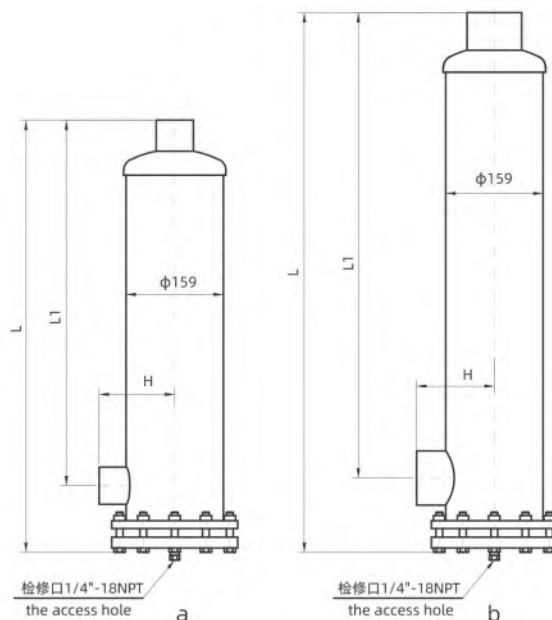


非标配零件
Non standard parts

型号 Model	芯数 (个) Core-Quantity(Piece)	ODS接口铜管 (inch)	对焊接口钢管 (mm)	L (mm)	L1 (mm)	H (mm)	容积(l) Volume(l)	图例 Fig.
FEM-10021	1	2-5/8"	φ76×4.0	376	259	125	5.0	a
FEM-10025	1	3"	φ89×4.0	381	259	127	5.0	b
FEM-10034	1	---	φ108×4.0	393	260	160	5.0	b
FEM-20017	2	2-1/8"	φ57×3.5	534	424	124	8.0	a
FEM-20021	2	2-5/8"	φ76×4.0	545	428	125	8.0	a
FEM-20025	2	3"	φ89×4.0	550	428	127	8.0	b
FEM-20034	2	---	φ108×4.0	562	429	160	8.0	b
FEM-30013	3	1-5/8"	φ45×3.0	700	596	119	11.0	a
FEM-30017	3	2-1/8"	φ57×3.5	703	594	124	11.0	a
FEM-40013	4	1-5/8"	φ45×3.0	869	766	119	14.0	a
FEM-40017	4	2-1/8"	φ57×3.5	872	763	124	14.0	a
FEM-40021	4	2-5/8"	φ76×4.0	883	766	125	14.0	a
FEM-40025	4	3"	φ89×4.0	888	766	127	14.0	b
FEM-40034	4	---	φ108×4.0	900	767	160	14.0	b

FN Series Replaceable Core Filter FN 系列可换滤芯过滤器


- 过滤器的进出口接管为坚固无缝钢管;
- 过滤器标准配制2个金属过滤网;
- 如果过滤器在吸气管路上使用, 为了减少压力降, 建议不安装金属过滤网;
- 压缩机初始运行200小时内应使用高过滤精度的FRE-48纤维百褶滤芯; 为了降低吸气侧压损, 200小时后应使用FRE-48W不锈钢滤芯;
- 通过高精度的法兰、组装式滤芯架和安装弹簧使更换滤芯变得非常容易;
- 装有测量压力降和充注用的检修口;
- 设计压力: 2.9MPa;
- 适用制冷剂: R134a,R407C,R404A,R507A。
- The inlet and outlet pipe of the filter is a strong seamless steel pipe;
- Filter standard configuration with 2 metal strainer meshes;
- If the filter is used on the suction line, in order to reduce the pressure drop, it is recommended not to install the metal strainer mesh;
- FRE-48 fiber fold filter core shall be used within 200 hours of initial compressor running; in order to reduce suction side pressure loss, FRE-48W stainless steel filter core shall be used after 200 running hours;
- Through the high precision flange, the assembled filter core frame and the spring make the replacement filter core becomes very easy;
- Equipped with a check port for measuring pressure drop and injection;
- The design pressure: 2.9MPa;
- Applicable refrigerant: R134a,R407C,R404A,R507A。

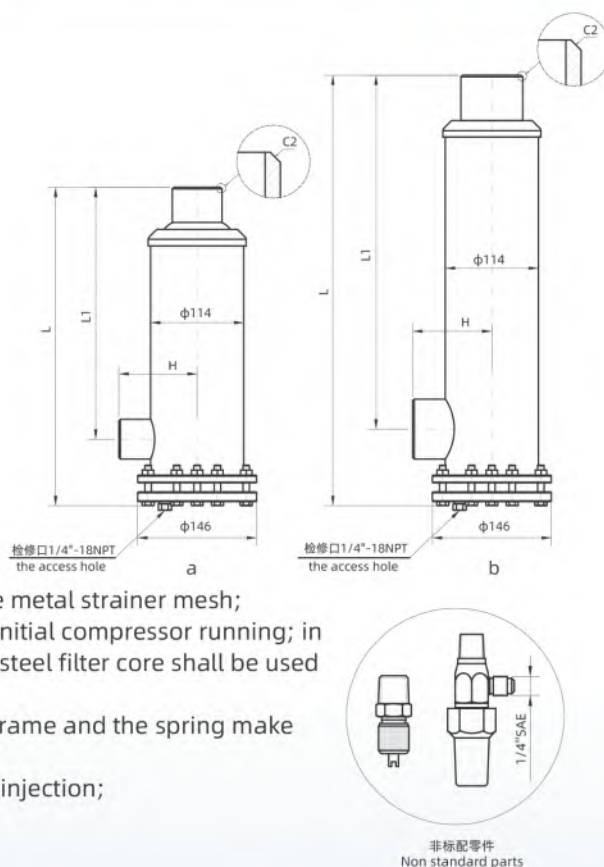

型号 Model	芯数 (个) Core-Quantity (Piece)	接口尺寸 Joint Size (mm)	L (mm)	L1 (mm)	H (mm)	容积 Volume (l)	图例 Fig.
FN-4832	1	φ38×3.0	244	166	96	1.6	a
FN-4850	1	φ57×3.5	247	159	97	1.6	a
FN-4865	1	φ76×4.0	249	152	97	1.6	a
FN-4880	1	φ89×4.0	255	155	97	1.6	a
FN-9632	2	φ38×3.0	389	311	96	2.9	a
FN-9650	2	φ57×3.5	392	304	97	2.9	a
FN-9665	2	φ76×4.0	395	298	97	2.9	a
FN-9680	2	φ89×4.0	401	300	97	2.9	a
FN-14432	3	φ38×3.0	534	456	96	4.2	b
FN-14450	3	φ57×3.5	537	449	97	4.2	b
FN-14465	3	φ76×4.0	539	442	97	4.2	b
FN-14480	3	φ89×4.0	545	445	97	4.2	b
FN-19232	4	φ38×3.0	679	601	96	5.5	b
FN-19250	4	φ57×3.5	682	594	97	5.5	b
FN-19265	4	φ76×4.0	684	587	97	5.5	b
FN-19280	4	φ89×4.0	690	590	97	5.5	b


- 45FN系列可更换滤芯液管过滤器是为了R410A和CO₂亚临界制冷装置开发的。
- 过滤器的进出口接管为坚固无缝钢管；
- 最大许可运行压力：4.5 MPa；
- 适用制冷剂：R410A, R744 (CO₂)。

- The 45FN series of replaceable-filter-core liquid line filters is developed for R410A and subcritical CO₂ refrigeration systems.
- The filter's inlet and outlet connections are constructed from robust, seamless steel pipes.
- Maximum allowable working pressure (MAWP): 4.5 MPa.
- Applicable refrigerants: R410A, R744 (CO₂).

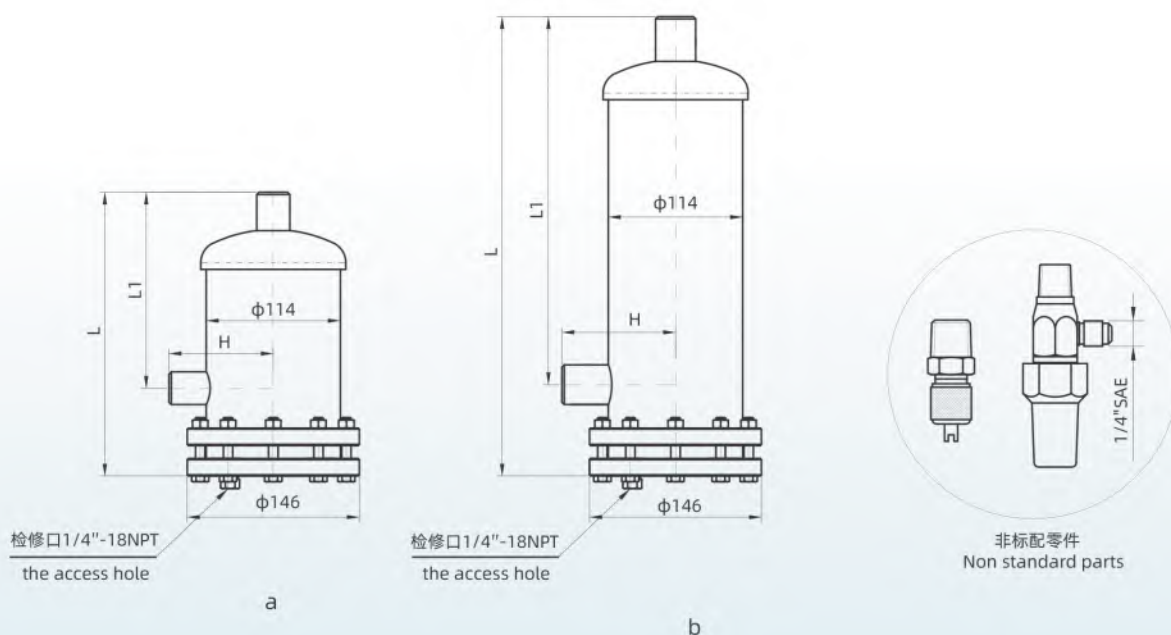


型号 Model	芯数 (个) Core-Quantity (Piece(s))	接口尺寸 Conn. Size (mm)	L (mm)	L1 (mm)	H (mm)	容积 Volume (l)	图例 Fig.
45FN-48DN20	1	Ø25×3.0	248	174	92	1.6	a
45FN-48DN25	1	Ø32×3.5	253	176	97	1.6	a
45FN-96DN25	2	Ø32×3.5	398	321	97	2.9	b
45FN-96DN32	2	Ø38×5.0	400	320	99	2.9	b

- 130FN系列可更换滤芯液管过滤器是为了CO₂跨临界制冷装置开发的。
 - 过滤器的进出口接管为坚固无缝钢管；
 - 最大许可运行压力: 13 MPa；
 - 适用制冷剂: R744 (CO₂)。
-
- The 130FN series of replaceable-filter-core liquid line filters is developed for transcritical CO₂ refrigeration systems.
 - The filter's inlet and outlet connections are constructed from robust, seamless steel pipes.
 - Maximum allowable working pressure (MAWP): 13 MPa.
 - Applicable refrigerant: R744 (CO₂).

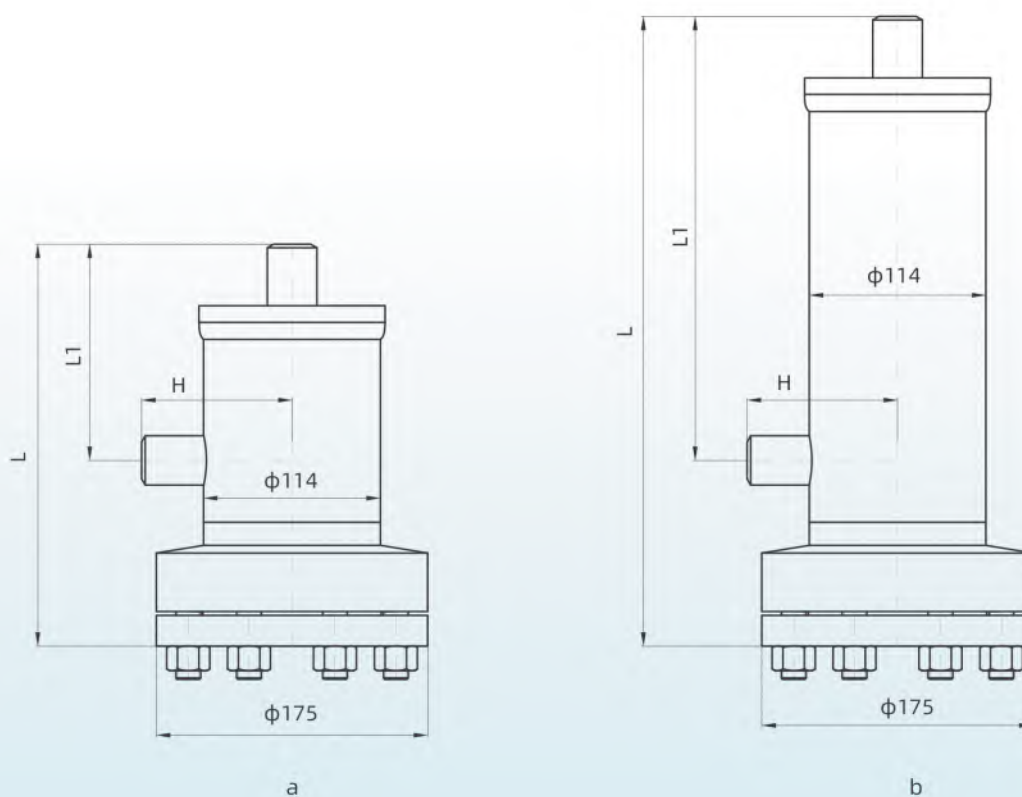

型号 Model	芯数 (个) Core-Quantity (Piece(s))	接口尺寸 Conn. Size (mm)	L (mm)	L1 (mm)	H (mm)	容积 Volume (l)	图例 Fig.
130FN-48DN25	1	Ø34×5	261	141	97	1.5	a
130FN-96DN25	2	Ø34×5	409	289	97	2.7	b

- 过滤器的进出口接管为坚固无缝钢管;
- 过滤器标准配制2个金属过滤网;
- 如果过滤器在吸气管路上使用, 为了减少压力降, 建议不安装金属过滤网;
- 压缩机初始运行200小时内应使用高过滤精度的FRE-100纤维百褶滤芯; 为了降低吸气侧压损, 200小时后应使用FRE-100W不锈钢滤芯;
- 通过高精度的法兰、组装式滤芯架和安装弹簧使更换滤芯变得非常容易;
- 装有测量压力降和充注用的检修口;
- 设计压力: 2.9MPa;
- 适用制冷剂: R134a,R407C,R404A,R507A。
- The inlet and outlet pipe of the filter is a strong seamless steel pipe;
- Filter standard configuration with 2 metal strainer meshes;
- If the filter is used on the suction line, in order to reduce the pressure drop, it is recommended not to install the metal strainer mesh;
- FRE-100 fiber fold filter core shall be used within 200 hours of initial compressor running; in order to reduce suction side pressure loss, FRE-100W stainless steel filter core shall be used after 200 running hours;
- Through the high precision flange, the assembled filter core frame and the spring make the replacement filter core becomes very easy;
- Equipped with a check port for measuring pressure drop and injection;
- The design pressure: 2.9MPa;
- Applicable refrigerant: R134a,R407C,R404A,R507A.

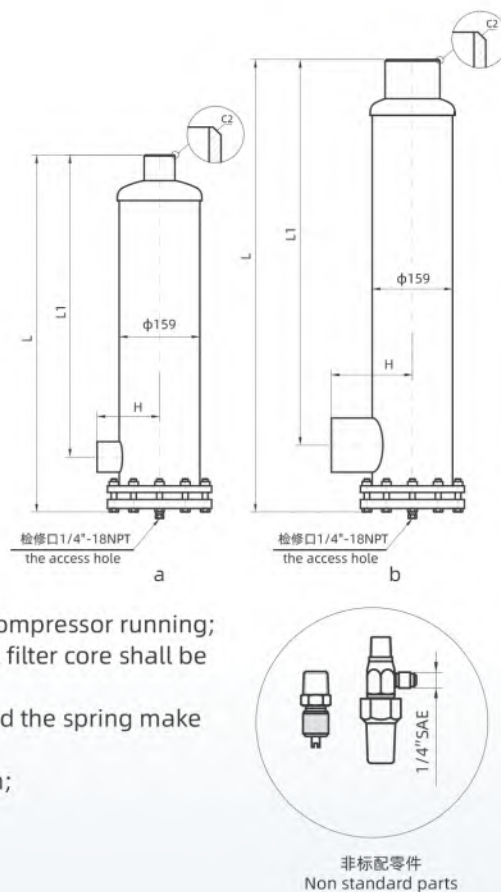


型号 Model	芯数 (个) Core-Quantity (Piece)	接口尺寸 Joint Size (mm)	L (mm)	L1 (mm)	H (mm)	容积 Volume (l)	图例 Fig.
FNM-10050	1	φ57×3.5	364	256	124	5	a
FNM-10065	1	φ76×4.0	374	259	125	5	a
FNM-10080	1	φ89×4.0	378	258	127	5	a
FNM-20050	2	φ57×3.5	533	425	124	8	a
FNM-20065	2	φ76×4.0	543	428	125	8	a
FNM-20080	2	φ89×4.0	547	427	127	8	a
FNM-30050	3	φ57×3.5	701	594	124	11	b
FNM-30065	3	φ76×4.0	711	596	125	11	b
FNM-30080	3	φ89×4.0	716	596	127	11	b
FNM-40050	4	φ57×3.5	871	763	124	14	b
FNM-40065	4	φ76×4.0	881	766	125	14	b
FNM-40080	4	φ89×4.0	885	765	127	14	b


FEP Series Combined Type Relaceable Core Filter Drier FEP 系列组合式可换滤芯过滤器

- 专业用于大型制冷装置供液管道和回气管道过滤, 可有效的过滤掉系统内的杂质;
- 大筒体设计和超大的过滤面积, 使压力降变得非常小;
- 进出口接管为坚固无缝钢管;
- 通过高精度的法兰、组装式滤芯架和安装弹簧使更换滤芯变得非常容易;
- 作为供液管过滤器使用时, 安装FJ-48系列干燥过滤芯可以过滤系统内杂质, 吸收水分和酸性物质;
- 作为吸气管过滤器使用时, 为了减少压力降, 建议拆掉孔板和过滤丝网, 并使用FRE-48系列吸气滤芯。压缩机初始运行200小时内, 应使用高过滤精度的FRE-48纤维百褶滤芯。压缩机运行200小时后, 应使用低压力降的FRE-48W不锈钢滤芯;
- 壳体内壁镀镍, 可有效的防止遇到水分时生锈;
- 装有测量压力降和充注用的检修口;
- 最大许可运行压力: 2.5 MPa;
- 适用制冷剂: R134a, R22, R407C, R404A, R507A。

- Professional used for liquid and suction lines of large refrigeration systems, can effectively filter out the contaminants in the system;
- Large shell design and large filter area, so that the pressure drop becomes very low;
- Inlet and outlet connection are strong seamless steel pipe;
- It is very easy to replace the filter core through high-precision flange, assembly filter core frame and installation spring;
- When used as a liquid line filter drier, install FJ-48 series dried filter core can filter contaminants in the system and absorb moisture and acid;
- When used as a suction line filter, to reduce the pressure drop, it is recommended to remove the hole plate and filter screen and use the FRE-48 series suction filter core. Within 200 hours of initial operation of the compressor, FRE-48 pleated fiber core with high filtration accuracy shall be used. After 200 hours, FRE-48W stainless steel filter core shall be used;
- Shell inner wall nickel plating, can effectively prevent rust when encountering water;
- Equipped with a packed shut-off valve(with schrader service port) for measuring pressure drop and filling;
- Maximum permit working pressure: 2.5 MPa;
- Applicable refrigerants: R134a, R22, R407C, R404A, R507A.

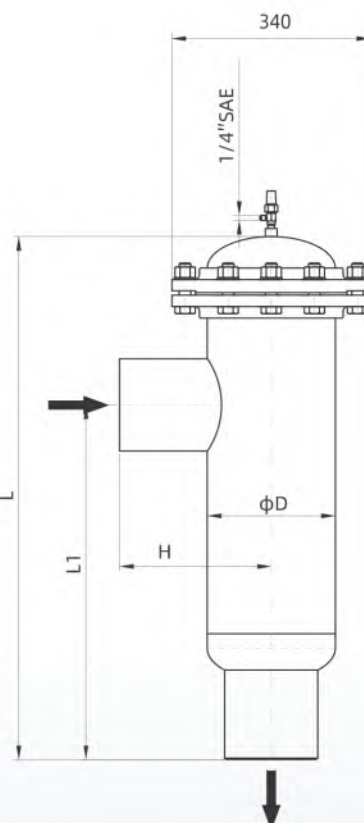

FEP组合式可换滤芯过滤器内部结构图
FEP Series Combined Type Relaceable Core Filter Driers

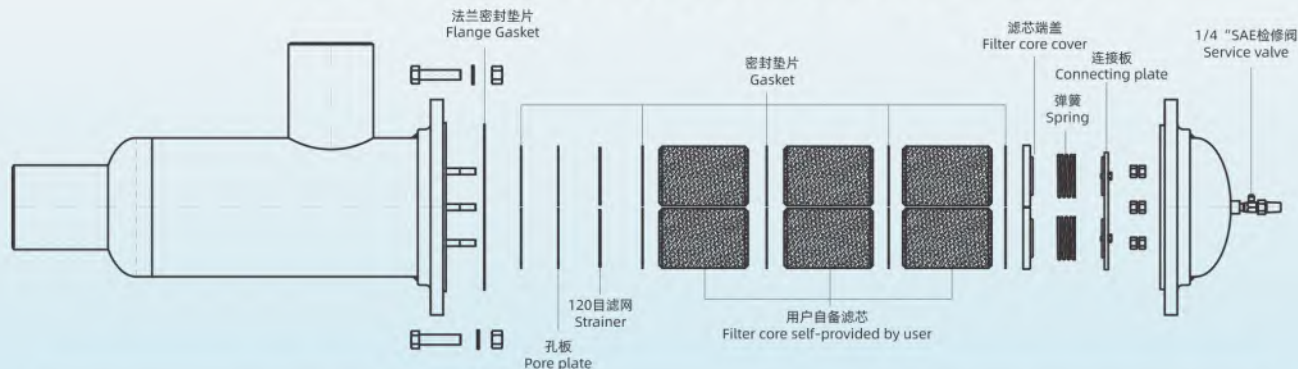

型号 Model	接口尺寸 Joint Size	芯数 (个) Core-Quantity (Piece)	φD (mm)	H (mm)	L (mm)	L1 (mm)	容积(l) Volume (l)
FEP-288-100	φ108×4.0	6	219	260	603	354	15
FEP-288-125	φ133×4.0	6	219	260	603	342	15
FEP-288-150	φ159×4.5	6	219	260	618	344	15
FEP-432-100	φ108×4.0	9	219	260	746	497	19
FEP-432-125	φ133×4.0	9	219	260	746	465	19
FEP-576-150	φ159×4.5	12	219	260	905	611	24

FJ-48H/FJ-100H

主要成分Content:100%分子筛100% Molecular Sieve

应用范围Application:R22,R134a,R404a,R507A, etc

性质 Character:

- 超强吸水能力 Super water capacity
- 与制冷剂溶剂油良好的相容性 Compatibility with the blend oil
- 有效地防止杂质 Effectively prevent the impurity
- 抗震动，压降小 Bear the vibration and low pressure drop

FJ-48A/FJ-100A

主要成分Content:80%分子筛+20%Al₂O₃

80%Molecular Sieve+20% Al₂O₃

应用范围Application:R22、R134a、R404a、R207、R124、R125、R507a

R143a, R152a、R128、R23, etc

性质Character:

- 强吸水能力 High water capacity
- 与制冷剂溶剂油良好的相容性 Compatibility with the blend oil
- 有效地防止杂质 Effectively prevent the impurity
- 去除系统内多余酸份 Adsorption of the acid
- 抗震动，压降小 Bear the vibration and low pressure drop

FJ-48C/FJ-100C

主要成分 Content:48%分子筛+47% Al₂O₃+5%C

48% Molecular Sieve+47% Al₂O₃+5%C

应用范围 Application:R22、R134a、R404a、R507,etc

性质 Character:

- 超强酸吸收能力 Super acid capacity
- 标准吸水能力 Standard water Capacity
- 用于修复烧坏的压缩机 Special for "BURNED" system


FJ-48D/FJ-100D

主要成分 Content:100% Al₂O₃


应用范围 Application:R22、R32,etc

性质 Character:

- 标准吸水能力 Standard water Capacity
- 有效地防止杂质 Effectively prevent the impurity
- 去除系统内多余酸份 Adsorption of the acid
- 抗震动，压降小 Bear the vibration and low pressure drop

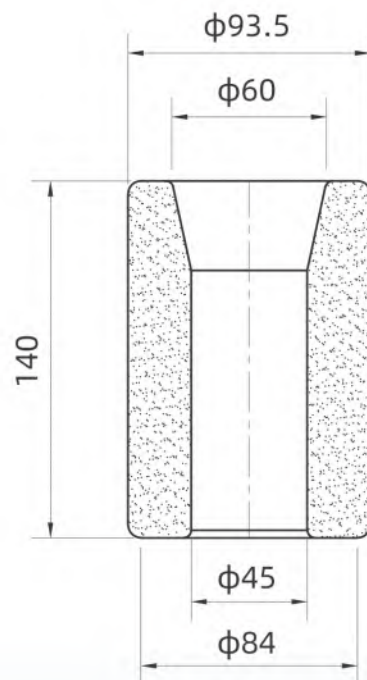

FJ-48

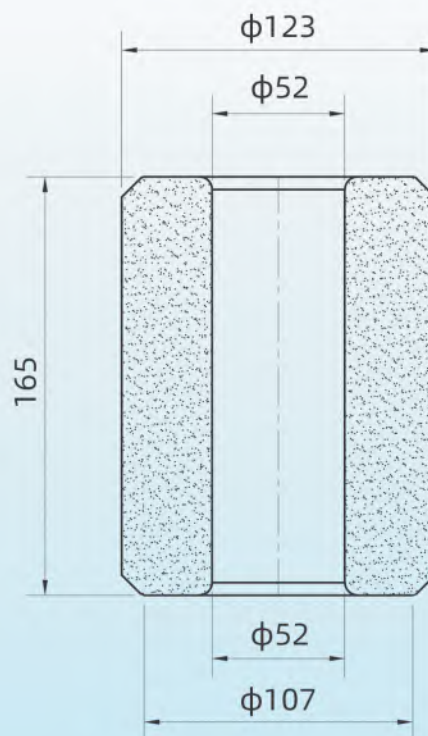


FJ-100

制冷系统在现场安装过程中，不可避免的进入一些脏物，在系统运行时如果不及时将这些脏物清理干净，会对这个系统特别是压缩机造成致命的伤害。因此我们向客户推荐在吸气管路进入压缩机前安装吸气过滤器。

- 适用制冷剂：R134a,R22,R407C,R404A,R507A
- 全新系统运行200小时内，建议使用百褶式纤维滤芯。使用时请注意观察过滤器进出口压力降，建议最大压降不得超过相当于饱和蒸发温度差5℃；
- 系统运行超过200小时后，建议使用不锈钢丝网滤芯，使用时请注意观察过滤器进出口压力降，建议最大压降不得超过相当于饱和蒸发温度差0.5℃。

During the installation process to the refrigeration system, it will be unavoidable to let the dirt enter into the system. If the dirt can not be cleaned out in time when the system is running, it would have made deadly damage to the system especially to the compressor. That is the reason why we recommend our customer to install the filter for suction line before it entering into the compressor.

- Applicable refrigerant: R134a,R22,R407C,R404A,R507A
- To the brand-new system, when it is running within 200 hours, we recommend to use pleated fibre filter core. During use it please be attention to observe the pressure drop between the inlet and outlet of the filter, we recommend that the maximum value of it can not be bigger than the value amount to the saturated evaporation temperature difference 0.5℃.
- To the system which is running more than 200 hours, we recommend to use stainless steel wire filter core. During use it please be attention to observe the pressure drop between the inlet and outlet of the filter, we recommend that the maximum value of it can not be bigger than the value amount to the saturated evaporation temperature difference 0.5℃.

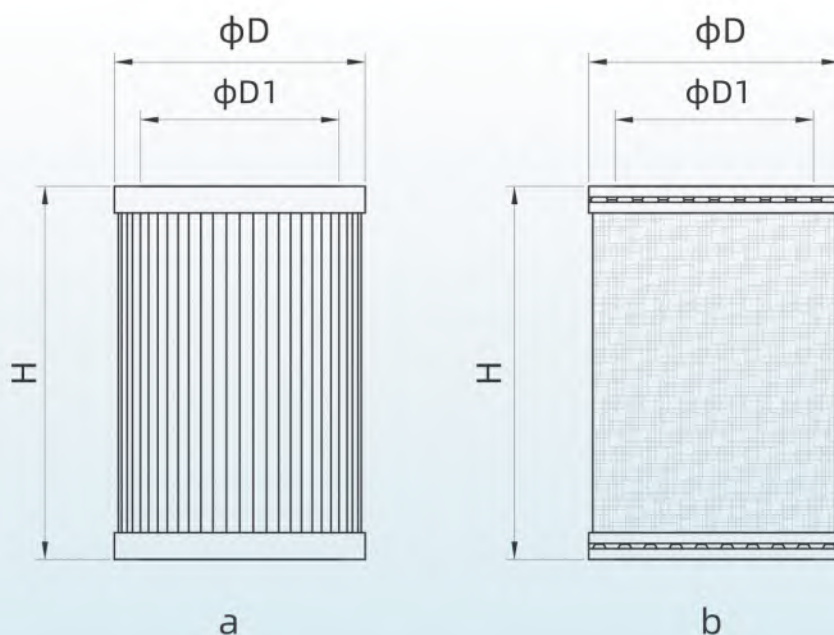



型号 Model	过滤材料 Filter Material	φD (mm)	φD1 (mm)	H (mm)	温度范围 Temperature Range (℃)	过滤精度 Filter Accuracy (μm)	图例 Fig.
FRE-48	百褶式纤维 Pleated fibre	94	70	140	-50℃~+100℃	25	a
FRE-48W	不锈钢丝网 Stainless steel wire	94	74	140	-50℃~+150℃	250	b
FRE-100	百褶式纤维 Pleated fibre	120	90	166	-50℃~+100℃	25	a
FRE-100W	不锈钢丝网 Stainless steel wire	120	90	166	-50℃~+150℃	250	b

活塞式和螺杆式压缩机工作过程中, 压力的脉冲会进入排气管。通过连接的管路, 脉冲振动会引起系统的噪音和震动, 严重的会导致管道破裂。为了减少这些脉冲震动, 建议在压缩机排气管上安装消声器。


- 安装在避震软管的后边;
- 设计压力: 2.9MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

The pressure pulse will enter into the discharge line during the running process of the piston compressor and the screw compressor. The pulse will cause the system to shock and have noises through the connected lines, and even more serious it will damage the lines. In order to decrease the pulse shocking, it is recommended to install the discharge line muffler in discharge line of the compressor.


- To be installed next to the shock-proof hose;
- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

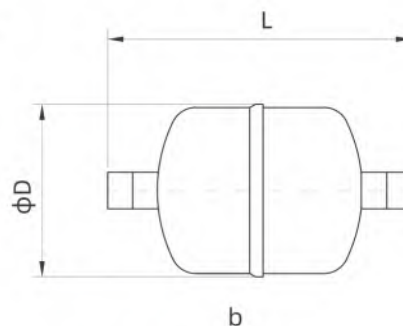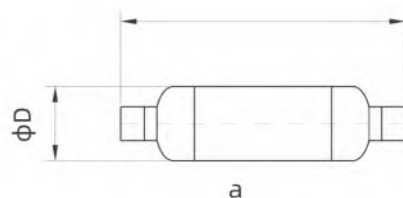

水平安装
horizontal installation

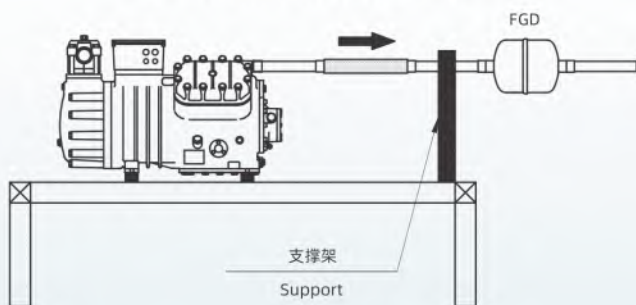


垂直安装
vertical installation

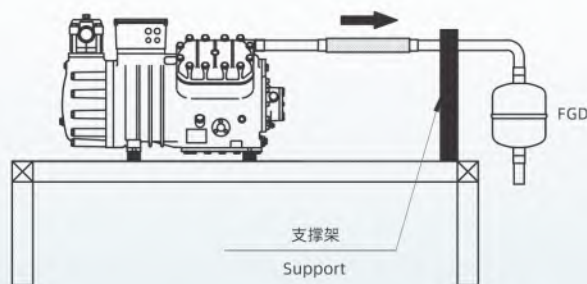


型号 Model	接口尺寸 Joint Size(Inch)	压缩机理论排气量 Theo.Compressor Displacement	φD (mm)	L (mm)	容积 Volume(l)	图例 Fig.
FGD-05	5/8"	23	57	207	0.3	a
FGD-06	3/4"	30	57	205	0.3	a
FGDS-07	7/8"	42	57	217	0.3	a
FGD-07	7/8"	42	127	196	1.1	b
FGD-09	1-1/8"	74	127	212	1.1	b
FGDS-11	1-3/8"	110	127	222	1.1	b
FGD-11	1-3/8"	110	127	344	2.3	b
FGDS-13	1-5/8"	170	127	232	1.1	b
FGD-13	1-5/8"	170	127	353	2.6	b
FGDS-17	2-1/8"	290	127	246	1.1	b
FGD-17	2-1/8"	290	140	490	5.3	b

VAS Series Vibration Eliminator Corrugated Metal Tube VAS系列避震波纹金属软管

- 加厚的紫铜接口与波纹管接头采用独特的对接TIG+FB复合焊接接头设计；波纹管接头与波纹管、承压网套分别采用LBW和RSEW焊接；整体形成内外复合焊接结构，达到高承压和密封能力，且外形美观；
- 良好的柔软性和抗疲劳性，高效吸收震动和载荷，耐高低温，使用寿命长；
- 波纹管材料使用316L，防腐性能优异；
- 许可工作温度：-60 ~ 150°C；
- 适用制冷剂：R134a, R22, R407C, R404A, R507A, R410A。

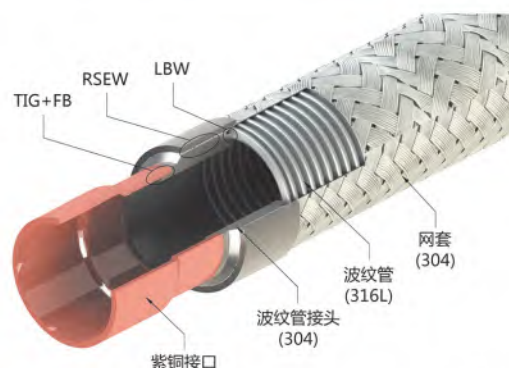

- Adopt unique TIG + FB composite butt-welding design for thickened copper joint and corrugated pipe joint. The corrugated pipe joint, corrugated pipe and pressure net adopt LBW & RSEW welding process; Internal and external composite welding structure, achieve high pressure and good sealing performance, with beautiful appearance.
- Good softness and fatigue resistance, efficient absorption of vibration and load, high and low temperature resistance, long service life.
- The corrugated pipe material uses SUS316L, with excellent anti-corrosion performance;
- Allowable working temperature: -60~150°C.
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A, R410A.

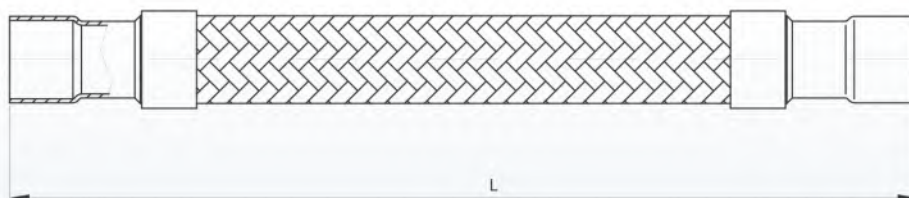

型号 Model	接口尺寸 Joint Size		L (mm)	最大工作压力 Max. Working Pressure (MPa)
	(Inch)	(mm)		
VAS-03	3/8"	---	230	5.0
VAS-M10	---	10mm	230	
VAS-M12	---	12mm	230	
VAS-04	1/2"	---	230	
VAS-05	5/8"	16mm	255	
VAS-06	3/4"	19mm	255	
VAS-07	7/8"	22mm	290	
VAS-08	1"	---	290	
VAS-M28	---	28mm	330	
VAS-09	1-1/8"	---	330	
VAS-10	1-1/4"	32mm	330	
VAS-11	1-3/8"	35mm	375	
VAS-13	1-5/8"	---	430	
VAS-M42	---	42mm	430	
VAS-17	2-1/8"	54mm	510	4.0
VAS-21	2-5/8"	67mm	690	3.5

油分离器选型提示

- 1、当压缩机运行时，带有油颗粒的制冷剂蒸汽一起被压缩机排出，少量的油进入系统内循环不会影响系统的性能，然而过多的油进入系统后，会对流量控制元件产生影响，同时也会影响到蒸发器和冷凝器的能效。
- 2、任何形式的油分离器分油率都不是100%，为了确保压缩机正常工作，一定要规范制冷系统管路的设计和安装。
- 3、虽然样本中给出了油分离器的制冷能力，但压缩机实际的制冷量在不同的工况下变化范围很大，在选择油分离器的时候一定要考虑压缩机在实际使用过程中可能达到的最高蒸发温度（建议要附加15%以上的余量）。
- 4、一定要保证系统的过热度，当压缩机出现湿压缩时油分离器会失效。
- 5、在环境温度低的地方，油分离器筒体必须保温，以便在压缩机停机期间能保持一定的热量。否则在压缩机启动时油分离器会起到一个预冷凝器的作用。如果发生这种情况，油分离器会将冷凝的制冷剂液体送回压缩机曲轴箱内，引起奔油和液击。
- 6、如果想检查油分离器回油功能是否正常，建议在回油管上安装一个视液镜来观察回油情况

Important Notice of Oil Separator Selection

- 1.During the compressor running process, refrigerant vapor containing oil particles is discharged by the compressor. A little oil entering the system for circulation does not affect system performance. However, excessive oil entering the system may impact flow control components and also reduce the energy efficiency of the evaporator and condenser.
- 2.No oil separator achieves 100% oil separation efficiency. To ensure compressor work normally, standardized design and installation of refrigeration system piping are essential.
- 3.Although the refrigeration capacity of the oil separator is specified in this catalogue book, the compressor's actual cooling capacity varies significantly under different working conditions. When selecting an oil separator, it is essential to think about the max. evaporating temperature the compressor may reach during actual running process (a margin of over 15% is recommended).
- 4.Ensure the system maintains proper suction superheat. The oil separator will fail when the compressor works in wet compression mode.
- 5.In low-temperature environments, the oil separator body must be insulated to retain heat during compressor shutdown. Otherwise, the oil separator will function as a pre-condenser when the compressor starts. In such cases, the oil separator may force condensed refrigerant back into the compressor crankcase, causing oil running and liquid slugging.
- 6.To verify the oil separator's return function, install a sight glass on the oil return line to monitor the oil flow.

制冷范围划分

Refrigeration range partitioning

- 高温范围（H）：- 蒸发温度（ t_0 ）+5℃
- High temperature range (H) - Evaporating temperature(t_0) +5℃
- 中温范围（M）：- 蒸发温度（ t_0 ）-10℃
- Medium temperature range (M) - Evaporating temperature(t_0) -10℃
- 低温范围（L）：- 蒸发温度（ t_0 ）-25℃
- Low temperature range (L) - Evaporating temperature(t_0) -25℃
- 超低温范围（Z）：- 蒸发温度（ t_0 ）-40℃
- Ultra-low temperature range (Z) - Evaporating temperature(t_0) -40℃

警告：冷凝温度变化会影响油分离器的制冷能力

油分离器选型案例（以下为某台压缩机的最高运行工况）

已知参数：

制冷剂：R507A

蒸发温度：5℃

冷凝温度：30℃

制冷量：100kW

冷凝温度修正系数：

制冷剂	蒸发温度 ℃	冷凝温度℃										
		10	15	20	25	30	35	40	45	50	55	60
R22	-40	0.57	0.63	0.70	0.77	0.85	0.92	1.00	1.08	1.15	1.22	1.29
	-25	0.56	0.63	0.70	0.77	0.85	0.92	1.00	1.08	1.16	1.23	1.31
	-10	0.56	0.62	0.69	0.77	0.84	0.92	1.00	1.08	1.16	1.24	1.32
	5	0.56	0.62	0.69	0.76	0.84	0.92	1.00	1.08	1.17	1.25	1.33
R404A/ R507A	-40	0.67	0.73	0.79	0.85	0.91	0.96	1.00	1.03	1.04	1.04	1.00
	-25	0.65	0.71	0.78	0.84	0.90	0.95	1.00	1.04	1.07	1.07	1.06
	-10	0.64	0.70	0.76	0.83	0.89	0.95	1.00	1.05	1.08	1.10	1.10
	5	0.62	0.69	0.75	0.82	0.88	0.94	1.00	1.05	1.10	1.13	1.14

选型计算：


油分离器修正系数=0.88


$100\text{kW} \div 0.88 \approx 113.6\text{kW}$

注：建议另加15%的余量

$113.6 \times 1.15 = 130.64\text{kW}$

油分离器选取F-8613QA

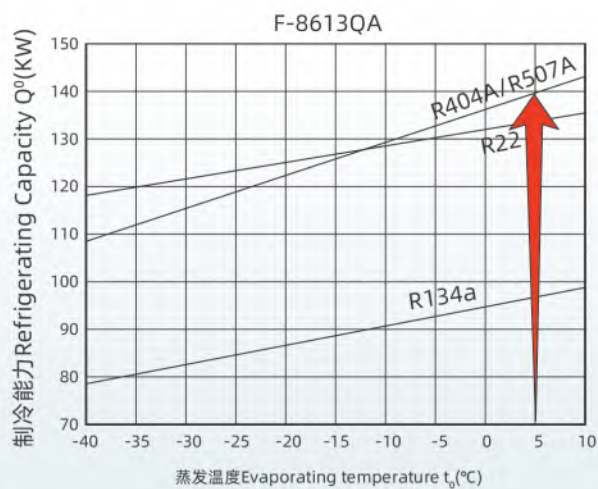




从压缩机排出的带有悬浮油颗粒的制冷剂蒸汽进入到油分离器中, 制冷剂蒸汽携带的油颗粒经过进口金属丝网、出口金属丝网的拦截, 微小的油颗粒之间相互撞击并形成较重的油滴, 这些较重的油滴最终撞击在油分离器的内壁上, 此处具有最终分离作用。被分离出来的油滴落到油分离器的底部, 并通过此处安装的浮球阀将油返回到曲轴箱或储油器中。

- 最大许可运行压力: 3.1 MPa
- 浮球回油阀最大工作压差: 2.5MPa
- 适用制冷剂: R134a, R22, R407C, R404A, R507A
- F-52DT系列最大许可运行压力: 4.1 MPa, 适用制冷剂: R410A

When the refrigeration compressor operating, the refrigerant vapor with the suspending fog particles of lubricating oil discharged into the oil separator, the refrigerant vapor carries the oil through the import and export wire mesh interception, The oil particles impact with each other and form the heavier oil particles eventually hit on the inner wall of the oil separator, here has the final separation effect. The separated oil drops to the bottom of the oil separator and returns the oil to the crankcase or reservoir through a floating ball valve installed here.


- Maximum permit working pressure: 3.1 MPa
- Maximum working pressure difference of floating ball oil return valve: 2.5MPa
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A
- Maximum permit working pressure of F-52DT series: 4.1MPa, Applicative refrigerants: R410A

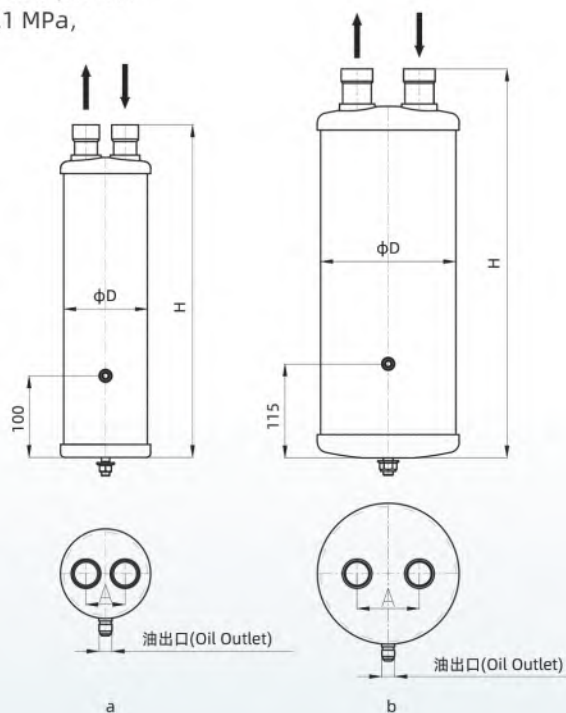

型号 Model	接口尺寸 Joint Size (mm)	φD (mm)	H (mm)	A (mm)	油出口 Oil Outlet (SAE)	初始注油量 First Oil Charge (l)	容积 Volume (l)	图例 Fig.
F-5200DT	3/8"	102	261	48	3/8"	0.5	1.5	a
F-5201DT	1/2"	102	261	48	3/8"	0.5	1.5	a
F-5202DT	5/8"	102	328	48	3/8"	0.5	2.0	a
F-5203DT	7/8"	102	385	48	3/8"	0.5	2.3	a
F-5204DT	1-1/8"	102	408	48	3/8"	0.5	2.6	a
F-5205DT	1-3/8"	102	498	48	3/8"	0.5	3.2	a
F-6204DT	1-1/8"	165	427	76	3/8"	1.2	7.9	b
F-6205DT	1-3/8"	165	477	76	3/8"	1.2	8.1	b
F-6206DT	1-5/8"	165	482	82	3/8"	1.2	8.1	b


F-52DT&F-62DT系列油分离器制冷能力表

F-52DT&F-62DT系列油分离器制冷能力表
F-52DT&F-62DT Series Oil Separator Refrigerating Capacity Table

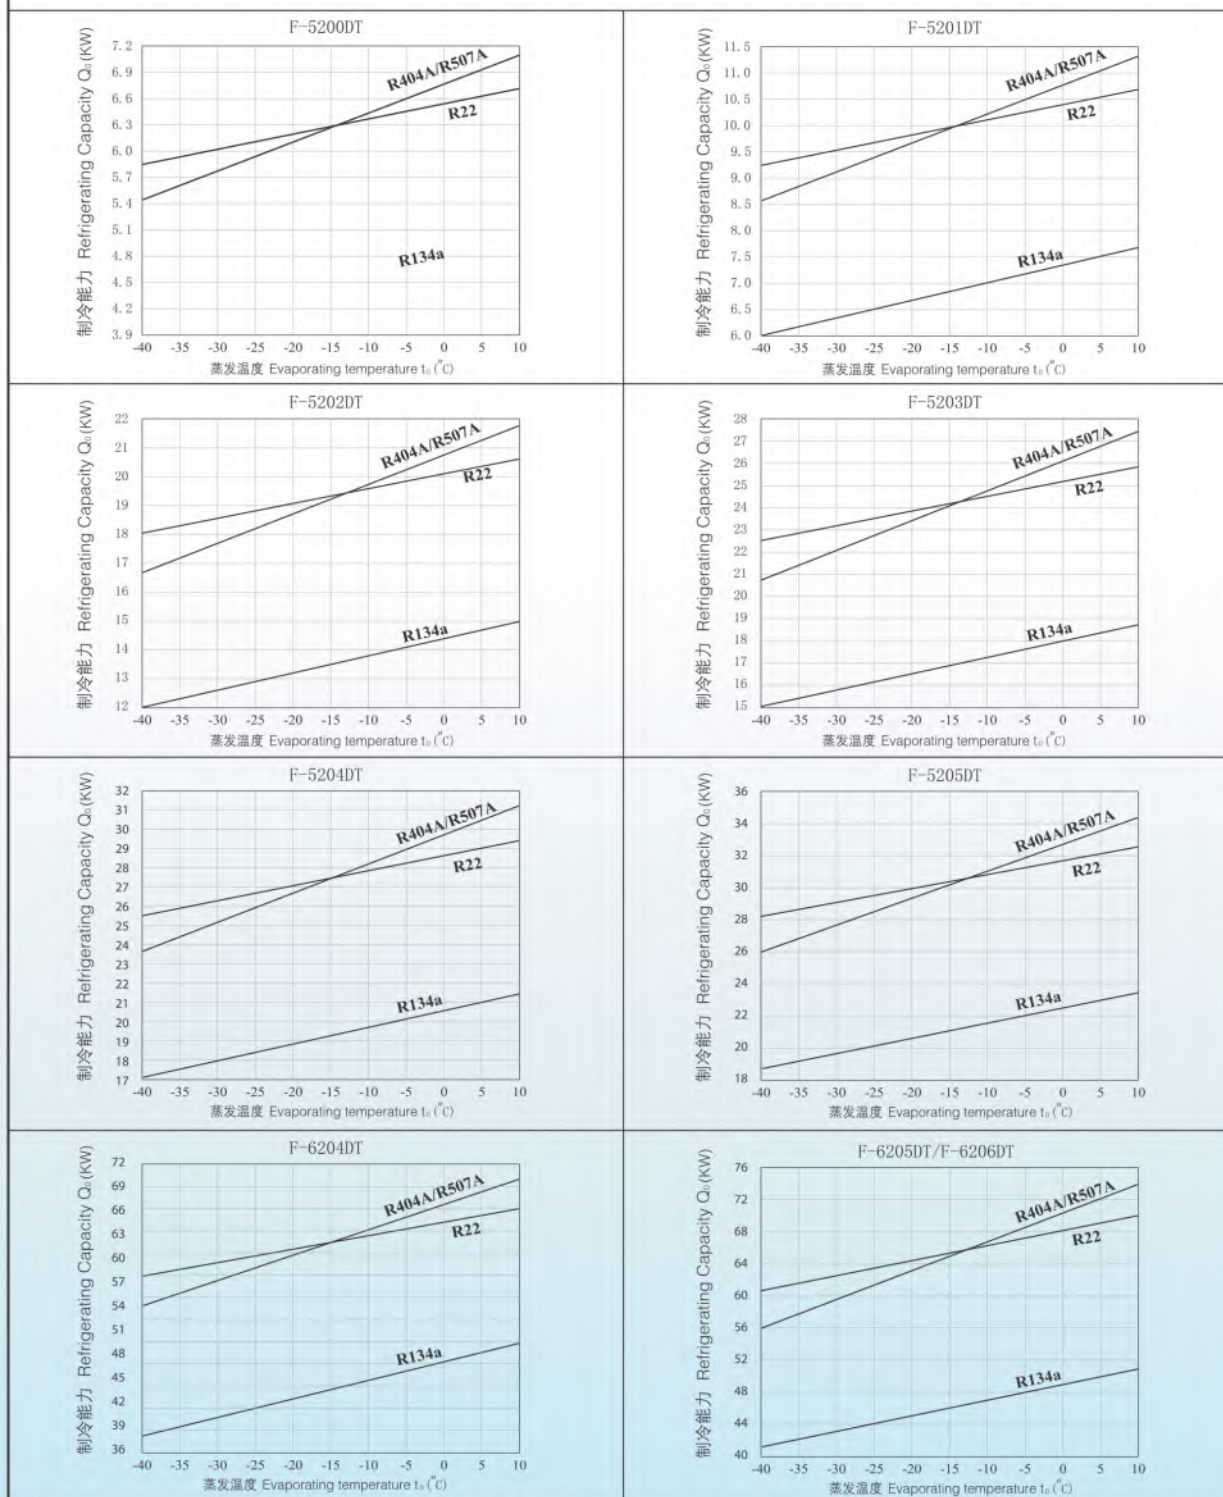

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.




45F-62系列油分离器是为了满足R410A制冷装置对提升运行压力的需求而开发的。

- 最大许可运行压力: 4.5MPa;
- 最高工作温度: 140°C;
- 浮球回油阀最大工作压差: 2.5MPa。

The 45F-62 series oil separator is developed to meet the demand of R410A refrigeration system for increasing working pressure.

- Maximum allowable working pressure(MAWP): 4.5MPa;
- Maximum working temperature: 140°C;
- Maximum working pressure differential of the floating ball oil return valve: 2.5MPa.

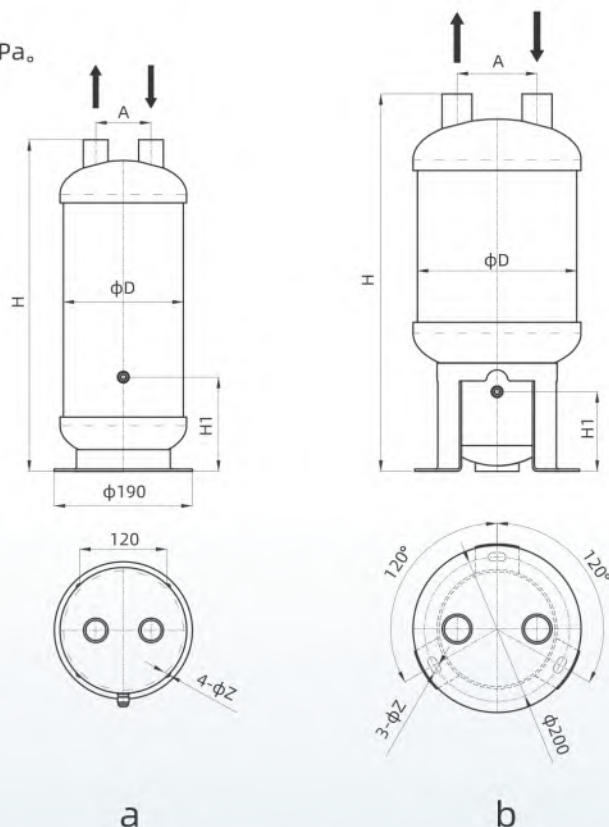


型号 Model	接口尺寸 Joint Size (Inch/mm)	ØD (mm)	H (mm)	H1 (mm)	A (mm)	ØZ (mm)	油出口 Oil Outlet (SAE)	初始注油量 First Oil Charge (l)	容积 Volume (l)	图例 Fig.
45F-6205	5/8"	165	385	125	76	9	3/8"	1.2	6	a
45F-6207	7/8"	165	439	125	76	9	3/8"	1.2	6.9	a
45F-6209	1-1/8"	165	461	125	76	9	3/8"	1.2	7.3	a
45F-6211	1-3/8"	165	496	125	80	9	3/8"	1.2	7.8	a
45F-6211P	1-3/8"	219	521	110	110	12×24	3/8"	0.5	11.6	b
45F-6213	1-5/8"	219	526	110	110	12×24	3/8"	0.5	11.6	b

★ 油分离器第一次安装时, 需要向油分离器内充注与压缩机相同牌号的润滑油, 充注量参照上面表格中给出的“初始注油量”。

★ When installing the oil separator for the first time, fill it with the same brand & model of lubrication oil as the compressor, using the 'First Oil Charge' specified in the table above.


45F-62系列油分离器制冷能力表

45F-62系列油分离器制冷能力表
45F-62 Series Oil Separator Refrigerating Capacity Table

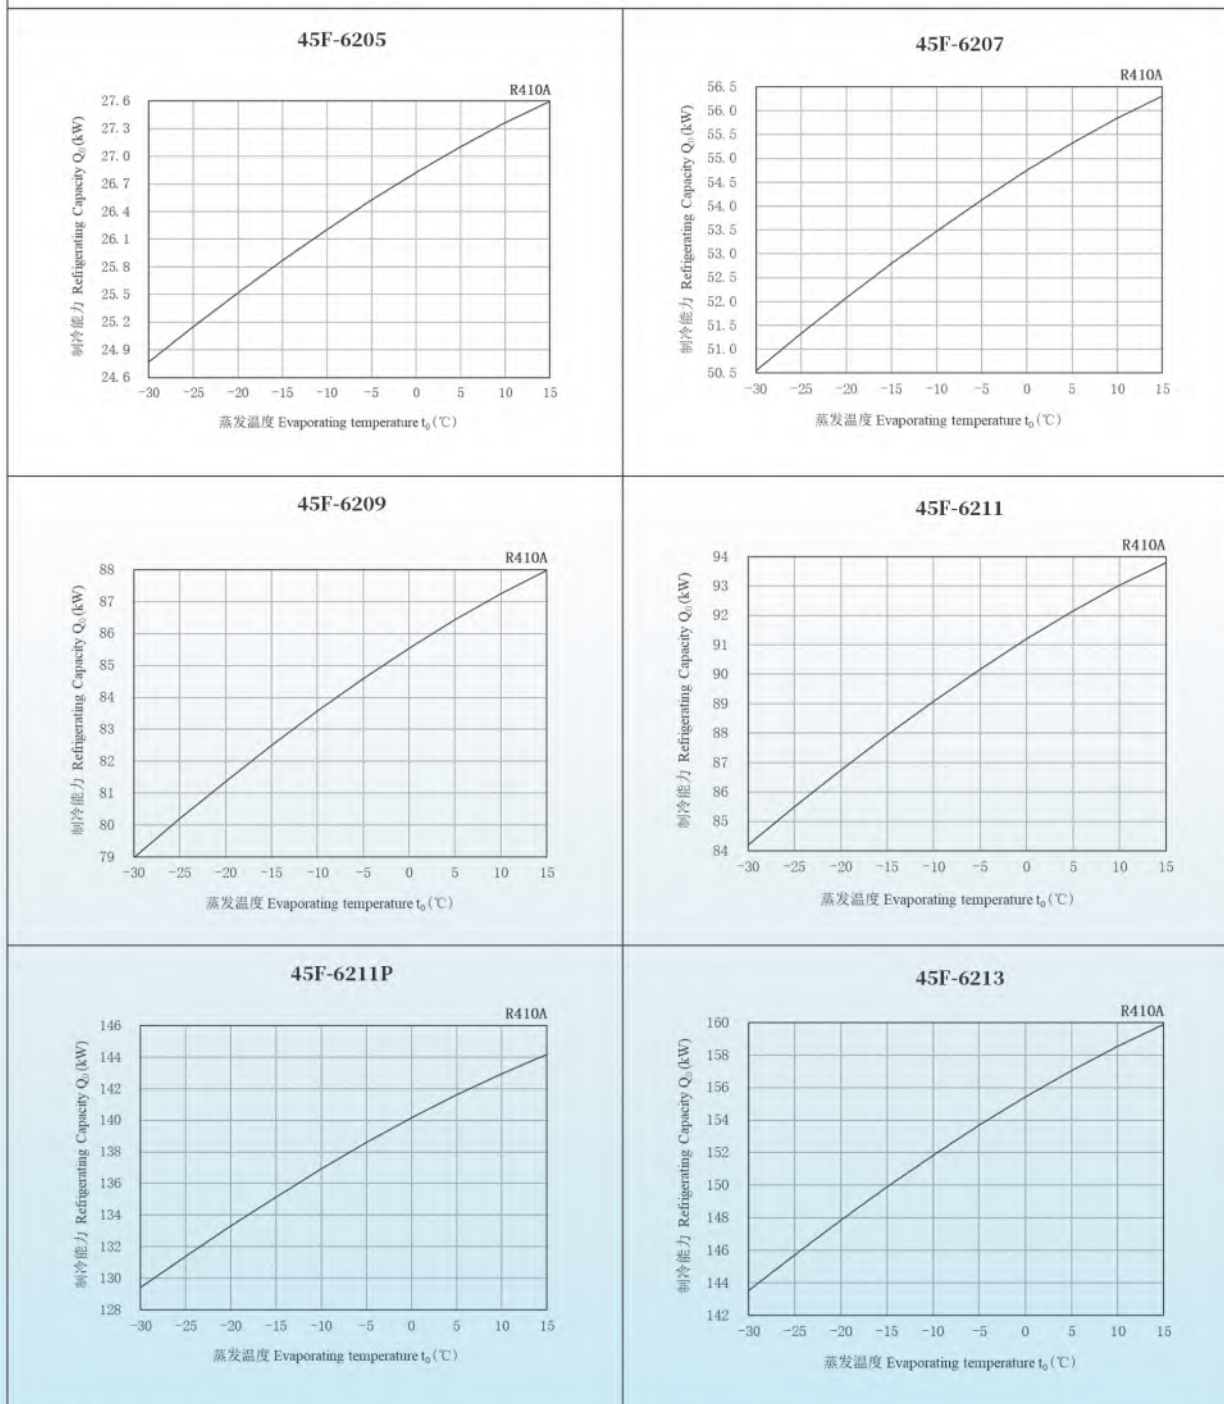

上述数据基于: 冷凝温度+40°C, 排气温度+100°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+100°C.




从压缩机输出的带有悬浮油颗粒的气态制冷剂进入到油分离器中, 气态制冷剂携带的油经过进口金属丝网的拦截, 油颗粒之间相互撞击、聚集形成较重的油颗粒, 这些较重的油颗粒最终撞击在油分离器的内部挡板和筒壁上, 此处具有最终分离作用。被分离出来的油滴落到油分离器的底部, 并通过此处安装的浮球式针阀将油返回到压缩机曲轴箱或储油器中。

- 最大许可运行压力: 3.1 MPa
- 浮球回油阀最大工作压差: 2.5MPa
- 适用制冷剂: R134a,R22,R407C,R404A,R507A
- F-5600N,F-5601N,F-5602N,F-5603C最大许可运行压力: 4.1 MPa, 适用制冷剂: R410A

The refrigerant gas containing oil in aerosol form exported from the compressor enters into the oil separator. The oil contained in the refrigerant gas is intercepted when it passes through the inlet metal web, and then the oil particles collide with one another and form heavier oil particles. The heavier oil particles hit on the inside baffle and shell body of the oil separator where it has final separation effect . Be isolated droplets dropped into the bottom of the oil separator where a float operated needle valve returns the oil back to the crankcase of compressor or back to the oil reservoir.

- Maximum permit working pressure: 3.1 MPa
- Maximum working pressure difference of floating ball oil return valve: 2.5MPa
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A
- Maximum permit working pressure of F-5600N,F-5601N, F-5602N,F-5603C: 4.1MPa, Applicative refrigerants: R410A

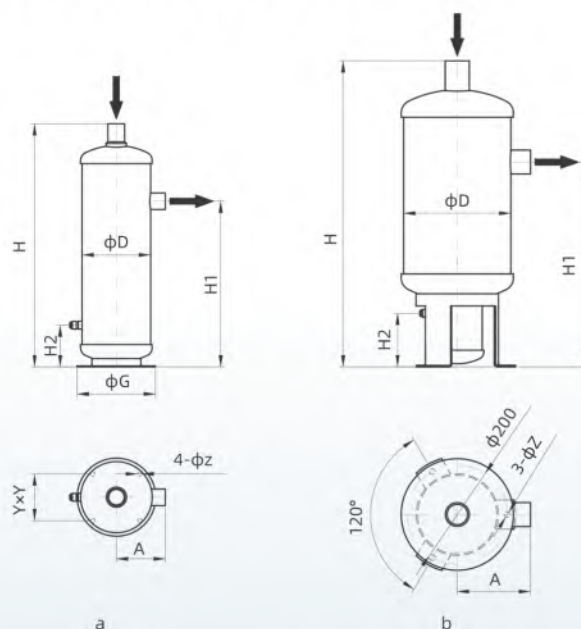


型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	Y (mm)	φG (mm)	φZ (mm)	油出口 Oil Outlet (SAE)	初始注油量 First Oil Charge (l)	容积 Volume (l)	图例 Fig.
F-5600N	3/8"	102	266	174	106	73	86	140	8.5	3/8"	0.5	1.6	a
F-5601N	1/2"	102	267	174	106	75	86	140	8.5	3/8"	0.5	1.6	a
F-5602N	5/8"	102	342	239	106	78	86	140	8.5	3/8"	0.5	2.1	a
F-5603C	7/8"	102	400	279	106	81	86	140	8.5	3/8"	0.5	2.5	a
F-5603	7/8"	140	424	293	106	100	96	160	9.0	3/8"	0.9	5.0	a
F-5604	1-1/8"	140	499	340	106	100	96	160	9.0	3/8"	0.9	6.0	a
F-5604P	1-1/8"	165	548	376	117	113	120	190	9.0	3/8"	1.2	9.0	a
F-5605	1-3/8"	140	499	336	106	103	96	160	9.0	3/8"	0.9	6.0	a
F-5605P	1-3/8"	165	553	376	117	116	120	190	9.0	3/8"	1.2	9.0	a
F-5605B	1-3/8"	219	628	420	110	143	-	-	12	3/8"	0.5	15.0	b
F-5606	1-5/8"	165	558	376	117	123	120	190	9.0	3/8"	1.2	9.0	a
F-5606P	1-5/8"	219	628	420	110	150	-	-	12	3/8"	0.5	15.0	b
F-5607	2-1/8"	165	558	370	117	128	120	190	9.0	3/8"	1.2	9.0	a
F-5607P	2-1/8"	219	628	420	110	155	-	-	12	3/8"	0.5	15.0	b

- ★ 油分离器第一次安装时, 需要向油分离器内充注与压缩机相同牌号的润滑油, 充注量参照上面表格中给出的“初始注油量”。
- ★ When you use the oil separator for the first time, please fill the lubricating oil with the same trademark as it is in the compressor into the oil separator, and the oil charging volume please take the numbers marked in the above form as your reference.

F-56 Series Oil Separator Refrigerating Capacity Table F-56系列油分离器制冷能力表





F-56系列油分离器制冷能力表
F-56 Series Oil Separator Refrigerating Capacity Table
(表一)

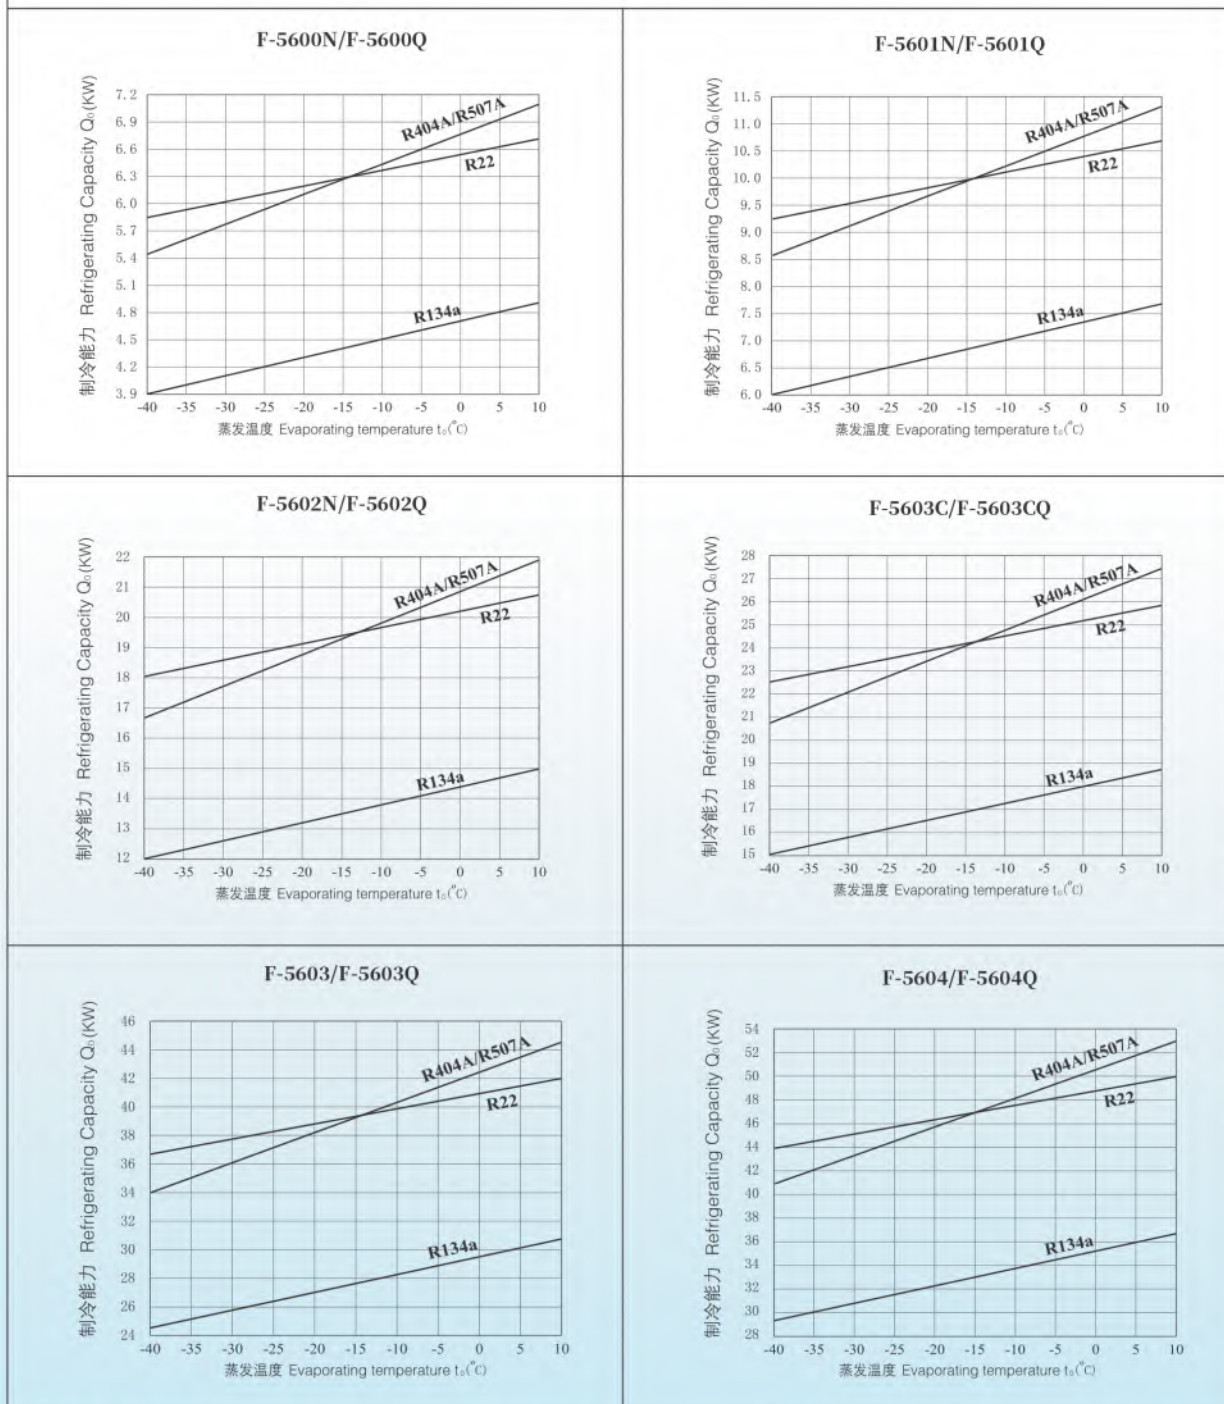

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。


Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

F-56系列油分离器制冷能力表 F-56 Series Oil Separator Refrigerating Capacity Table (表二)

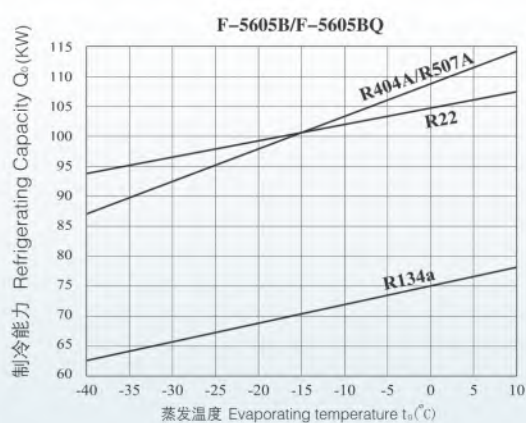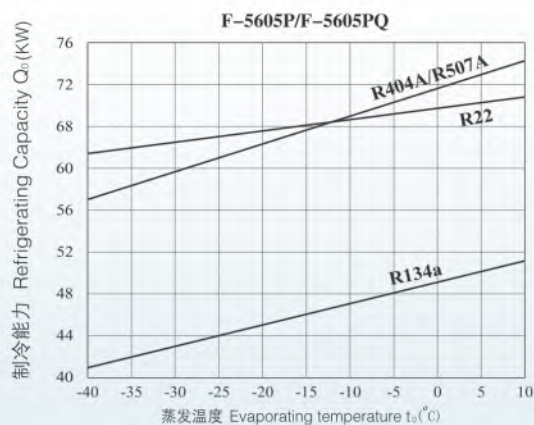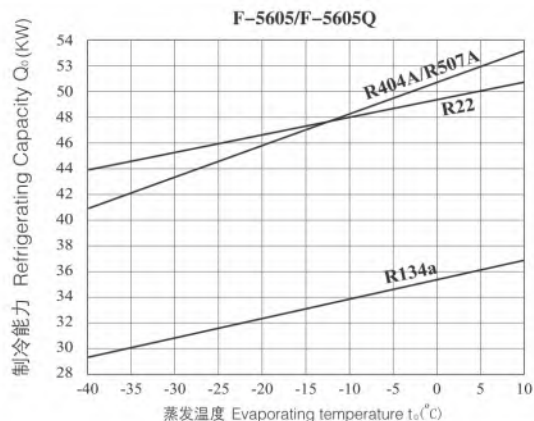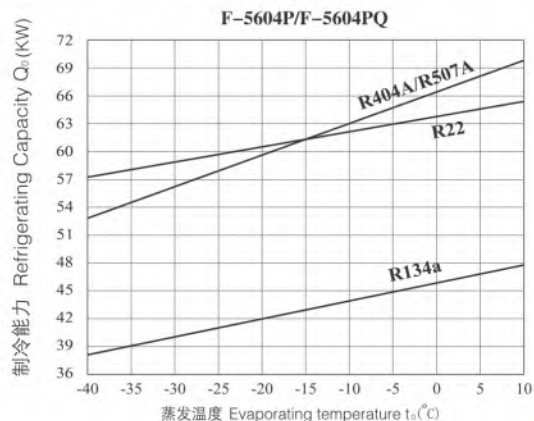


上述数据基于: 冷凝温度+40°C, 排气温度+80°C。
Based on the above date:condensing temperature+40°C,exhaust temperature+80°C.

F-56系列油分离器制冷能力表
F-56 Series Oil Separator Refrigerating Capacity Table
(表三)

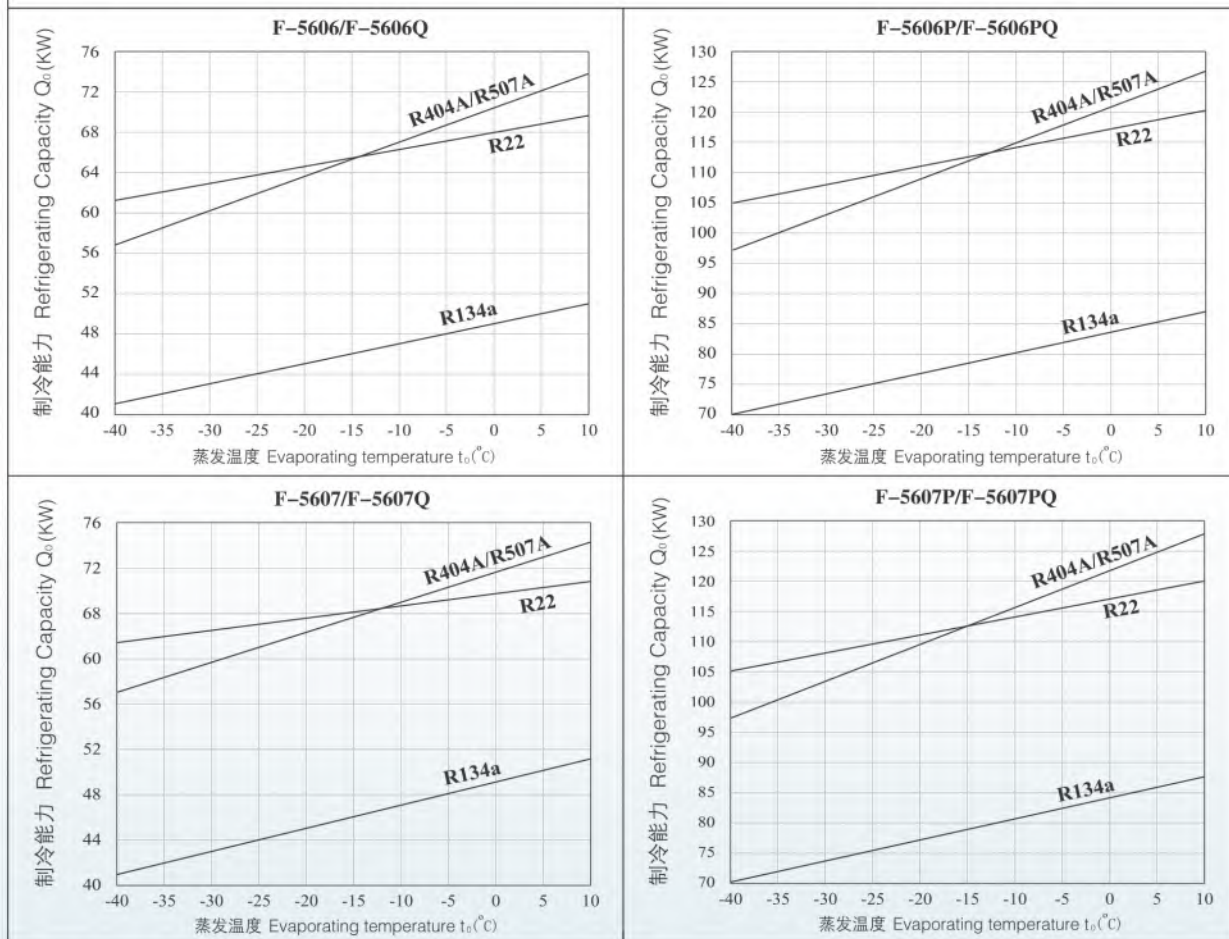

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.



F-66SG系列螺旋式油分离器以其离心式分离的特点, 可在引起最小压降的情形下达到非常好的分油效果。

油分离器内部安装了一个用不锈钢丝编织成的除雾器。从而形成了一道捕获雾状油的屏障。这道屏障使雾状油变得紊乱, 从而使得它们彼此相互碰撞、聚集, 并且吸附在除雾器上变成油滴, 最后靠重力作用到达油分离器底部的油收集区。

油分离器底部有一个法兰, 可以非常方便的清洗进入油分离器的脏物。法兰上装有一块永磁铁, 它可以吸附进入油分离器中的铁屑。


- 最大许可运行压力: 3.1 MPa;
- 浮球回油阀最大工作压差: 2.5MPa;
- 适用制冷剂: R134a,R22,R407C,R404A,R507A。

F-66SG series helical oil separator features a centrifugal flow path achieving very good oil separation effect with lowest pressure drop.

Inside of the oil separator there is a demister which is knitted by stainless steel wire. So it engender a barrier to capture the oil in fog form. This barrier make the oil in fog form chaotic and they collide and get together with each other, and then they will be adsorbed by the demister and final become oil drop. The oil drop will fall into the oil collection area at the bottom of the oil separator by gravity action.

It has a flange on the bottom, so it is quite convenient to clean the dirty impurities inside of it, and there is a piece of permanent magnet with which can adsorb the scrap iron entered into the oil separator.

- Maximum permit working pressure: 3.1 MPa;
- Maximum working pressure difference of floating ball oil return valve: 2.5MPa;
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A.






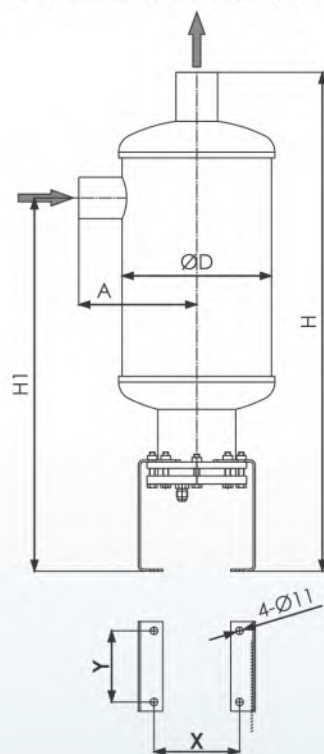


型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	A (mm)	X (mm)	Y (mm)	油出口 Oil Outlet (SAE)	初始注油量 First Oil Charge (l)	容积 Volume (l)
F-6609SG	1-1/8"	165	611	471	123	126	105	3/8"	0.5	6.0
F-6611SG	1-3/8"	165	641	492	128	126	105	3/8"	0.5	6.5
F-6613SG	1-5/8"	165	673	515	138	126	105	3/8"	0.5	7.0
F-6617SG	2-1/8"	219	735	540	173	126	105	3/8"	0.5	14.0
F-6621SG	2-5/8"	219	779	575	190	126	105	3/8"	0.5	15.5
F-6625SG	3"	273	795	553	227	194	105	3/8"	0.5	23.0

★ 油分离器第一次安装时, 需要向油分离器内充注与压缩机相同牌号的润滑油, 充注量参照上面表格中给出的“初始注油量”。


★ When you use the oil separator for the first time, please fill the lubricating oil with the same trademark as it is in the compressor into the oil separator, and the oil charging volume please take the numbers marked in the above form as your reference.

F-66SG系列油分离器制冷能力
The refrigerating capacity of F-66SG series oil separator.

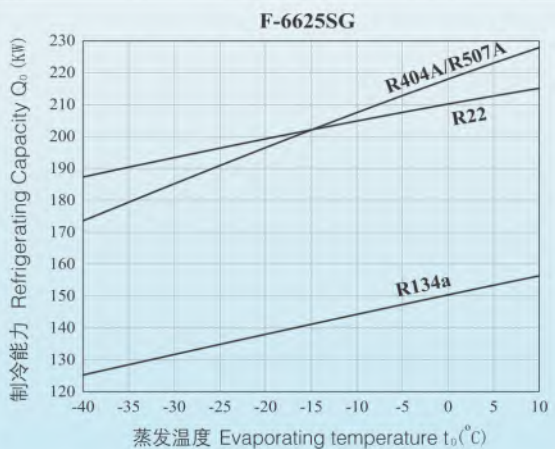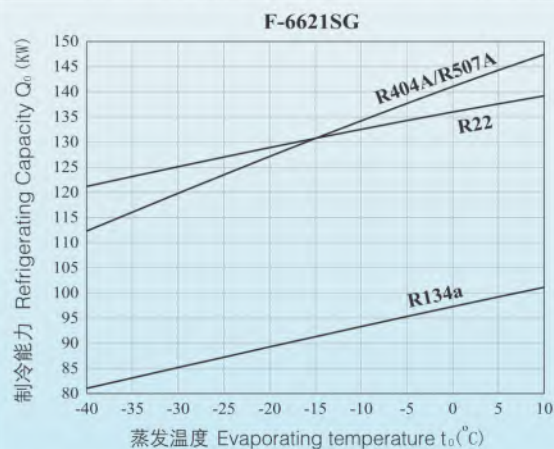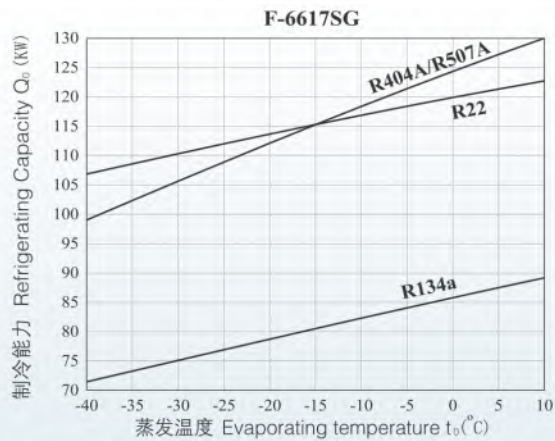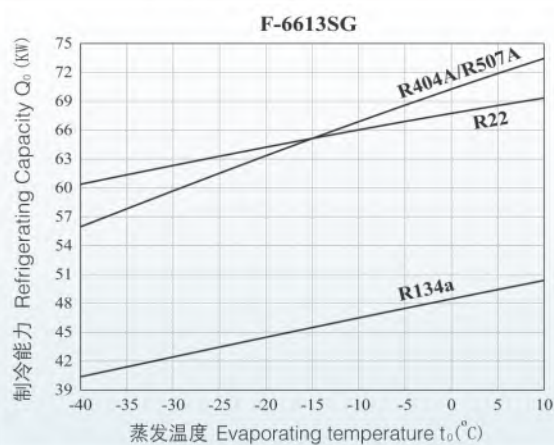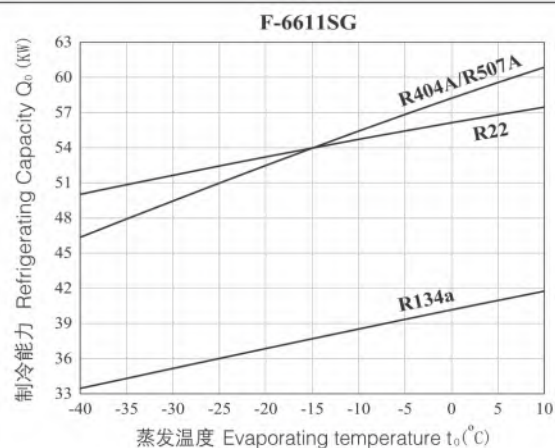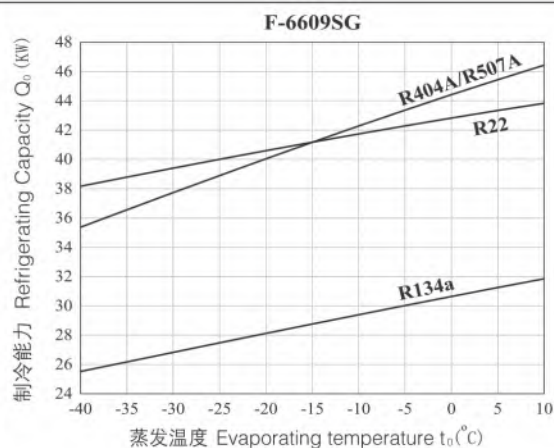

上述数据基于：冷凝温度+40°C，排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.




F-66系列油分离器以其离心式分离的特点,可在引起最小压降的情形下达到非常好的分油效果。被压缩机排出的带有悬浮油颗粒的制冷剂蒸汽进入到油分离器中,带有悬浮油颗粒的制冷剂蒸汽与螺旋式导流板相接触,并且沿导流板旋转流动。油颗粒在离心力的作用下,被分离到螺旋式导流板的边缘处和油分离器的桶壁上,在这里被分离出来的油颗粒聚集成较大的油滴流入油分离器底部的油收集区。

- 最大许可运行压力: 3.1MPa
- 浮球回油阀最大工作压差: 2.5MPa
- 适用制冷剂: R134a,R22,R407C,R404A,R507A
- F-6604,F-6605,F-6607最大许可运行压力: 4.1MPa, 适用制冷剂: R410A


F-66 series oil separator, with its centrifugal separation characteristics, can achieve a very good oil separation effect with the minimum pressure drop. When the refrigeration compressor operating, the refrigerant vapor with the suspending fog particles of lubricating oil discharged into the oil separator, the refrigerant vapor contacts the spiral guide plate and flows along the guide plate. Under the action of centrifugal force, the oil particles are separated at the edge of the spiral guide plate and the inner wall of the oil separator, where the separated oil particles gather into larger oil droplets and flow into the oil collection area at the bottom of the oil separator.

- Maximum permit working pressure: 3.1MPa
- Maximum working pressure difference of floating ball oil return valve: 2.5MPa
- Applicative refrigerants: R134a,R22,R407C,R404A,R507A
- F-6604,F-6605,F-6607Maximum permit working pressure: 4.1MPa, Applicative refrigerants: R410A

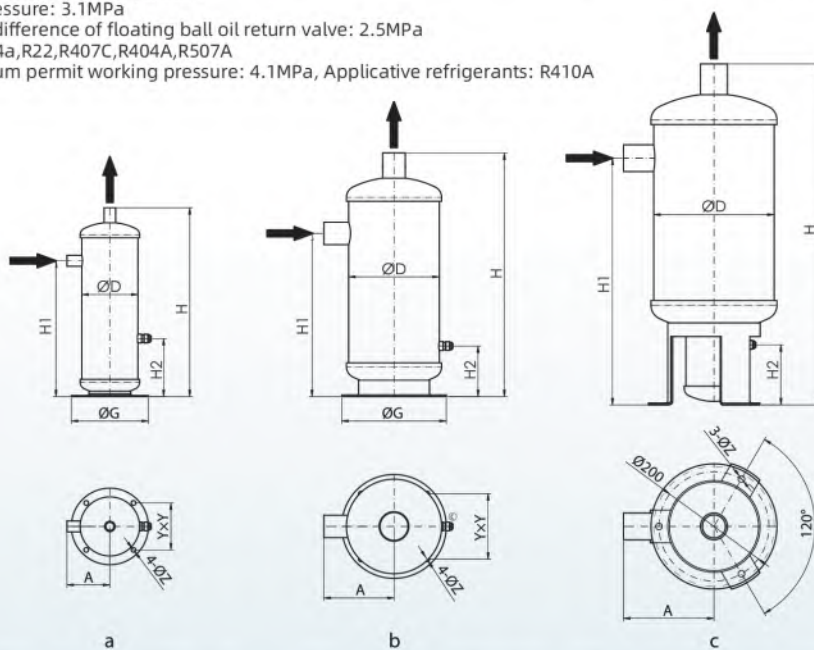

型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	Y (mm)	φG (mm)	φZ (mm)	油出口 Oil Outlet (SAE)	初始注油量 First Oil Charge (l)	容积 Volume (l)	图例 Fig.
F-6604	1/2"	102	344	249	106	75	86	140	9.0	3/8"	0.5	2.2	a
F-6605	5/8"	102	346	249	106	78	86	140	9.0	3/8"	0.5	2.2	a
F-6607	7/8"	102	399	290	106	81	86	140	9.0	3/8"	0.5	2.5	a
F-6609	1-1/8"	165	446	299	117	128	120	190	9.0	3/8"	1.2	7.0	b
F-6609P	1-1/8"	219	614	451	110	155	-	-	12	3/8"	0.5	15.0	c
F-6611	1-3/8"	165	446	299	117	128	120	190	9.0	3/8"	1.2	7.0	b
F-6611P	1-3/8"	219	614	451	110	155	-	-	12	3/8"	0.5	15.0	c
F-6613	1-5/8"	165	456	299	117	138	120	190	9.0	3/8"	1.2	7.0	b
F-6613P	1-5/8"	219	624	451	110	165	-	-	12	3/8"	0.5	15.0	c
F-6617	2-1/8"	165	523	350	117	145	120	190	9.0	3/8"	1.2	8.2	b
F-6617P	2-1/8"	219	639	444	110	172	-	-	12	3/8"	0.5	15.0	c

F-66Q Series Oil-stored Type Oil Separator F-66Q系列储油式油分离器



F-66Q系列储油式油分离器以其离心式分离的特点, 可在引起最小压降的情形下达到非常好的分油效果。


F-66Q系列储油式油分离器是针对安装电子油位控制器的并联式压缩机机组设计的。它可以将分离出来的润滑油储存在下部的储油段内。依靠油分离器和压缩机曲轴箱之间的压力差, 通过电子油位控制器将润滑油直接输送到每一台压缩机曲轴箱。

- 最大许可运行压力: 3.1MPa
- 适用制冷剂: R134a,R22,R407C,R404A,R507A
- F-6604Q,F-6605Q,F-6607Q最大许可运行压力: 4.1MPa, 适用制冷剂: R410A

F-66Q series oil separator with Oil-storage, with its centrifugal separation characteristics, can achieve a very good oil separation effect under the minimum pressure drop.







F-66Q series oil separator with Oil-storage is designed for a parallel compressor rack equipped with electronic oil level controllers. It can store the separated lubricating oil at the bottom in the oil storage section. Relying on the pressure difference between the oil separator and the compressor crankcase, the lubricating oil is delivered directly to each compressor crankcase through the electronic oil level controller.

- Maximum permit working pressure: 3.1MPa
- Applicative refrigerants: R134a,R22,R407C,R404A,R507A
- Maximum permit working pressure of F-6604Q,F-6605Q,F-6607Q: 4.1MPa, Applicative refrigerants: R410A

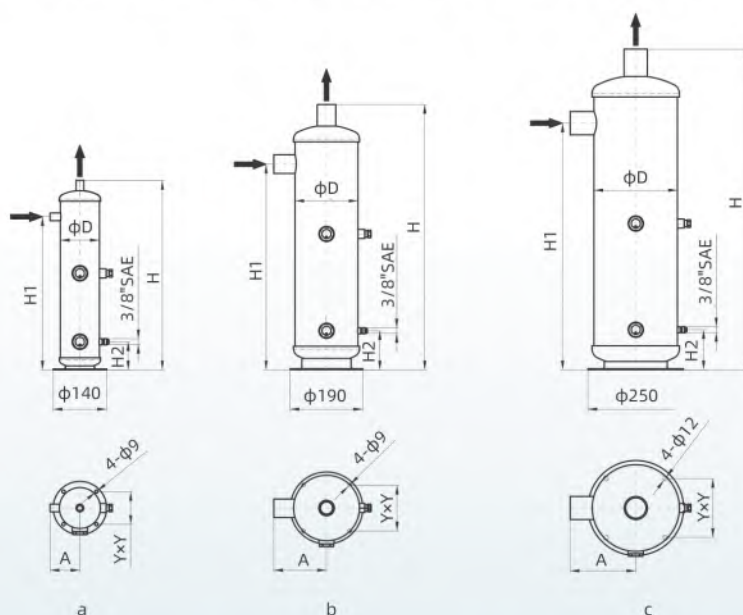






型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	Y (mm)	油出口 Oil Outlet (SAE)	油容积 Oil Volume (l)	总容积 Total Volume (l)	图例 Fig.
F-6604Q/3	1/2"	102	496	403	74	75	86	3/8"	1.7	3.3	a
F-6605Q/3	5/8"	102	499	403	74	78	86	3/8"	1.7	3.3	a
F-6607Q/3	7/8"	102	550	440	74	81	86	3/8"	1.7	3.6	a
F-6609Q/3	1-1/8"	165	689	542	103	128	120	3/8"	6.4	11.7	b
F-6609QP	1-1/8"	219	820	657	110	155	155	3/8"	12.6	25.6	C
F-6611Q/3	1-3/8"	165	689	542	103	128	120	3/8"	6.4	11.7	b
F-6611QP	1-3/8"	219	820	657	110	155	155	3/8"	12.6	25.6	C
F-6613Q/3	1-5/8"	165	699	542	103	138	120	3/8"	6.4	11.7	b
F-6613QP	1-5/8"	219	830	657	110	165	155	3/8"	12.6	25.6	C
F-6617Q/3	2-1/8"	165	765	592	103	145	120	3/8"	6.4	13.0	b
F-6617QP	2-1/8"	219	845	650	110	172	155	3/8"	12.6	25.6	C

F-66 & F-66Q系列油分离器制冷能力
The refrigerating capacity of F-66 & F-66Q series oil separator.
(表一)

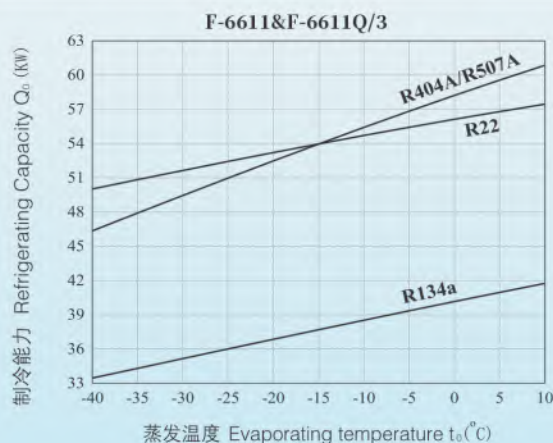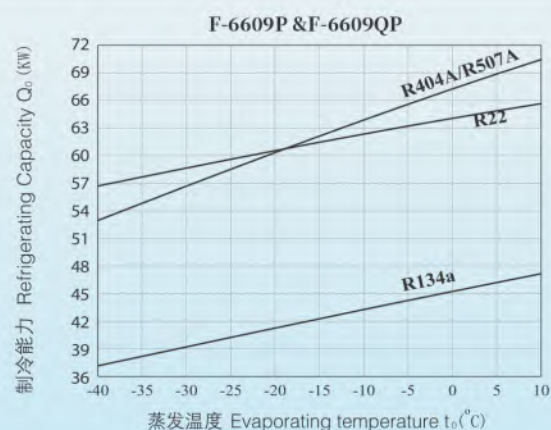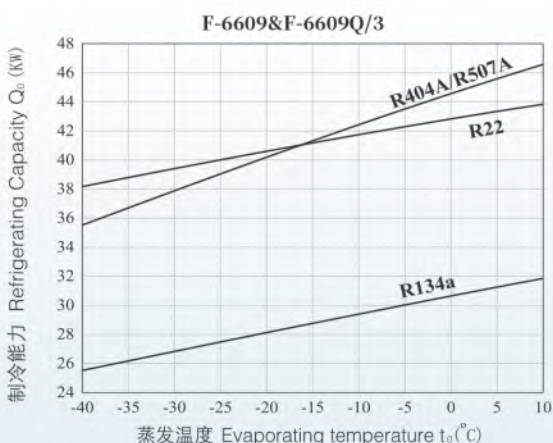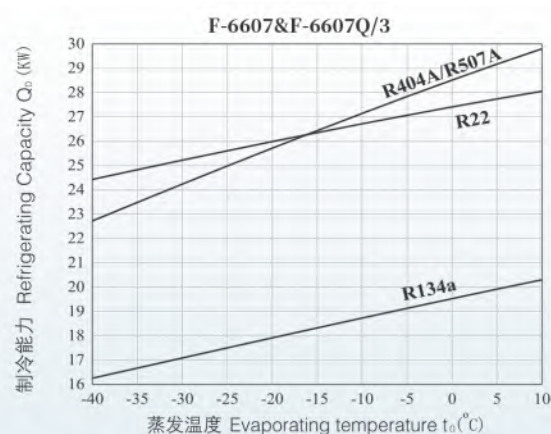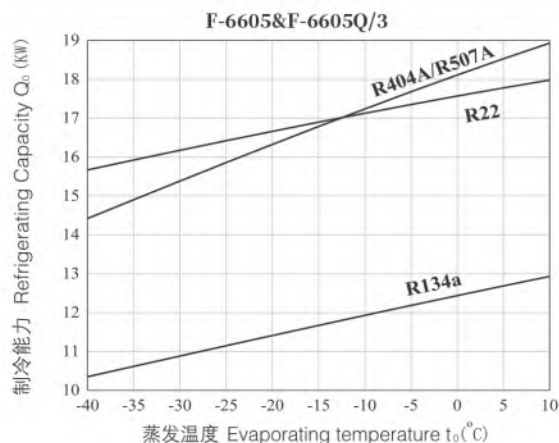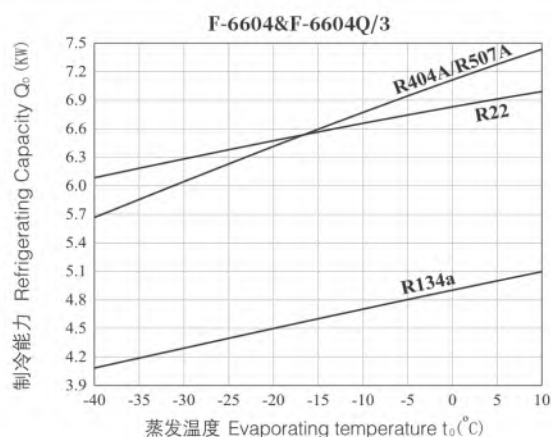


上述数据基于: 冷凝温度+40°C, 排气温度+80°C。
Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

F-66 & F-66Q系列油分离器制冷能力
 The refrigerating capacity of F-66 & F-66Q series oil separator.
 (表二)

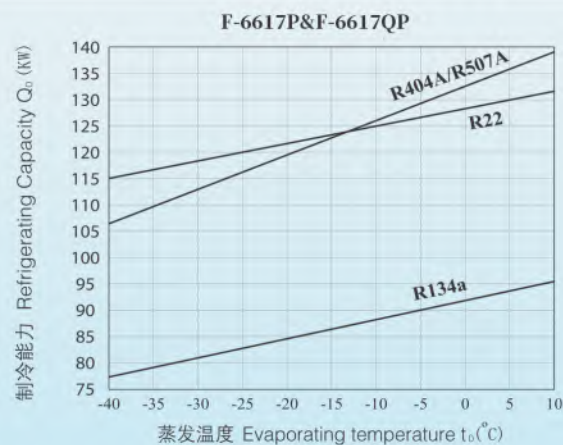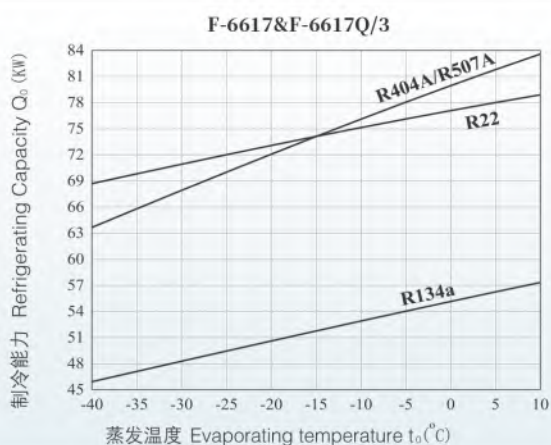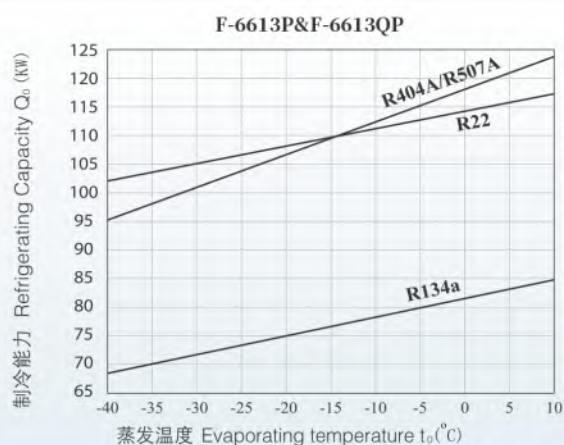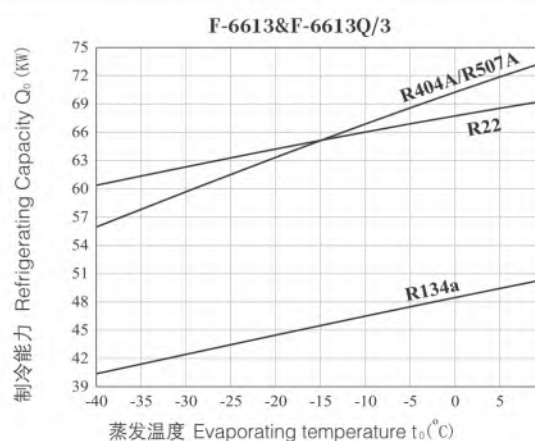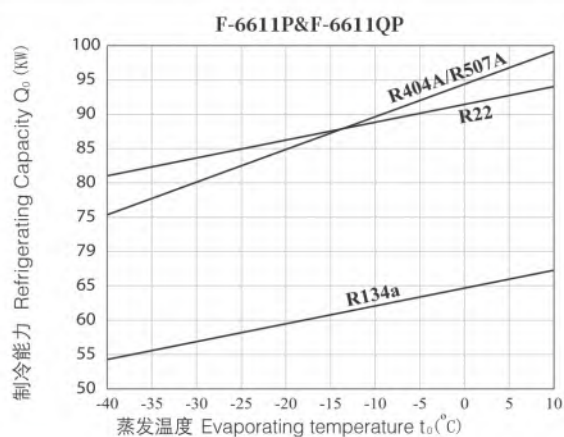

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.




F-79系列油分离器是一款通过特殊设计的油气分离滤芯构建出了一道油分子“捕获”矩阵。这道“捕获”矩阵使油分子变得及其活跃，从而使得它们彼此相互碰撞形成油滴，油滴聚集在一起构造成更大的油滴，大颗粒的油滴在重力作用到达油分离器底部。这种设备，通过捕获小颗粒油滴及大部分油蒸气来达到高效分离。

- 最大许可运行压力: 3.1 MPa;
- 浮球回油阀最大工作压差: 2.5MPa;
- 当油分离器进出口压差大于0.1MPa (1bar) 时应及时更换油气分离器滤芯;
- 适用制冷剂: R134a,R22,R407C,R404A,R507A;

F-79 series oil separator employs a specially engineered oil-gas separation filter core that creates a oil molecular "capturing" matrix. This "capturing" matrix activates oil molecules, causing them to collide and coalesce into oil droplets. As these droplets aggregate into larger particles, gravity carries them to the separator's bottom. By trapping both fine oil droplets and most of the oil vapor, the system achieves highly efficient oil separation.

- Maximum allowable working pressure (MAWP): 3.1 MPa;
- Maximum working pressure differential of the floating ball oil return valve: 2.5MPa;
- Replace the oil-gas separator filter element promptly when the pressure differential between inlet and outlet exceeds 0.1MPa (1 bar).
- Applicable refrigerants: R134a, R22, R407C, R404A, R507A;

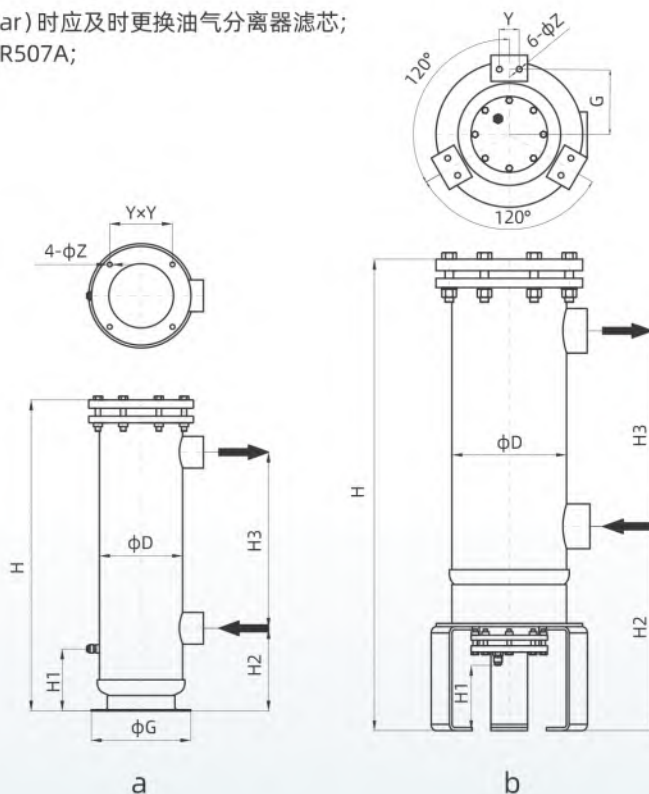


型号 Model	接口尺寸 Joint Size (Inch/mm)	ØD (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	A (mm)	Y (mm)	G (mm)	ØZ (mm)	油出口 Oil Outlet (SAE)	初始 注油量 First Oil Charge (l)	容积 Volume (l)	图例 Fig.
F-7905	5/8"	114	371	105	124	185	76	86	140	9	3/8"	0.6	3.1	a
F-7907	7/8"	114	383	105	128	189	86	86	140	9	3/8"	0.6	3.2	a
F-7909	1-1/8"	114	392	105	131	192	86	86	140	9	3/8"	0.6	3.3	a
F-7911	1-3/8"	140	488	106	135	265	100	96	160	9	3/8"	0.9	6.4	a
F-7913	1-5/8"	140	500	106	139	269	107	96	160	9	3/8"	0.9	6.6	a
F-7917	2-1/8"	159	598	120	159	339	120	120	190	9	3/8"	1.2	9.9	a
F-7921	2-5/8"	219	891	126	393	371	158	38	125	11	3/8"	0.5	21.0	b
F-7925	3"	219	906	126	393	583	158	38	125	11	3/8"	0.5	21.5	b

★ 油分离器第一次安装时，需要向油分离器内充注与压缩机相同牌号的润滑油，充注量参照上面表格中给出的“初始注油量”。

★ When installing the oil separator for the first time, fill it with the same brand & model of lubrication oil as the compressor, using the 'First Oil Charge' specified in the table above.

F-79系列油分离器制冷能力表

F-79系列油分离器制冷能力表
F-79 Series Oil Separator Refrigerating Capacity Table

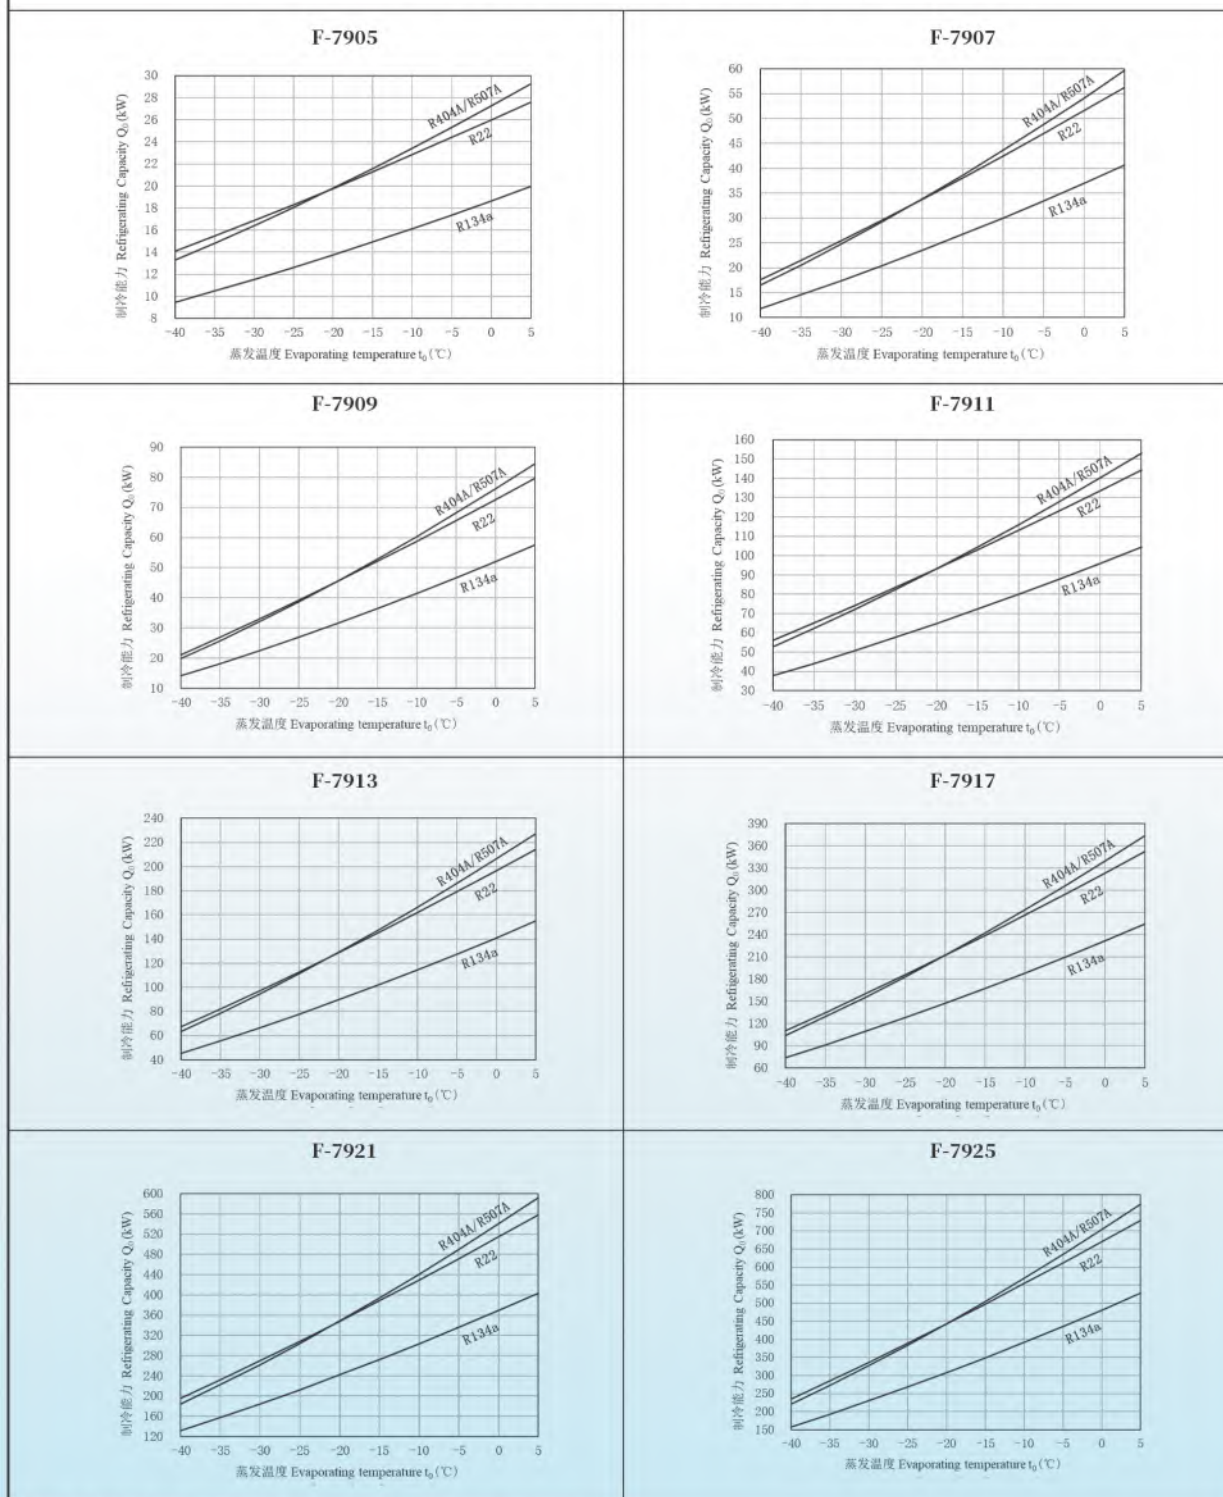

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

F-86Q系列储油式油分离器以其离心式分离的特点,可在引起最小压降的情形下达到非常好的分油效果。

F-86Q系列储油式油分离器用于高压回油的并联式压缩机组。它可以将分离出来的润滑油储存在下部的储油段内。依靠油分离器和压缩机曲轴箱之间的压力差,通过油位控制系统将润滑油输送到每一台压缩机。

油分离器下部有一个储油段,储油段上有一个高位视油镜和一个低位视油镜,标准油位应该在高位视油镜的1/2以下和低位视油镜1/2以上的区间内。新升级产品增设3/8"-18NPT注油口,方便充注润滑油。

- 设计压力: 2.9 MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。


F-86Q Series Oil-stored type Oil Separator features a centrifugal flow path achieving very good oil separation effect with lowest pressure drop.

F-86Q Series Oil-stored type Oil Separator is specially designed for the parallel compressor unit who with the high pressure oil return. It can store the separated lubricant in the oil-stored area at the bottom. Depend on the pressure difference between the oil separator and the crankcase of the compressor, and with the work of the electronic oil level regulator it can directly transport the lubricant to each crankcase of the compressor.

There is an oil-stored area at the bottom of the oil separator. And at this oil-stored area, there are a high-level oil sight glass and a low-level oil sight glass. The standard oil level shall be lower than 1/2 position of the high-level oil sight glass and higher than 1/2 position of the low-level oil sight glass.


New upgraded products add 3/8"-18NPT oil injection port to facilitate the filling of lubricants.

- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

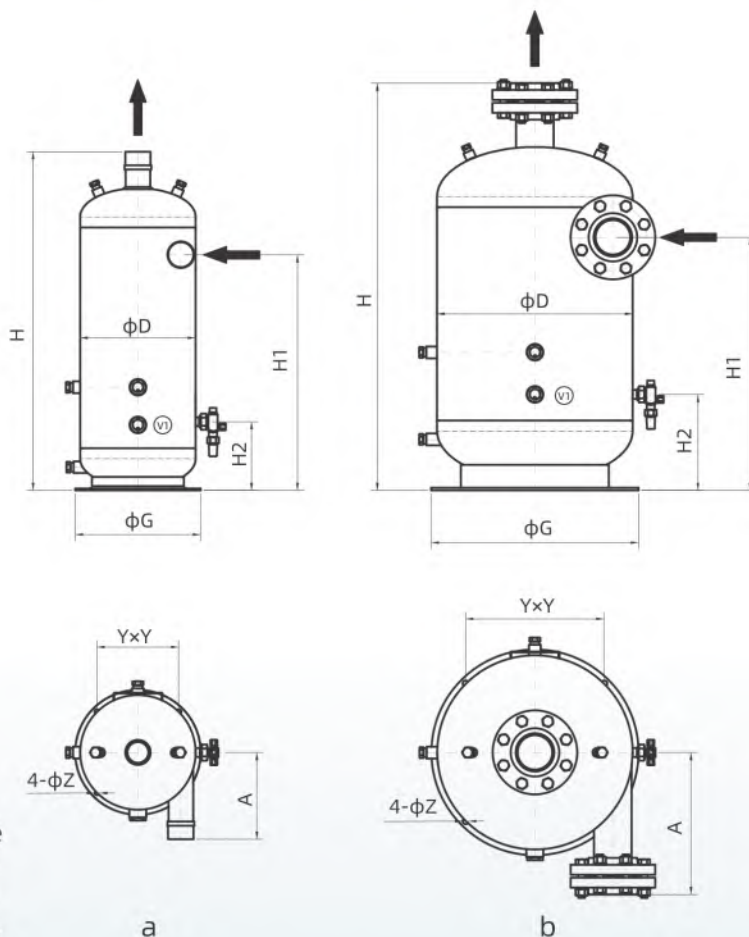


型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	Y (mm)	G (mm)	φZ (mm)	油出口 Oil Outlet (SAE)	V1 油容积 Oil Volume (l)	总容积 Total Volume (l)	图例 Fig.
F-8613QA	1-5/8"	219	732	510	148	191	155	250	12	3/8"	4.3	20	a
F-8617QA	2-1/8"	273	805	560	163	206	193	296	13	3/8"	6.4	36	a
F-8621QA	2-5/8"	325	947	652	183	258	230	350	13	1/2"	10.4	59	a
F-8625QA	3-1/8"	377	991	672	213	280	267	410	13	1/2"	14.9	79	a
F-86065QA	DN65	412	968	620	207	322	290	440	14	5/8"	19.0	91	b
F-86080QA	DN80	462	983	602	228	358	327	490	14	5/8"	25.7	113	b
F-86100QA	DN100	512	1065	641	231	397	360	540	18	7/8"	33.0	152	b
F-86125QA	DN125	616	1175	704	261	447	436	650	18	7/8"	52.7	240	b





活塞并联机组
Piston parallel unit

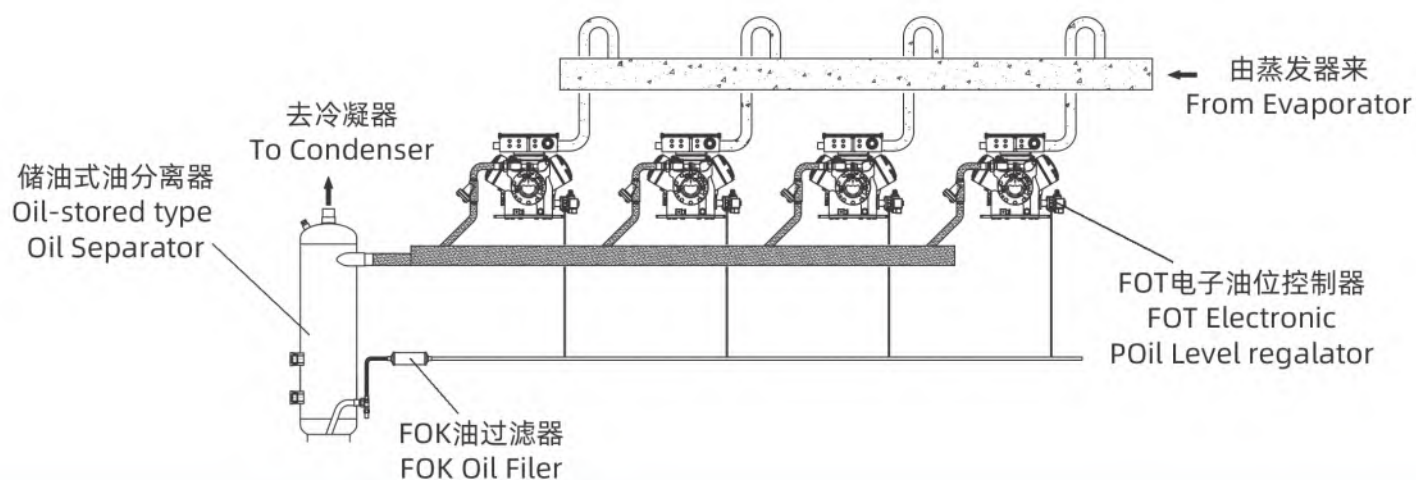

空调螺杆并联机组
Air conditioning screw compressor parallel unit

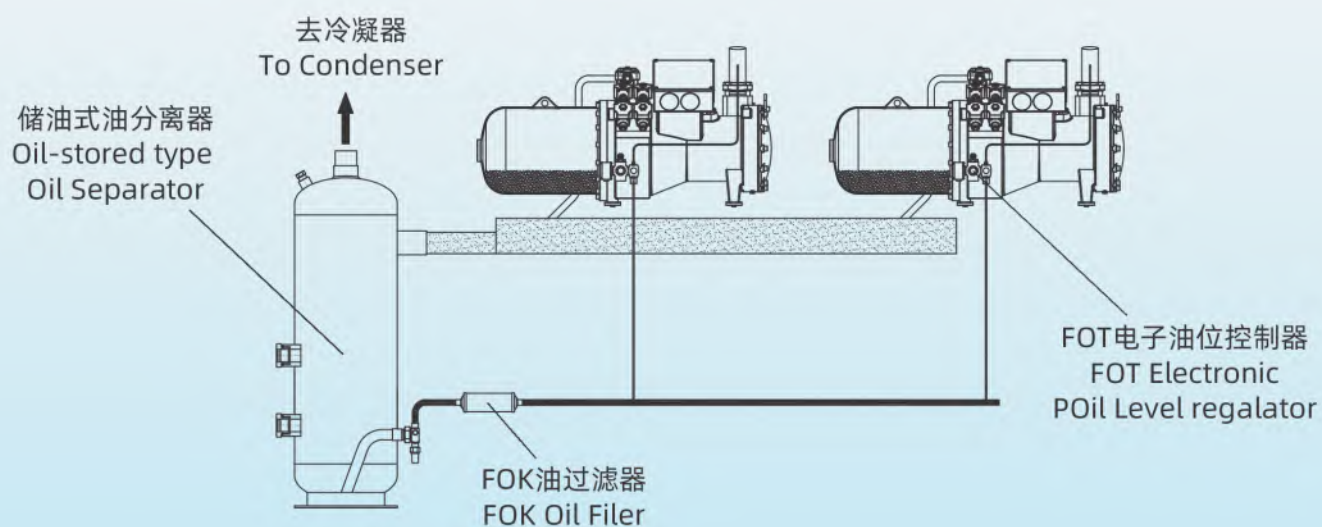





F-86Q系列储油式油分离器制冷能力
The refrigerating capacity of F-86Q series oil separator with oil storage.
(表一)

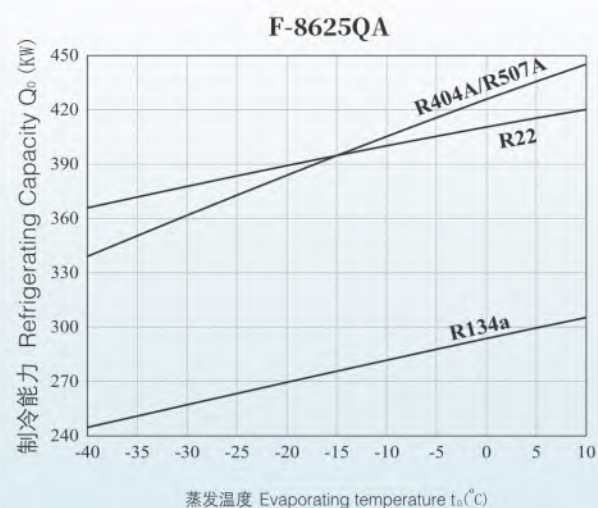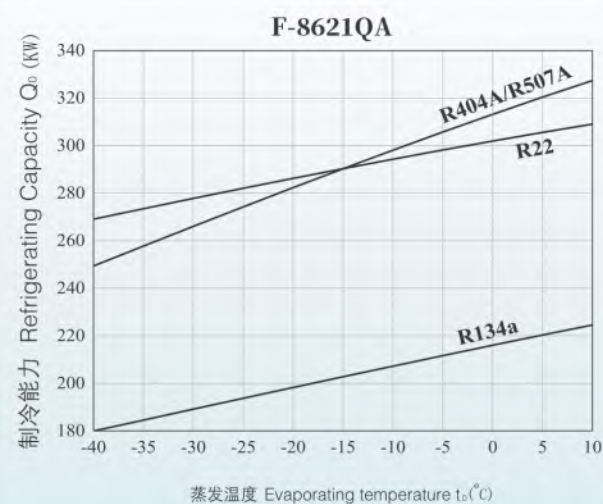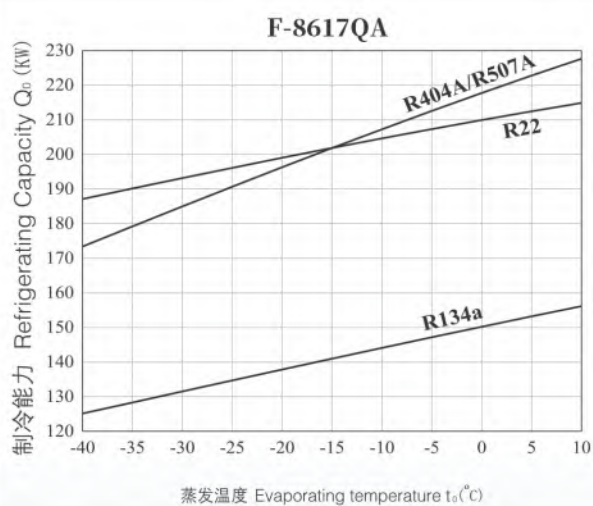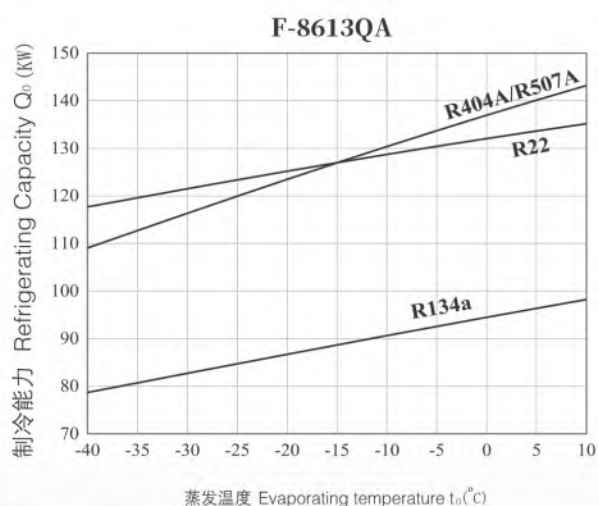

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

F-86Q系列储油式油分离器制冷能力
 The refrigerating capacity of F-86Q series oil separator with oil storage.
 (表二)

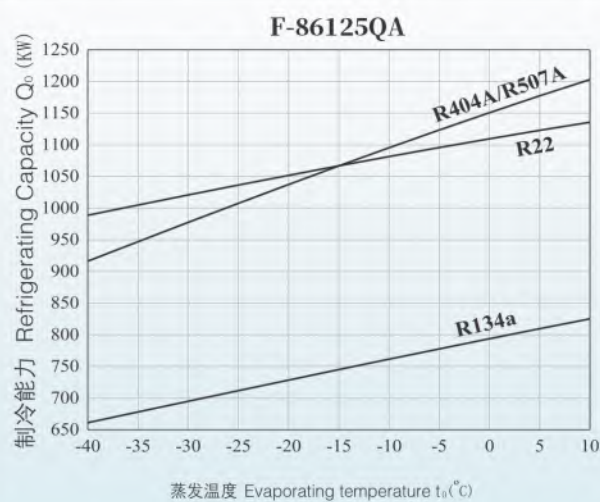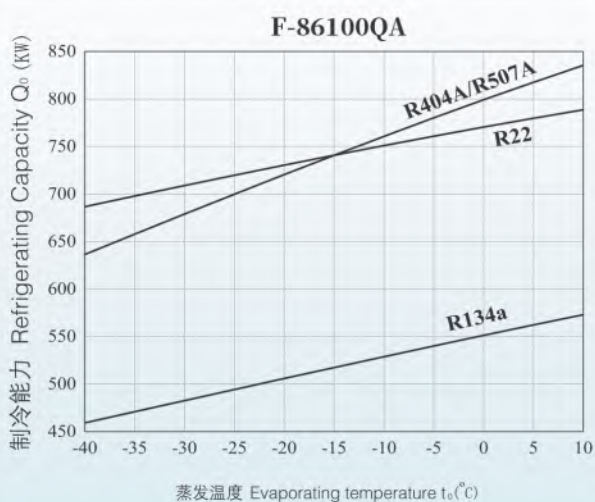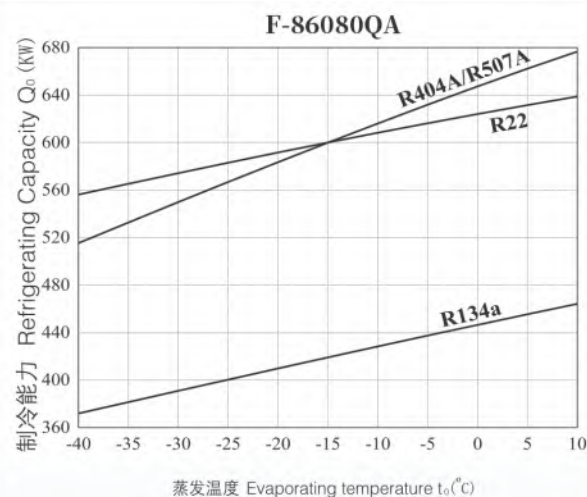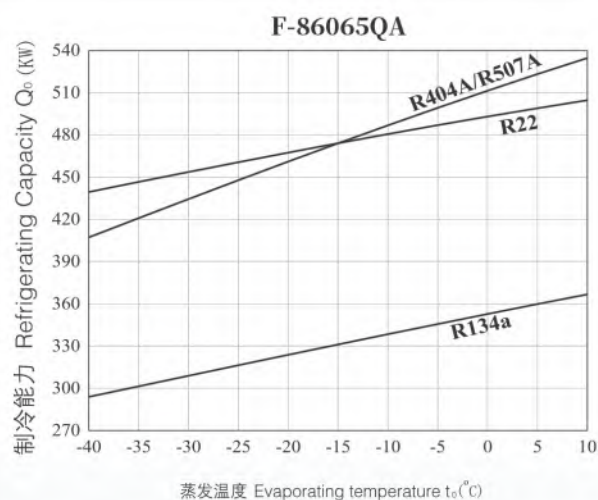

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。


Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

E-86Q系列储油式油分离器适用于以排气压力回油的并联制冷压缩机组。它可以将分离出来的润滑油储存在下部的储油段内。依靠油分离器和压缩机低压侧之间的压差，通过油位控制系统将润滑油输送到每一台压缩机。

- E-86065QA设计压力: 2.9MPa (表压);
- E-86080QA设计压力: 2.9MPa (表压);
- E-86100QA设计压力: 2.9MPa (表压);
- E-86125QA设计压力: 2.5MPa (表压);
- 适用制冷剂: R134a,R22,R407C,R404A,R507A。

E-86Q series oil-stored type oil separator is suitable for compressor rack that return oil with discharge pressure (high pressure). It can store the separated lubricating oil at the bottom in the oil storage section. Relying on the pressure difference between the oil separator and the low pressure side of the compressor rack, the lubricating oil is delivered to each compressor through the oil level control system.

- E-86065QA design pressure: 2.9MPa(gauge);
- E-86080QA design pressure: 2.9MPa(gauge);
- E-86100QA design pressure: 2.9MPa(gauge);
- E-86125QA design pressure: 2.5MPa(gauge);
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A.

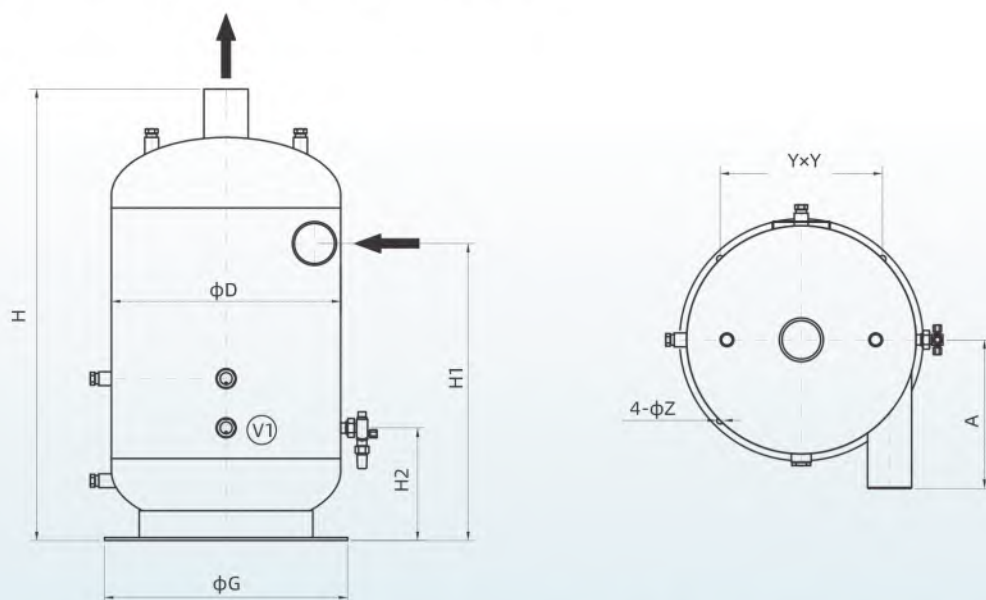

型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	Y (mm)	G (mm)	φZ (mm)	油出口 Oil Outlet (SAE)	V1 油容积 Oil Volume (l)	总容积 Total Volume (l)
E-86065QA	φ76BW	412	916	620	207	270	290	440	14	5/8"	19.0	91
E-86080QA	φ89BW	462	919	601	231	300	327	490	14	5/8"	25.7	113
E-86100QA	φ108BW	512	1017	641	231	330	360	540	18	7/8"	33.0	152
E-86125QA	φ133BW	612	1108	702	259	400	436	650	18	7/8"	52.7	240

备注: 制冷能力请参考F-86Q系列储油式油分离器。

Remark: Please take the refrigeration capability of F-86Q series oil-stored type oil separator as your reference.

F-96系列二次油分离器是针对满液式制冷装置和高压缩比工况运行的系统设计的。它可以使最少量的油进入系统内部，从而提高换热效率，降低失油危险。

油气混合气沿油分离器内桶与外桶之间形成的环形通道进入油分离器中，油颗粒在离心力的作用下被分离到桶壁上，在这里被分离出来的油颗粒聚集成较大的油滴流入油分离器底部的油收集区。内桶安装了一个用不锈钢丝编织成的除雾器。从而形成了一道捕获雾状油的屏障。这道屏障使雾状油变得紊乱，从而使得它们彼此相互碰撞、聚

F-96 Series Oil Separator is specially designed for the flooded refrigeration system and also for the system whose compression ratio is high. It will allow the least oil to enter into the system, so the heat exchange ratio will be increased and the danger of oil lose will be decreased.

The refrigerant gas containing oil in aerosol form will enter into the oil separator following the circular passage who is formed between the internal and external cylinders. The oil particles will be separated onto the shell wall by the centrifugal force. The separated oil particles get together and become heavier ones and then drip to the oil collection area at the bottom of the oil separator. Inside of this internal cylinder there is a demister which is knited by stainless steel wire. So it engender a barrier to capture the oil in fog form. This barrier make the oil in fog form

集，并且吸附在除雾器上变成油滴，最后靠重力作用到达油分离器底部的油收集区。这个系列产品通过捕获微小颗粒油滴及大部分油蒸气来达到高效油气分离的目的。


内桶下面设计了一个碟状反射屏，反射屏的独特设计使得油收集区域被独立分隔出来，它可以防止油分离器内流速过高时油收集区域内的油被带走。

- 设计压力: 2.9 MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。


chaotic and they collide and get together with each other, and then they will be adsorbed by the demister and final become the oil drop. The oil drop will fall into the oil collection area at the bottom of the oil separator by the gravity action. This series of oil separator achieves the high-performance of oil separation by capturing the tiny oil particles and most of the oil vapour.

And at the bottom of the internal cylinder there is an acetabuliform reflecting screen. With this special design of the reflecting screen it isolates the oil collection area independently, so it prevents the oil in the oil collection area being taken away when the flow rate inside is high.

- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

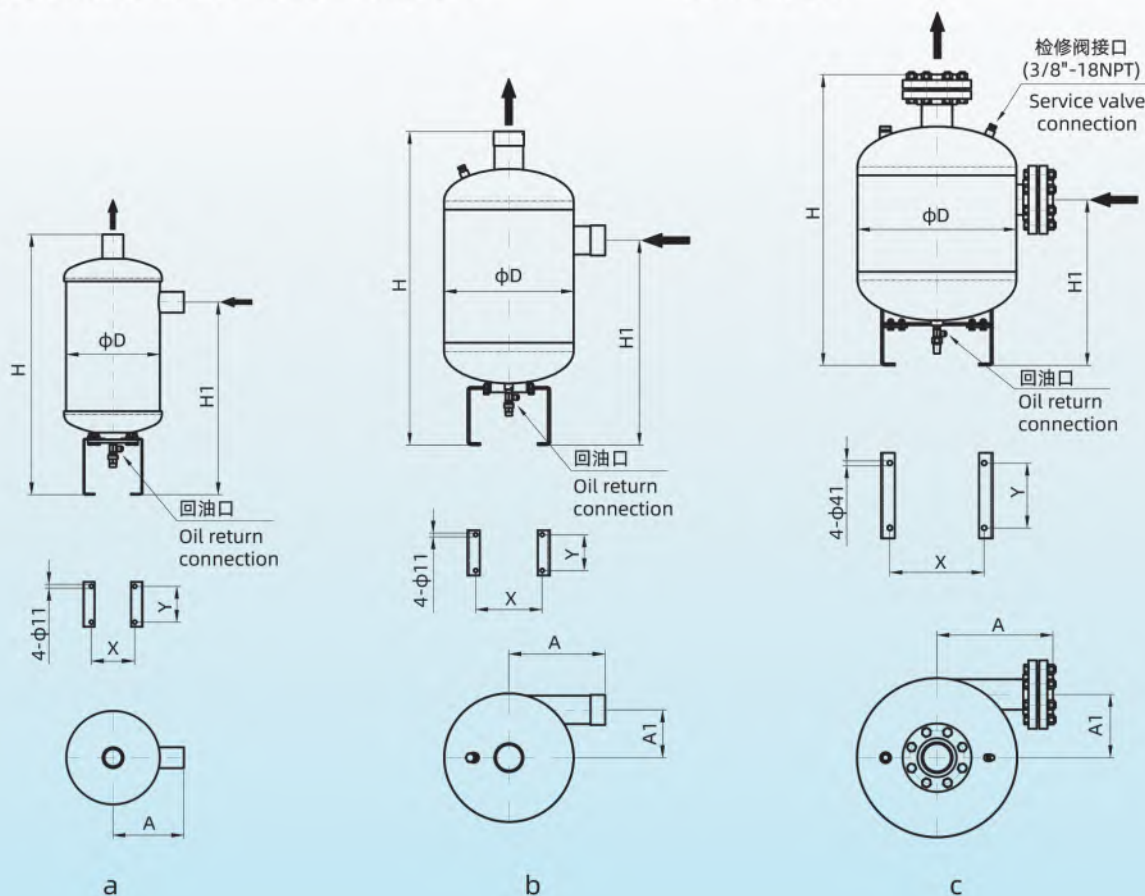

F-96系列应用系统图
F-96 Series Application system diagram




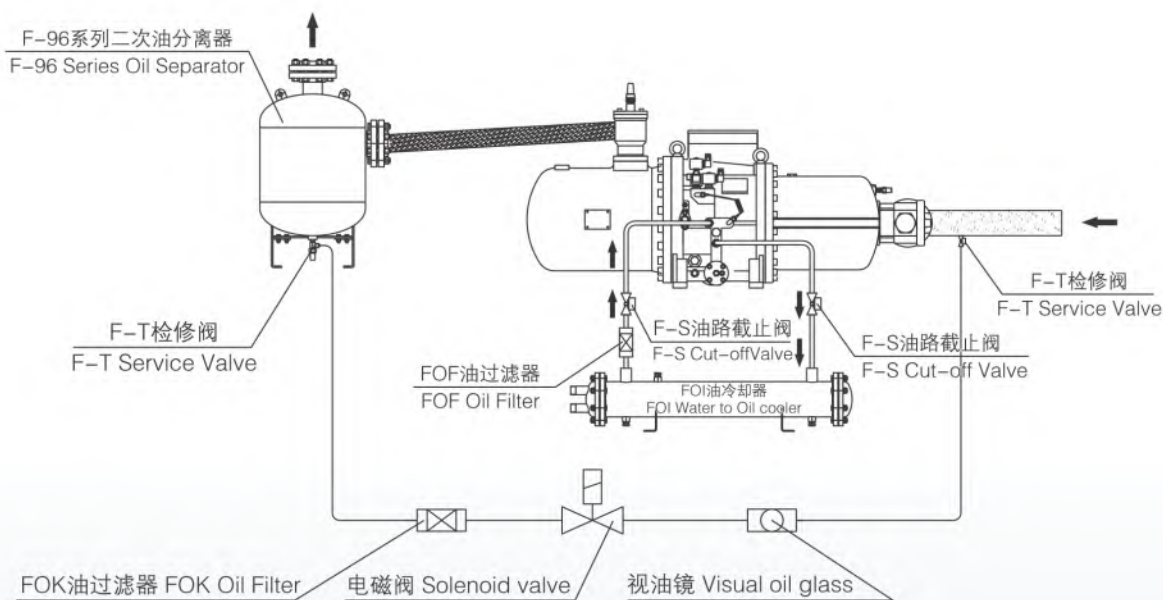


根据压缩机带油量设定回油电磁阀开启频率和时间, 直接将分离出来的润滑油送回压缩机吸气侧。

Setting up the opens frequency and time of the magnetic valve according to the quantity of the oil taken by compressor, and sending the separated oil back to the suction side of compressor directly.

型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	H1 (mm)	A (mm)	A1 (mm)	X (mm)	Y (mm)	油出口 Oil Outlet (SAE)	容积 Volume (l)	图例 Fig.
F-961A	1-5/8"	219	714	533	166	-	126	105	3/8"	16	a
F-961B	2-1/8"	273	765	558	199	-	194	105	3/8"	24	a
F-961C	2-5/8"	325	876	600	258	120	195	105	3/8"	41	b
F-961D	3-1/8"	377	919	609	280	140	195	105	3/8"	60	b
F-963A	DN65	412	841	491	322	160	275	190	3/8"	60	c
F-963B	DN80	462	863	485	358	180	275	190	3/8"	76	c
F-963C	DN100	516	1006	588	397	190	275	190	3/8"	117	c
F-963D	DN125	616	1101	628	446	230	275	190	3/8"	184	c





F-96系列二次油分离器制冷能力
The refrigerating capacity of F-96 Series secondary oil separator
(表一)

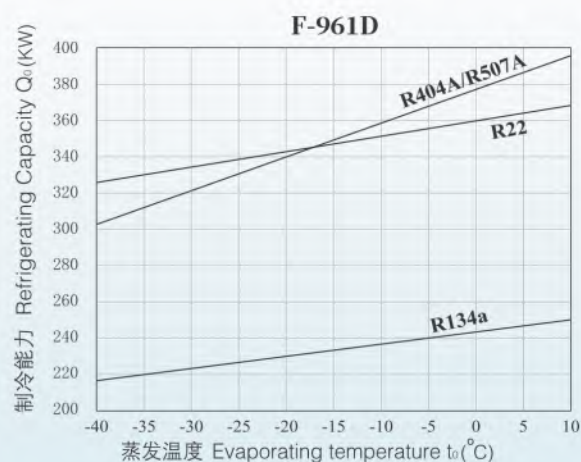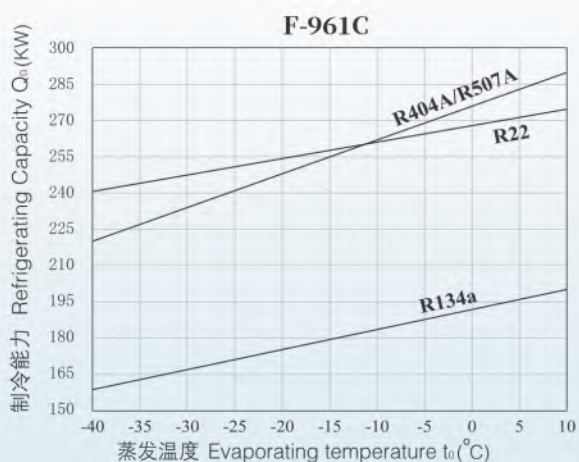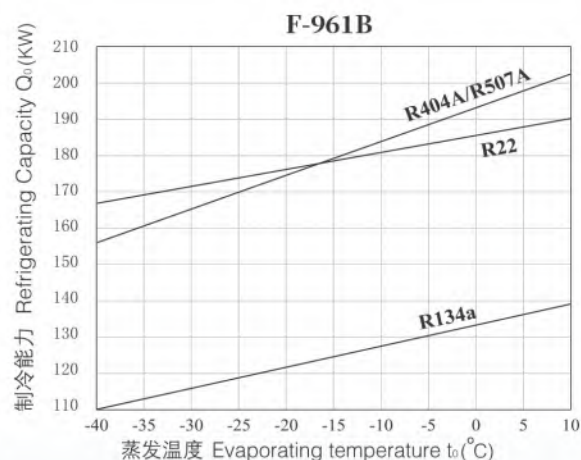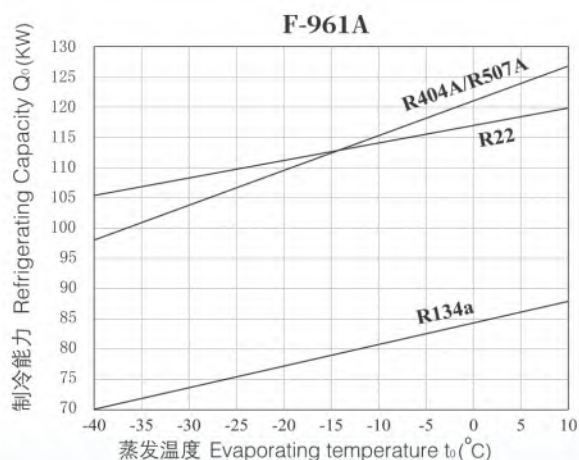

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

F-96系列二次油分离器制冷能力
The refrigerating capacity of F-96 Series secondary oil separator
(表二)

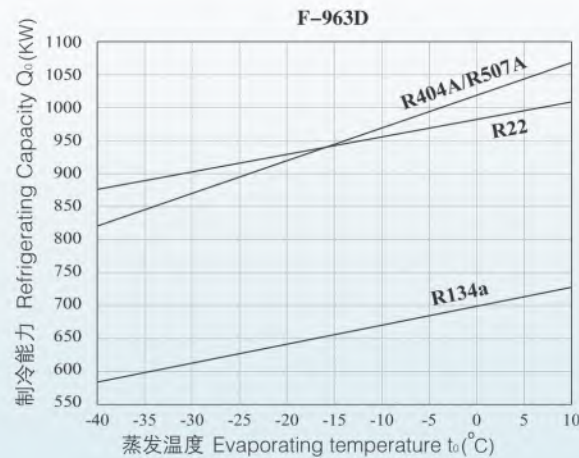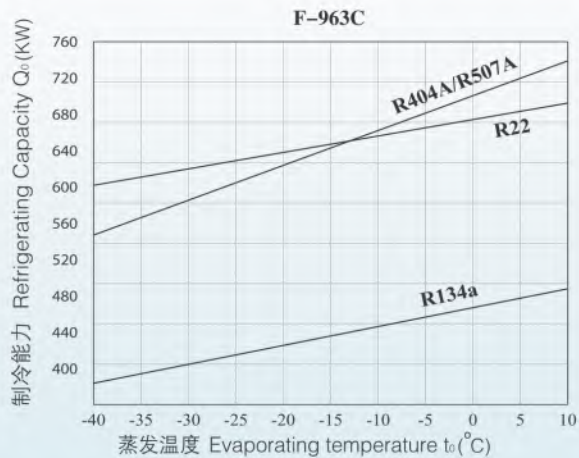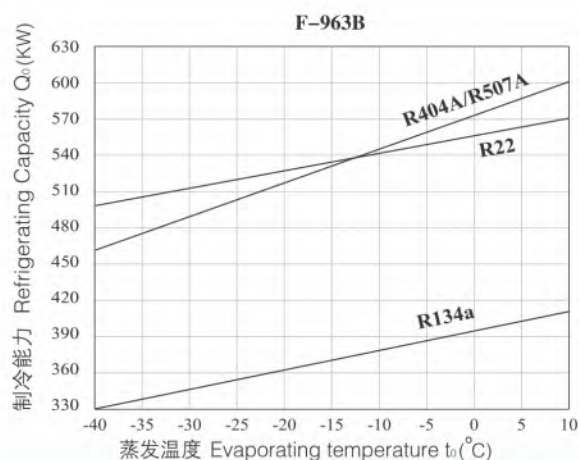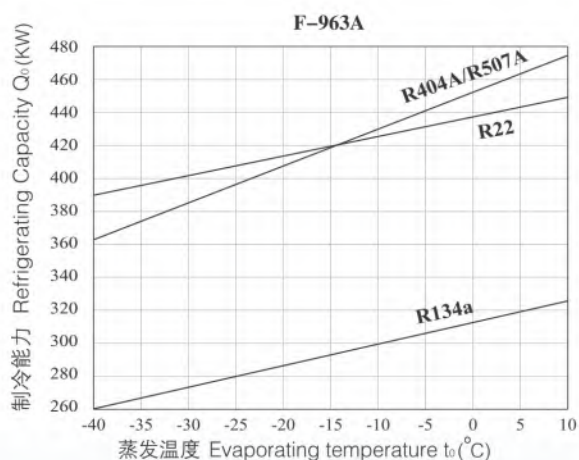

上述数据基于: 冷凝温度+40°C, 排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.


E-96 Series Oil Separator E-96系列二次油分离器

E-96系列二次油分离器是针对满液式制冷装置和高压压缩比制冷系统设计的。它可以使最少量的油进入系统内部, 从而提高换热器效率, 降低压缩机缺油风险。

- E-962A设计压力: 2.9 MPa (表压);
- E-962B设计压力: 2.9 MPa (表压);
- E-962C设计压力: 2.9 MPa (表压);
- E-962D设计压力: 2.5 MPa (表压);
- 适用制冷剂: R134a, R22, R407C, R404A, R507A。

E-96 series oil separator is specially designed for the flooded refrigeration system and high compression ratio refrigeration system. It can make the minimum amount of oil into the system, so as to improve the efficiency of heat exchanger and reduce the risk of compressor oil shortage.

- E-962A design pressure: 2.9 MPa (gauge);
- E-962B design pressure: 2.9 MPa (gauge);
- E-962C design pressure: 2.9 MPa (gauge);
- E-962D design pressure: 2.5 MPa (gauge);
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A.

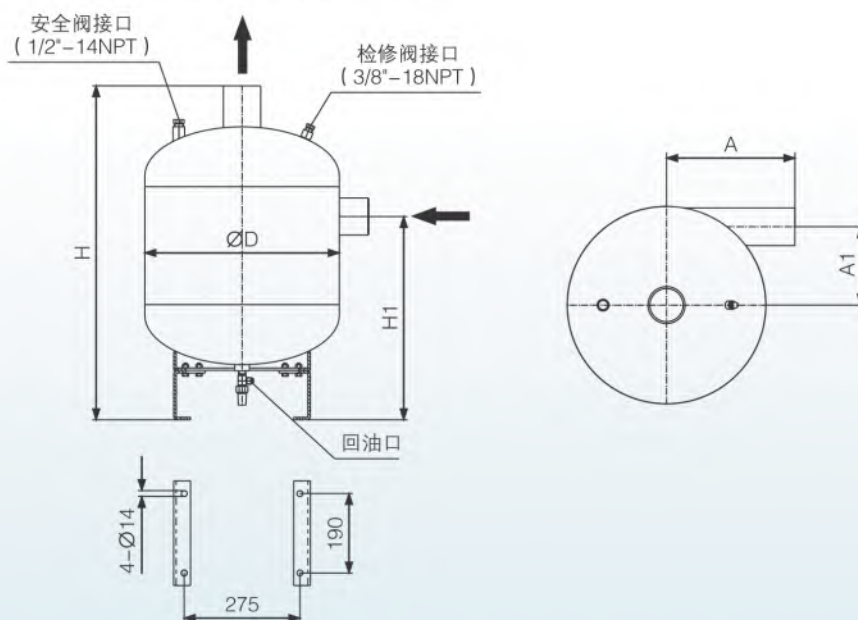

型号 Model	接口尺寸 Joint Size (Inch)	ϕD (mm)	H (mm)	H1 (mm)	A (mm)	A1 (mm)	油出口 Oil Outlet (SAE)	容积 Volume (l)
E-962A	$\phi 76BW$	412	789	493	270	162	3/8"	60
E-962B	$\phi 89BW$	462	799	486	300	184	3/8"	76
E-962C	$\phi 108BW$	512	958	587	330	190	3/8"	117
E-962D	$\phi 133BW$	612	1034	623	400	230	3/8"	184

备注: 制冷能力请参考F-96系列二次油分离器。

Remark: Please take the refrigeration capability of F-96 series oil separator as your reference.

OVS系列螺杆机外置油分离器适用于不带油分离器的螺杆式压缩机及多台压缩机并联螺杆压缩机组。


★特别提示：如果设备在较低的环境温度中使用油分离器应该进行保温处理。

- 设计压力：2.9 MPa（表压）；
- 适用制冷剂：R134a,R22,R407C,R404A,R507A

OVS series external oil separator for screw compressor can be used for the screw compressor without oil separator, it can be also used for the parallel screw compressor unit.

★ Special note: If the oil separator was fixed in low ambient temperature, do please perform insulation treatment to it.

- Design pressure: 2.9 MPa（gauge）；
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A.

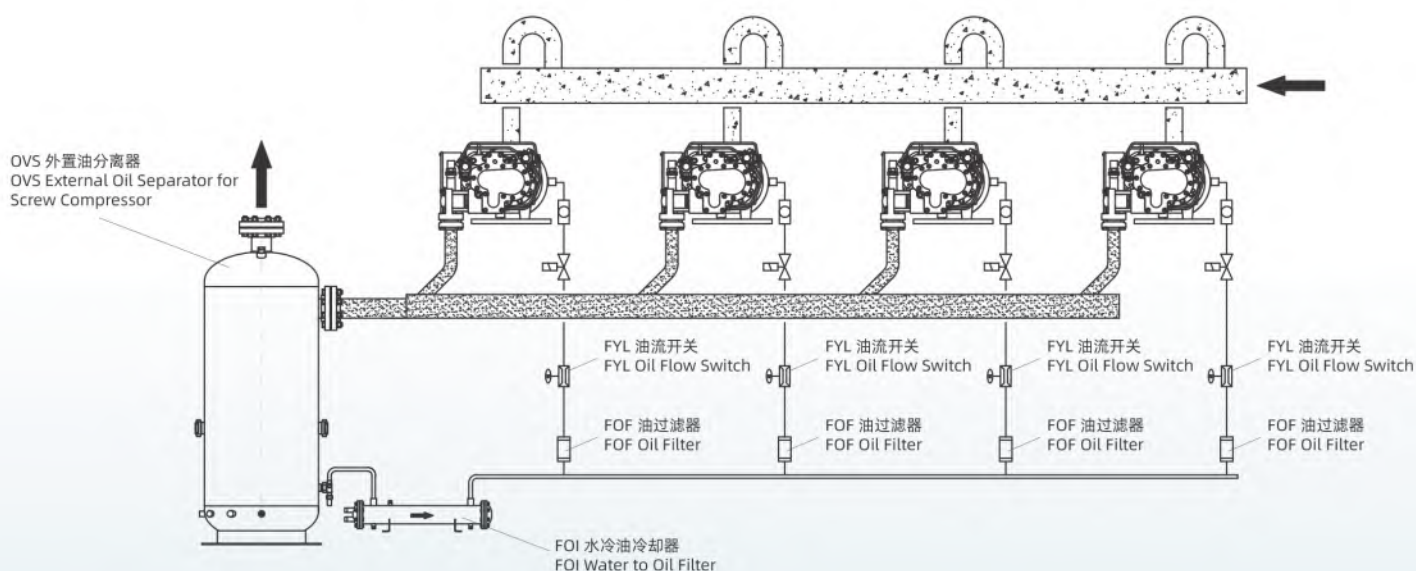

技术参数 Technical Data

型号 Model	高/中温范围High/Medium temperature range		低温范围 Low temperature range
	R134a,R22	R404A, R507A	R134a, R22, R404A,R507A
OVS.20/6	130	110	180
OVS.40/6	250	220	300
OVS-90	450	340	520
OVS-120	580	440	660
OVS-220	1160	840	1320
OVS-400	1320	1180	1550
OVS-670	2050	1900	2500
OVS-1100	2800	2550	3400

以上标注基于在40℃冷凝温度允许压缩机最大理论排量VH(m³/h)

The allowed max. theoretical displacement VH(m³/h) listed as above are on the basis of 40℃ condensing temperature

1	制冷剂出口 Refrigerant outlet
2	制冷剂进口 Refrigerant inlet
3	注油阀连接口Conn. for oil charging valve
4	油出口 Oil outlet
5	油位视镜 Oil level sight glass
6	油加热器接口Conn. for oil heater
7	油温传感器接口 Conn. for oil temperature sensor
8	油位监测口Conn. for oil level monitoring
9	安全阀接口 Conn. for safety valve
10	检修阀 Conn. for check valve



外形尺寸Dimensional Drawings

	OVS.20/6	OVS.40/6	OVS-90	OVS-120	OVS-220	OVS-400	OVS-670	OVS-1100
最大注油量(L) Max. Oil charge(L)	10	19	40	50	90	140	250	330
总容积(L) Total volume(L)	29	50	90	126	239	404	672	1113
φD(mm)	273	325	377	412	512	666	766	920
H(mm)	725	880	1103	1248	1495	1549	1903	2223
H1(mm)	210	291	427	475	550	501	662	639
H2(mm)	145	191	202	210	240	276	367	419
H3(mm)	465	559	732	870	1075	1018	1018	1494
A(mm)	230	272	305	322	385	468	523	609
A1(mm)	110	120	148	160	200	265	300	365
Y×Y(mm)	193	230	267	290	360	465	530	655
φG(mm)	296	350	410	440	540	700	800	970
φZ(mm)	12	13	13	14	18	18	18	20
制冷剂进口(mm) Refrigerant inlet (mm)	42(ODS)	54(ODS)	DN65	DN65	DN80	DN100	DN125	DN150
制冷剂出口(mm) Refrigerant outlet (mm)	42(ODS)	54(ODS)	DN65	DN65	DN80	DN100	DN125	DN150
油出口(mm) Oil outlet(mm)	φ16	φ22	φ28	φ28	φ42	φ54	φ76	φ76
油加热 Oil heater	140W×1	300W×1	300W×2	300W×2	300W×3	300W×3	300W×3	300W×5
油加热输入 Input oil heater	1P/230V/AC							
图例 Fig.	a	b	c	c	c	c	c	c

ELY Series External Oil Separator for Screw Compressor ELY系列螺杆机外置油分离器

ELY系列螺杆机外置油分离器适用于不带油分离器的螺杆式压缩机及多台压缩机并联螺杆压缩机组。



★ 特别提示: 如果设备在较低的环境温度中使用油分离器应该进行保温处理。

- ELY-20设计压力: 2.9 MPa (表压);
- ELY-40设计压力: 2.9 MPa (表压);
- ELY-90设计压力: 2.9 MPa (表压);
- ELY-120设计压力: 2.9 MPa (表压);
- ELY-220设计压力: 2.9 MPa (表压);
- ELY-400设计压力: 2.5 MPa (表压);
- ELY-670设计压力: 2.5 MPa (表压);
- ELY-1100设计压力: 2.5 MPa (表压);
- 适用制冷剂: R134a, R22, R407C, R404A, R507A。



ELY series external oil separator for screw compressor can be used for the screw compressor without oil separator, it can be also used for the screw compressor and parallel screw compressor unit.

★ Special note: If the oil separator was fixed in low ambient temperature, do please perform insulation treatment to it.

- ELY-20 design pressure: 2.9 MPa (gauge);
- ELY-40 design pressure: 2.9 MPa (gauge);
- ELY-90 design pressure: 2.9 MPa (gauge);
- ELY-120 design pressure: 2.9 MPa (gauge);
- ELY-220 design pressure: 2.9 MPa (gauge);
- ELY-400 design pressure: 2.5 MPa (gauge);
- ELY-670 design pressure: 2.5 MPa (gauge);
- ELY-1100 design pressure: 2.5 MPa (gauge);
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A.

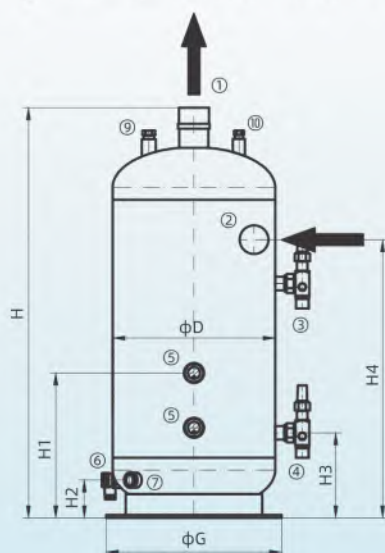

a

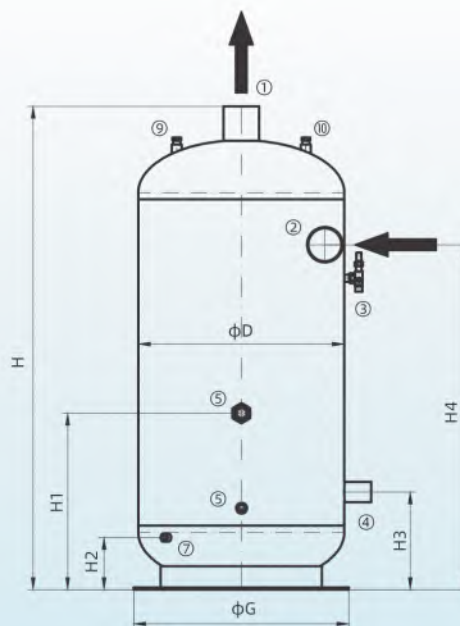

b

技术参数Technical Data

型号 Model	高/中温范围High/Medium temperature range		低温范围 Low temperature range
	R134a、R22	R404A、R507A	R134a、R22、R404A、R507A
ELY-20	130	110	180
ELY-40	250	220	300
ELY-90	450	340	520
ELY-120	580	440	660
ELY-220	1160	840	1320
ELY-400	1320	1180	1550
ELY-670	2050	1900	2500
ELY-1100	2800	2550	3400

以上标注基于在40°C冷凝温度允许压缩机最大理论排量VH(m³/h)

The allowed max. theoretical displacement VH (m³/h) listed as above are on the basis of 40°C condensing temperature

连接位置Connection Positions

1	制冷剂出口 Refrigerant outlet
2	制冷剂进口 Refrigerant inlet
3	注油阀连接口Conn. for oil charging valve
4	油出口 Oil outlet
5	油位视镜 Oil level sight glass
6	油加热器接口Conn.for oil heater
7	油温传感器接口Conn. for oil temperature sensor
8	油位监测口Conn. for oil level monitoring
9	安全阀接口 Conn. for safety valve
10	检修阀 Conn. for check valve

外形尺寸Dimensional Drawings

	ELY-20	ELY-40	ELY-90	ELY-120	ELY-220	ELY-400	ELY-670	ELY-1100
最大注油量 Max. Oil charge(L)	10	19	40	50	90	140	250	330
总容积 Total volume(L)	29	50	90	120	220	400	670	1100
φD(mm)	273	325	377	412	215	662	766	916
H(mm)	682	824	1049	1193	1428	1479	1808	2105
H1(mm)	210	291	425	474	549	498	660	636
H2(mm)	65	76	90	99	129	163	195	221
H3(mm)	145	171	200	209	239	273	365	416
H4(mm)	465	559	730	869	1076	1015	1290	1491
A(mm)	195	220	255	270	320	400	450	550
A1(mm)	110	120	148	162	200	270	310	365
YxY(mm)	193	230	267	290	360	465	530	655
φG(mm)	296	350	410	440	540	700	800	970
φZ(mm)	12	13	13	14	18	18	18	20
制冷剂进口 Refrigerant inlet (mm)	1-5/8"ODS	2-1/8"ODS	φ76(BW)	φ76(BW)	φ89(BW)	φ108(BW)	φ133(BW)	φ159(BW)
制冷剂出口 Refrigerant outlet (mm)	1-5/8"ODS	2-1/8"ODS	φ76(BW)	φ76(BW)	φ89(BW)	φ108(BW)	φ133(BW)	φ159(BW)
油出口 Oil outlet(mm)	φ16(ODS)	φ22(ODS)	φ28(ODS)	φ28(ODS)	φ42(ODS)	DN50(BW)	DN65(BW)	DN65(BW)
油加热 Oil heater	140W×1	300W×1	300W×2	300W×2	300W×3	300W×3	300W×3	300W×5
油加热输入 Input oil heater	1P/230V/AV							
图例 Fig.	a	b	b	b	b	b	b	b

OWS Series Horizontal Oil Separator for Screw Compressor OWS 卧式螺杆机油分离器

OWS系列卧式螺杆机油分离器适用于不带油分离器的螺杆式压缩机，由于OWS的优秀设计，可以使最少量的润滑油进入系统内部，确保压缩机良好的润滑，提高系统效率。

油分离器下部为储油部分，设计了标准油位视油镜和最低油位视油镜。

油分离器的油加热器应在压缩机停止时通电工作，压缩机运转时油加热器应停止工作。如果在低环境温度中使用需将油分离器作保温处理。


- 设计压力：2.9 Mpa；
- 适用制冷剂：R134a、R22、R407C、R404A、R507A。

OWS series horizontal oil separator for screw compressor can be used for the screw compressor without oil separator. Because of the excellent design of OWS, it will allow the least lubricant enter into the system, to make sure there will have enough lubricant to the compressor, and the system efficiency will be increased.

There is an oil-stored area at the bottom of oil separator, and it is designed with standard oil sight glass and lowest-oil level sight glass.

The oil heater of oil separator shall be power up to work when the compressor stops running, and it shall stop working when compressor starts to run. If you used the oil separator in low-temperature environment, do please preform the insulation treatment to it.

- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

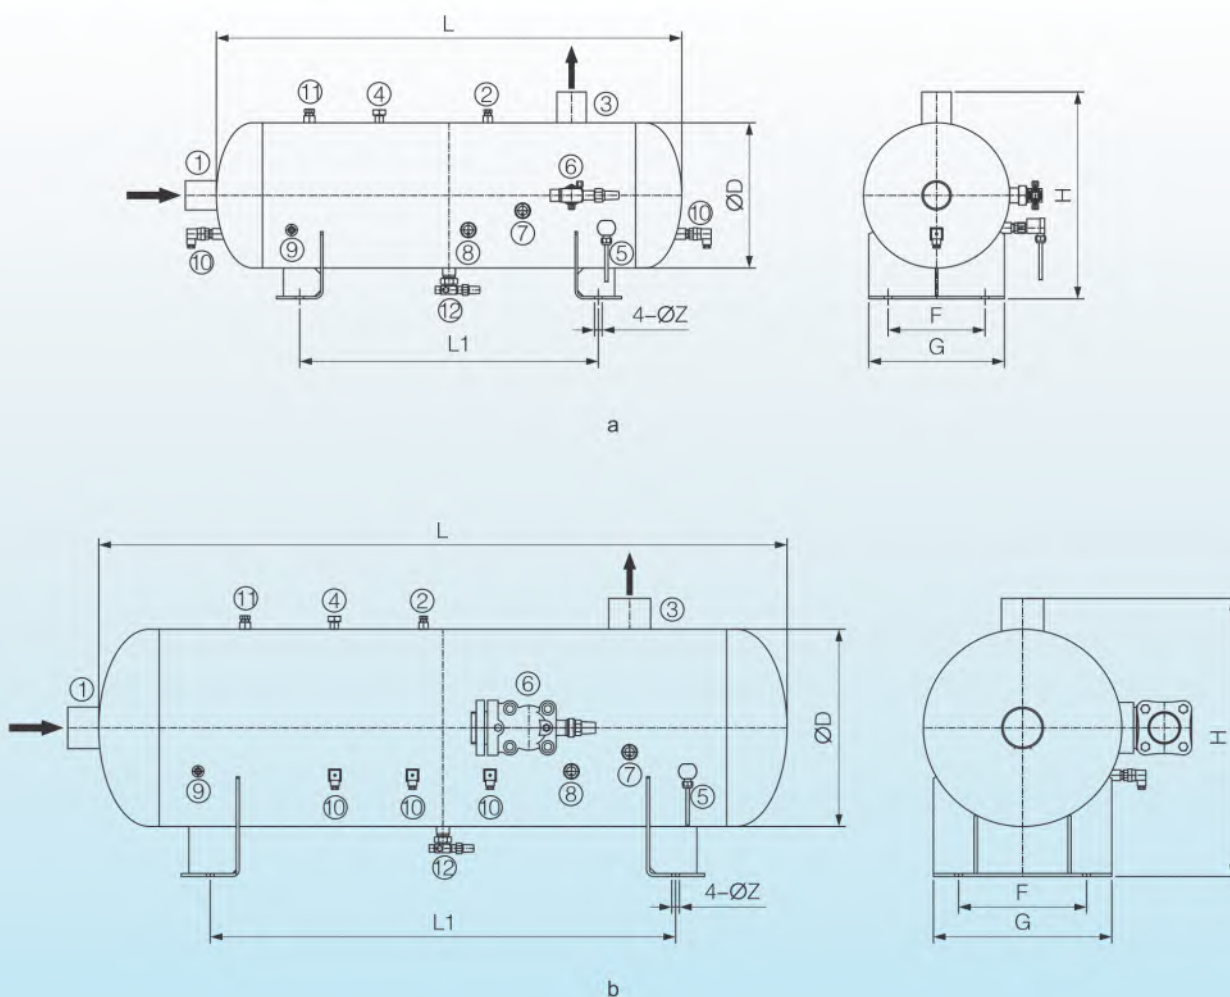

连接位置 Connection Positions

1	制冷剂进口Refrigerant inlet
2	检修阀连接口Conn. for service valve
3	制冷剂出口Refrigerant outlet
4	注油阀连接口Conn. for oil charging valve
5	油位开关接口Conn. for oil level monitoring
6	油出口Oil outlet
7	超限油位视镜 Transfinite oil-level sight glass
8	标准油位视镜 Standard oil-level sight glass
9	油温传感器接口Conn. for oil temperature sensor
10	油加热器接口Conn. for oil heater
11	安全阀接口Conn. for safety valve
12	放油口Conn. for oil drain

外形尺寸 Dimensional Drawings





	OWS-50	OWS-120	OWS-240	OWS-330	OWS-530	OWS-800	OWS-1200
最大注油量Max.oil charge(L)	19	40	80	108	177	249	305
总容积 Total Volume (L)	51	120	240	330	532	796	1182
φD(mm)	273	377	462	512	616	716	816
L(mm)	1000	1200	1596	1775	2000	2200	2500
L1 mm)	660	770	1100	1200	1300	1450	1650
H(mm)	413	537	692	742	766	966	1066
G(mm)	260	350	420	460	550	640	720
F(mm)	180	250	290	330	400	460	530
φZ(mm)	20	20	20	20	20	20	20
制冷剂进口Refrigerant inlet(mm)	DN50	DN65	DN80	DN100	DN125	DN125	DN150
制冷剂出口Refrigerant outlet(mm)	DN50	DN65	DN80	DN100	DN125	DN125	DN150
油出口Oil outlet(mm)	φ22	φ28	φ28	φ42	φ42	φ76	φ76
油加热器Oil heater	140W×2	300W×2	300W×3	300W×3	300W×3	300W×4	300W×5
油加热器输入Oil heater input	1P/230V/AC						
图例 Fig.	a	a	b	b	b	b	b

OWS 卧式螺杆机油分离器制冷能力

OWS系列卧式螺杆机油分离器制冷能力表

OWS Series Horizontal Oil Separator for Screw Compressor Refrigerating Capacity Table

(表一)

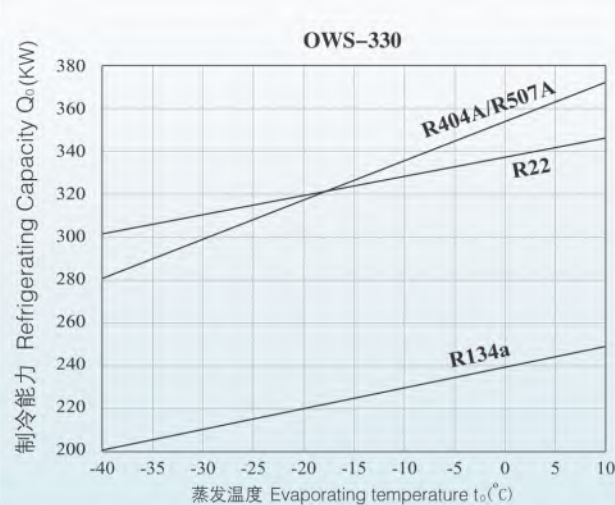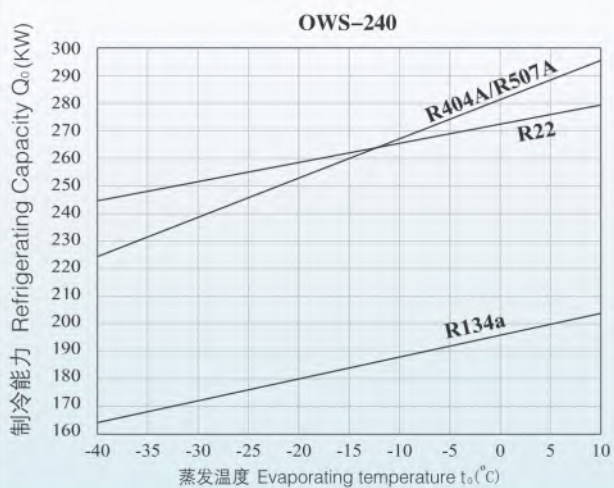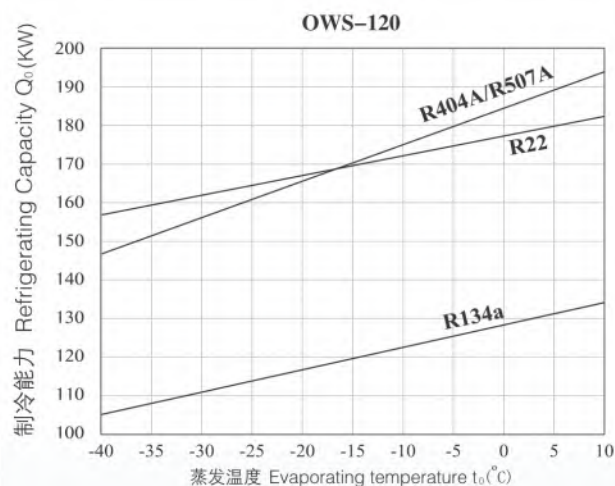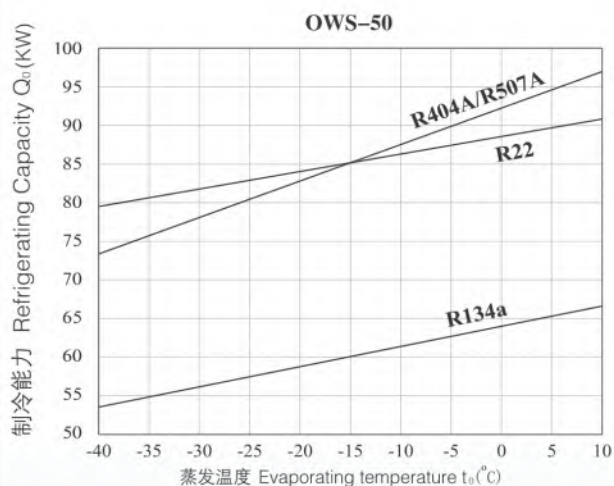




上述数据基于：冷凝温度+40°C，排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

OWS系列卧式螺杆机油分离器制冷能力表

OWS Series Horizontal Oil Separator for Screw Compressor Refrigerating Capacity Table

(表二)

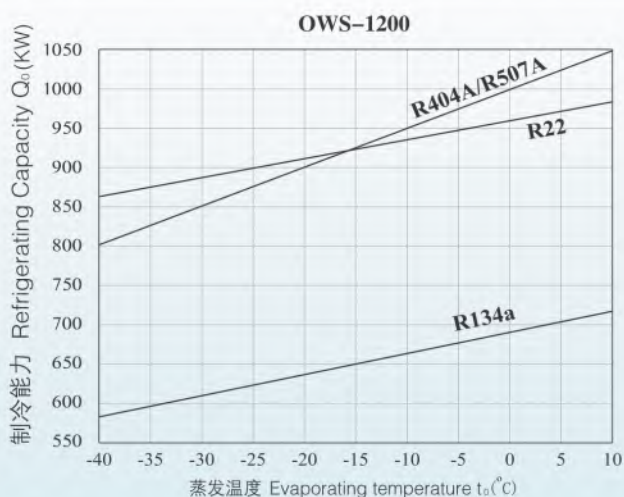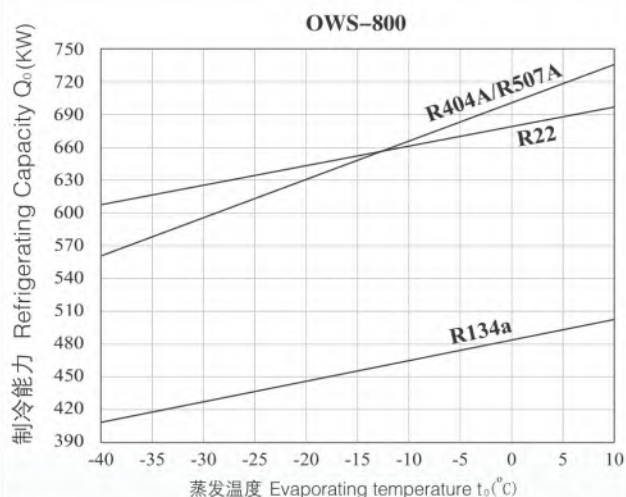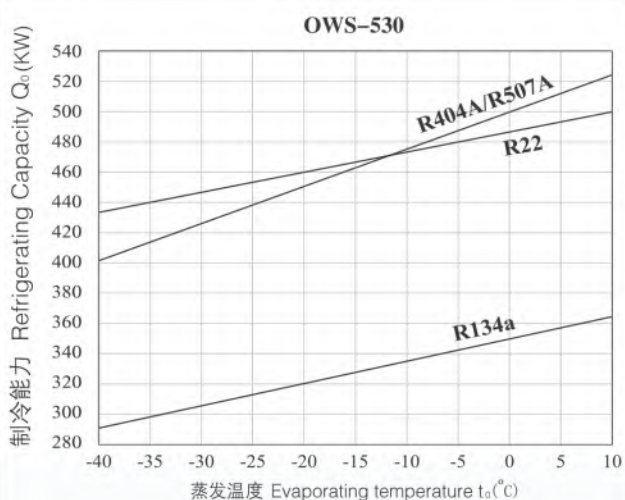

上述数据基于：冷凝温度+40°C，排气温度+80°C。

Based on the above date: condensing temperature+40°C, exhaust temperature+80°C.

OLX螺杆机粗效油过滤器/OLX-48W粗效油过滤芯

OLX螺杆机粗效油过滤器

OLX螺杆机粗效油过滤器安装在OVS螺杆机外置油分离器油出口，可以过滤掉系统中大于50 μ m的颗粒，有效地保证了螺杆机外部油管路系统正常使用。

- 设计压力：2.9MPa；
- 过滤精度：50 μ m；
- 适用制冷剂：R134a、R22、R407C、R404A、R507A；
- 适用润滑油：矿物冷冻机油(MO),多元醇酯合成冷冻机油(POE),烷基苯合成冷冻机油(AB)。


OLX Screw compressor coarse oil filter is installed on the oil outlet of OVS screw compressor external oil separator. It can filter system is larger than 50 μ m particles in order to ensure the external screw compressor oil pipeline system for normal use.

- The design pressure: 2.9MPa;
- Filter accuracy: 50 μ m;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- Can be used with mineral oil (MO)、full synthetic (POE)、semi-synthetic lubricant(AB).

OLX-48W粗效油过滤芯

滤芯为百褶式设计，具有非常大的过滤面积和非常小的压力降。


The filter core is designed by balayeuse type. It has vast filter area and make small pressure drop.

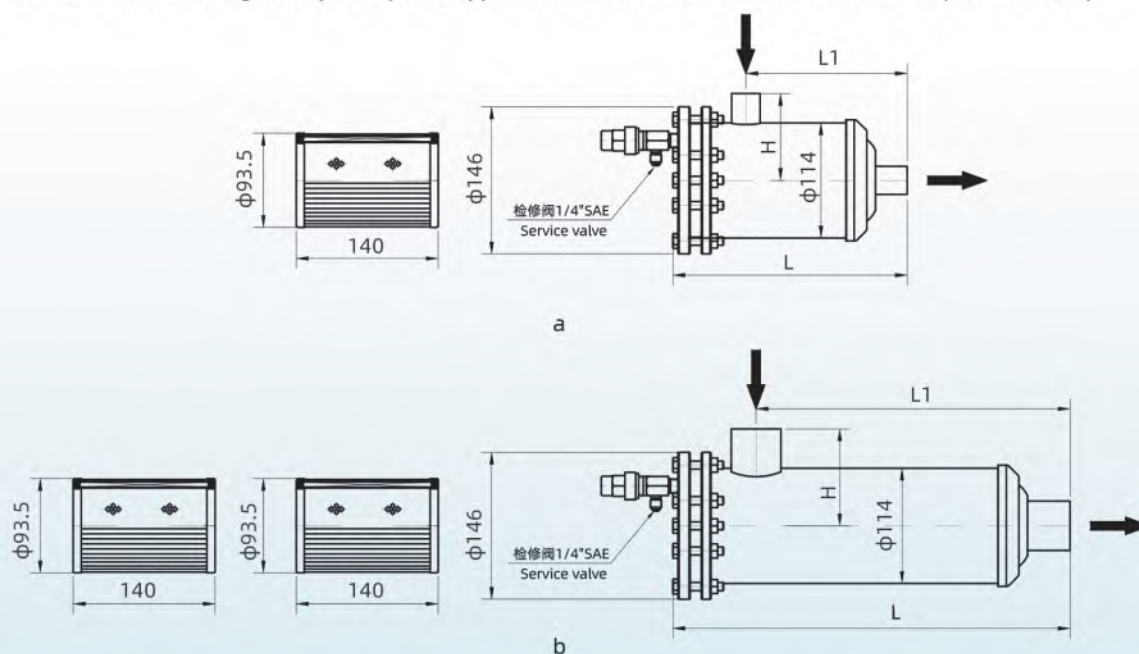

型号 Model	接口尺寸 Joint Size (ϕ mm)	L (mm)	L1 (mm)	H (mm)	过滤面积 Filter Area(m^2)	图例 Fig.
OLX-05	16	224	156	76	0.12	a
OLX-07	22	234	163	86	0.12	a
OLX-09	28	234	160	85	0.12	a
OLX-11	35	389	311	96	0.24	b
OLX-13	42	389	307	96	0.24	b
OLX-17	54	390	302	97	0.24	b
OLX-25	76	400	300	96	0.24	b


FOF螺杆机油过滤器 专门为螺杆机外部油管路系统设计，进出口配有1-1/4"-12UNF阳螺纹，可方便的和7/8"ODS、5/8"ODS、1/2"ODS、3/8"ODS直线接头连接。过滤芯与进出口呈 "T" 形连接，这样在更换过滤芯时不需要拆卸连接管路。

- 最大许可工作压力：31 bar;
- 最高运行温度：+120°C;
- 过滤精度：25μm;
- 适用制冷剂：R134a、R22、R407C、R404A、R507A;
- 适用润滑油：矿物冷冻机油(MO),多元醇酯合成冷冻机油(POE),烷基苯合成冷冻机油(AB)。

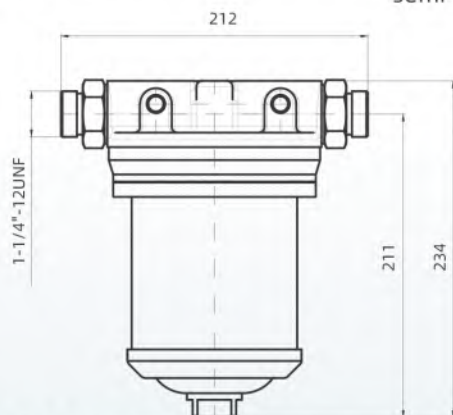


FOF Oil filter is special design for the outside oil line system design of screw compressor. The inlet and outlet are assembled with 1-1/4"-12UNF male screw, and it can be connected with 7/8"ODS、5/8"ODS、1/2"ODS and 3/8"ODS connectors expediently. The oil filter core is assembled with "T" type to the inlet and outlet, with this design, it is no need to disassemble the connection line when you replace the oil filter core.

- Max. Admissible Working Pressure: 31 bar;
- The highest running temperature: +120 °C;
- Filter accuracy: 25 μ m;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- Can be used with mineral oil (MO)、full synthetic(POE)、semi-synthetic lubricant(AB).

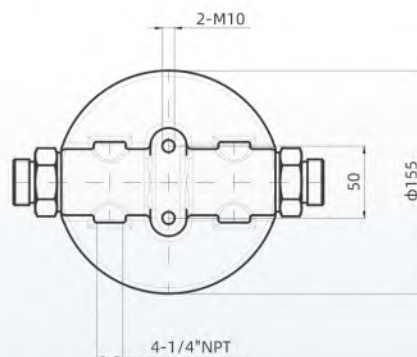


FOF螺杆机油过滤器用直线接头

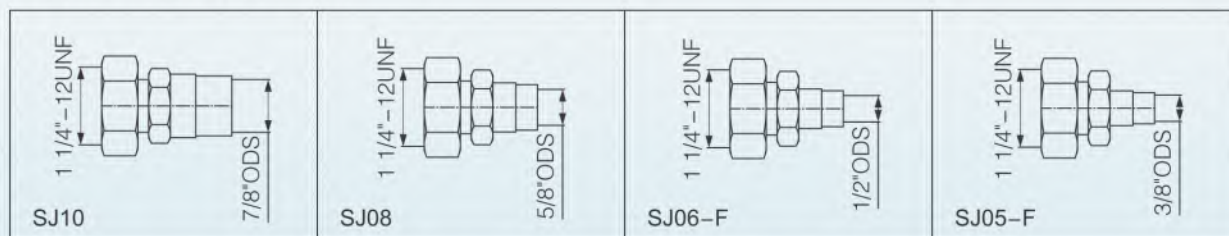

FOF-OOW油过滤芯 滤芯为百褶式设计，具有非常大的过滤面积和非常小的压力降。FOF-OOW油过滤芯可以替换比泽尔HS.53, HS.64, HS.74, HS.85系列螺杆机油过滤器。

FOF-OOW Oil Filter Core The Oil filter core is design with balayeuse type. It has vast filter area and quite small pressure drop. FOF-OOW oil filter core also can be used for Bitzer HS.53, HS.64, HS.74, HS.85 series oil filter for screw compressor.

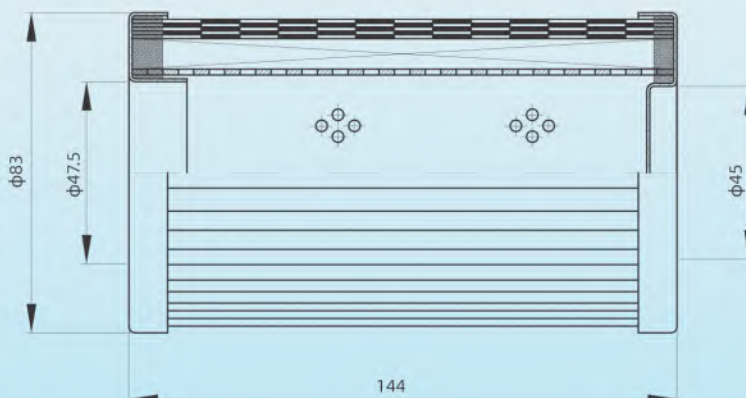

FYL Series Oil Flow Switch FYL系列油流量开关


FYL系列产品可以监控螺杆机油流量，当螺杆机油流量低于接通最小流量时，活塞开关自动断开，保护轴承和转子免受无润滑的影响，减少设备维护费用，进出口配有1"-14UNS阳螺纹。

- 为了开关能长久的工作必须对开关簧片进行保护，不可以直接连入低压电路；
- 高效的流量通道，确保极低的压力降；
- 最大许可工作压力：31bar；
- 适用润滑油：矿物冷冻机油(MO),多元醇酯冷冻机油(POE),烷基苯冷冻机油(AB)。
- 电气特性：最大开关电压/AC220V,最大开关电流/0.5A；
- 润滑油温度：最高+120℃；


FYL series products can monitor the screw compressor's oil flow, when the screw compressor's oil flow is lower than the minimum flow, the piston switch disconnected automatically, protect the bearing and rotor from the influence of no lubrication, reduce equipment maintenance costs, inlet and outlet with 1" -14 UNS external screw thread.

● In order to switch on/off for a long time, the reed switch must be protected, can not be directly connected to the low voltage circuit;


- Efficient flow channel, to ensure a very low pressure drop;
- Electrical characteristics: maximum switching voltage: AC220V, maximum switching current: 0.5A;
- Maximum permitted work pressure: 31bar;
- Lubricating oil temperature: maximum+120℃;
- Applicable lubricating oil: mineral refrigerator oil (MO), polyol ester refrigerator oil(POE), alkylbenzene refrigerator oil (AB).

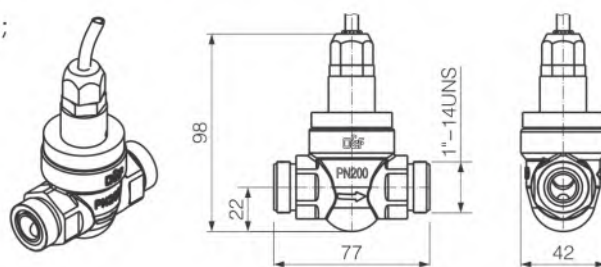

FYL油流开关用直线接头

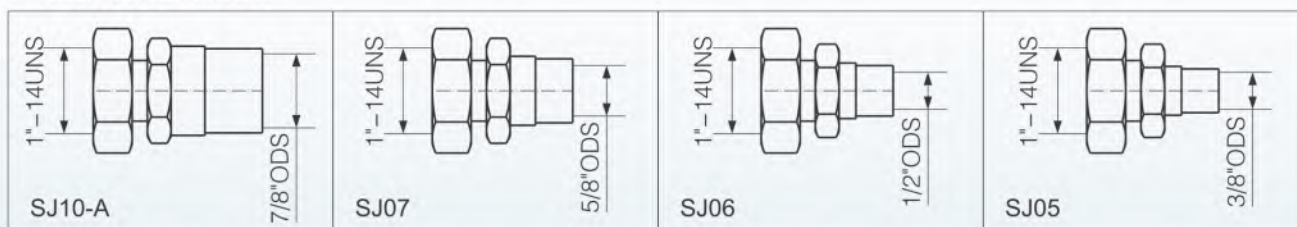

型号 Model	接通最小流量 Swith on min. Flow	连接 Connections
FYL-04	4l/min	1"-14UNS
FYL-06	6l/min	1"-14UNS
FYL-08	8l/min	1"-14UNS
FYL-10	10l/min	1"-14UNS

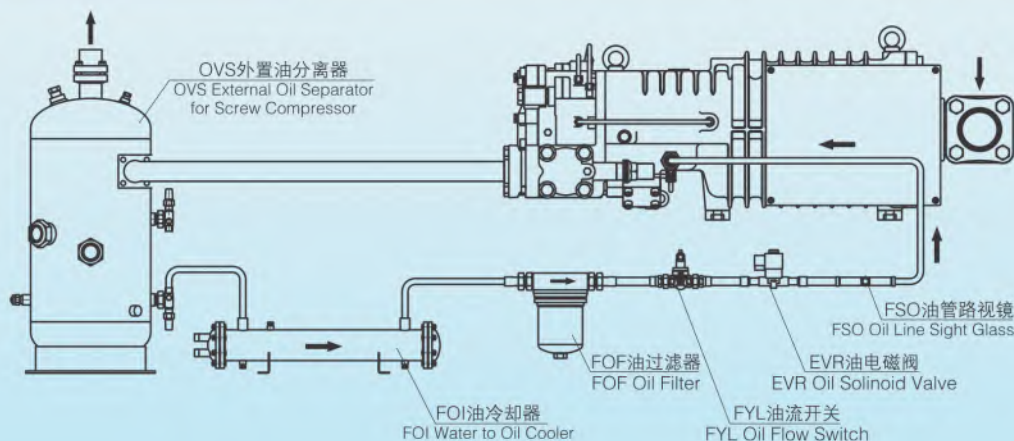

● 功能及参数:

- ◇ 对干簧管开关进行保护, 避免回路中的电压和电流损坏干簧管开关。即便是低电压 ($\leq 10V$)和弱电流 ($\leq 1mA$)也会导致干簧管开关损坏。
- ◇ 输入电压: AC220V $\sim 240V \pm 10\%$ 50Hz 3VA
- ◇ 环境温度: $-30^{\circ}C \sim +70^{\circ}C$
- ◇ 继电器触点容量: AC 240V 7A 300VA

● 工作原理:

上电后, 继电器吸合(11-14接通; 11-12断开), 绿色指示灯“亮”, 并检测S1-S2状态。当检测到S1-S2为断开状态时, 开始计时, 计时到15秒, 继电器脱开(11-14断开; 11-12接通), 红色指示灯“亮”, 绿色指示灯“灭”, 计时清零。

当计时未到15秒时, 检测到S1-S2再次接通, 保持继电器吸合状态, 计时清零。

当继电器脱开期间, 检测到S1-S2接通时, 延时1~3秒防抖动确认, 继电器吸合(11-14接通; 11-12断开)绿色指示灯“亮”。

● Function and parameter:



- ◇ To protect the reed switch from the damage of voltage and current in the loop. even low voltage ($\leq 10 V$) and weak current($\leq 1 mA$) can cause damage to the contact of reed switch.
- ◇ Power supply voltage: AC220V $\sim 240V \pm 10\%$ 50Hz 3VA
- ◇ Working environment temperature: $-30^{\circ}C \sim +70^{\circ}C$
- ◇ Contact capacity of relay: AC 240V 7A 300VA

● Working principle:


When the control module is powered on, the relay is energized (11-14 on; 11-12 off), and the green LED indicator light "on", the s1-s2 state is detected at the same time. When the s1-s2 is detected as disconnected (s1-s2 opened), start timing, timing to 15 seconds, turn off the relay (11-14 off ; 11-12 on), the red LED indicator light "on", the green LED indicator light "off", and the timer clears.

When the timing is less than 15 seconds, it is detected that the s1-s2 is switched on (s1-s2 closed) again, keep the relay energized state, and the timer is cleared.

When the relay is dis-energized (11-14 off; 11-12 on), when the s1-s2 is detected on (s1-s2 connected), the delay of 1~3 seconds for anti-jitter confirmation, the relay is energized again (11-14 on; 11-12 off), and the green LED indicator light "on".

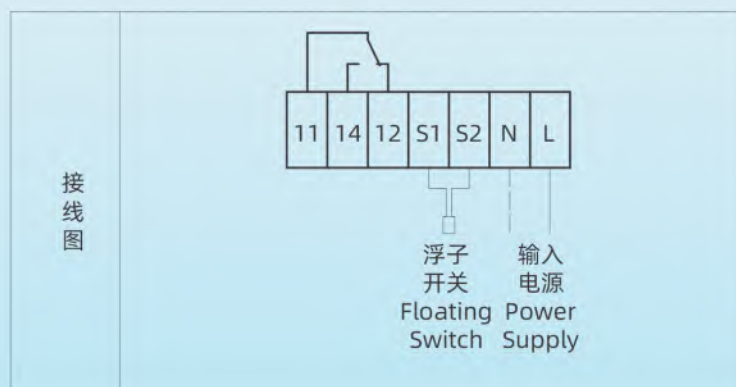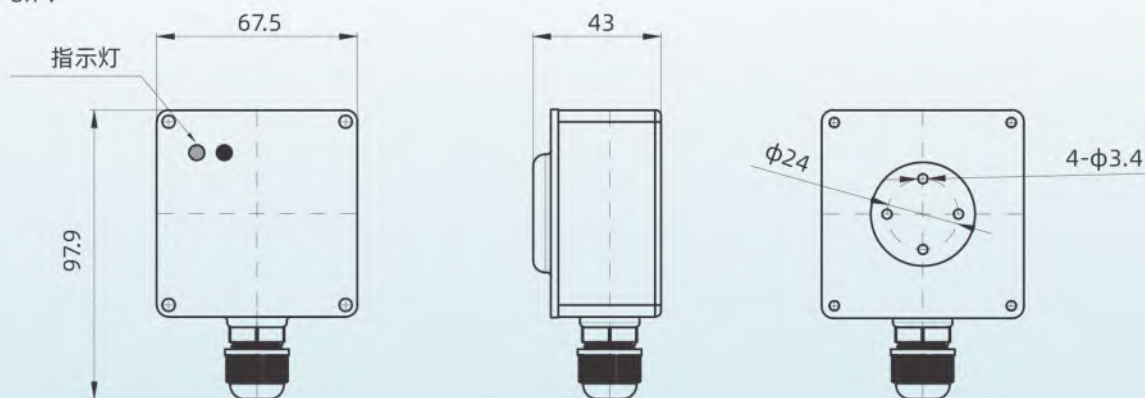

FOI Series Water to Oil Cooler FOI系列水冷油冷却器

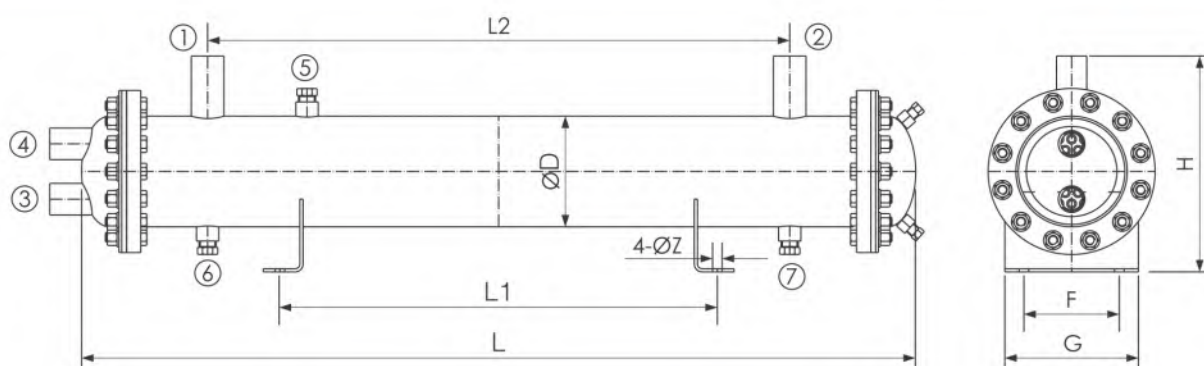


尺寸 Dimension	型号 Model	FOI-29B2	FOI-57B2	FOI-86B2	FOI-120B2	FOI-180B2	FOI-200B2
φD		114	140	140	140	165	219
L		931	1048	1348	1748	1928	1881
L1		450	550	840	1240	1240	1100
L2		634	732	1032	1432	1533	1361
H		257	269	288	288	346	395
G		168	180	180	180	220	290
F		120	120	120	120	160	230
φZ		12	12	12	12	14	14
技术数据Technical date							
换热量Heat exchange capacity	KW	7.00	13.40	20.80	31.70	44.52	77.10
水流量 Water flow	m³/h	3.0	4.5	6.0	7.5	13.0	18.0
压降 Pressure drop	bar	0.057	0.051	0.100	0.170	0.266	0.098
油流量Oil flow	m³/h	0.7	1.4	2.2	3.2	4.8	8.0
油侧内部容积 Internal capacity on the side of oil	L	4.7	8.7	11.6	15.5	23.8	35.0
油侧最大工作压力 The Max. working pressure on the side of oil	bar	29	29	29	29	29	29
水侧最大工作压力 The Max. working pressure on the side of water	bar	10	10	10	10	10	10
参考数据 Reference date							
进水口温度 The water temperature in the inlet	+30℃	出水口温度 The water temperature in the outlet				+35℃	
进油口温度 The oil temperature in the inlet	+80℃	出油口温度 The oil temperature in the outlet				+60℃	
污垢系数 Scale factor	0						
接口尺寸 Connection dimension							
① 油进口 Oil inlet		1-3/8"ODS	1-3/8"ODS	1-5/8"ODS	1-5/8"ODS	2-1/8"ODS	φ76×4.0
② 油出口 Oil outlet		1-3/8"ODS	1-3/8"ODS	1-5/8"ODS	1-5/8"ODS	2-1/8"ODS	φ76×4.0
③ 进水口 Water inlet		G3/4"	G1"	G1-1/4"	G1-1/4"	G1-1/4"	G2"
④ 出水口 Water outlet		G3/4"	G1"	G1-1/4"	G1-1/4"	G1-1/4"	G2"
⑤ 安全阀接口 Safety valve connection		1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT
⑥ 排污口 Drain		1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT
⑦ 放油口 Oil discharge outlet		1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT	1/2"-14NPT

- 输入电压: 380V/AC/50Hz
- 合理的管路设计保证了最小的压力降
- 适用矿物冷冻机油(MO)、多元醇酯合成冷冻机油(POE)、烷基苯合成冷冻机油(AB)
- Input voltage: 380V/AC/50Hz
- Reasonable design of the tube line can make sure the minimum pressure drop
- Can be used with mineral oil (MO), full synthetic (POE), semi-synthetic lubricant(AB)

型号 Model	油接口尺寸 Oil connection size (φmm)	电机功率 Motor power (w)	油容积 Oil volume (l)	额定功率(kw)(空气温度) Nominal capacity in kw (with air admission temperature)			
				27°C	32°C	36°C	43°C
FFO-025	16	90×1	1.3	3.5	3.2	2.9	2.5
FFO-050	22	135×1	1.8	7.0	6.4	5.8	5.0
FFO-100	22	230×1	2.7	11.0	10.5	9.5	8.0
FFO-200	28	420×1	3.9	17.5	16.0	14.5	12.5
FFO-300	28	550×1	5.2	20.5	18.5	17.0	14.0
FFO-400	28	800×1	7.1	31.5	28.5	26.0	22.5
FFO-500	28	550×2	10.4	41.0	37.0	34.0	28.0
FFO-600	28	800×2	14.2	63.0	57.0	52.0	45.0

以上数据基于: 油进口温度: +80°C
The data listed above is on the base of the temperature of oil inlet is +80°C

型号Model	L(mm)	L1(mm)	A(mm)	A1(mm)	H(mm)	图例 Fig.
FFO-025	485	420	332	252	393	a
FFO-050	568	500	332	252	444	a
FFO-100	668	600	342	252	545	a
FFO-200	775	700	442	352	647	a
FFO-300	875	800	452	352	749	a
FFO-400	1025	950	452	352	850	a
FFO-500	1625	1550	452	352	749	b
FFO-600	1925	1850	452	352	850	b

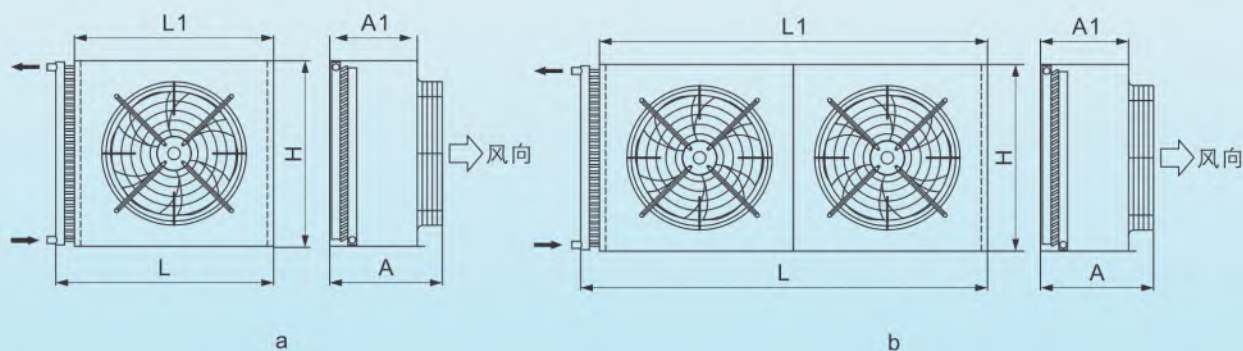


HODKV系列经济器是由板式换热器、过滤器、视液镜、电磁阀、膨胀阀5部分组成的, 全部配件连接和板式换热器保温在工厂内完成, 方便客户现场安装。

- 标配电磁阀输入: 220V/AC/50Hz (如需其它输入请在订单中注明)
- 标配热力膨胀阀适用制冷剂: R22,R407C (如需使用其它制冷剂请在订单中注明)

The HODKV series ECO consists of five components: a plate heat exchanger, a filter, a sight glass, a solenoid valve, and an expansion valve. All parts are connected and the heat exchanger's insulation are pre-assembled in the factory, facilitating on-site installation by customers.

- Standard solenoid valve input: 220V/AC/50Hz (additional input options are available upon request).
- Standard thermal expansion valve compatible with R22 and R407C refrigerants (please specify other refrigerants in your order if you need).

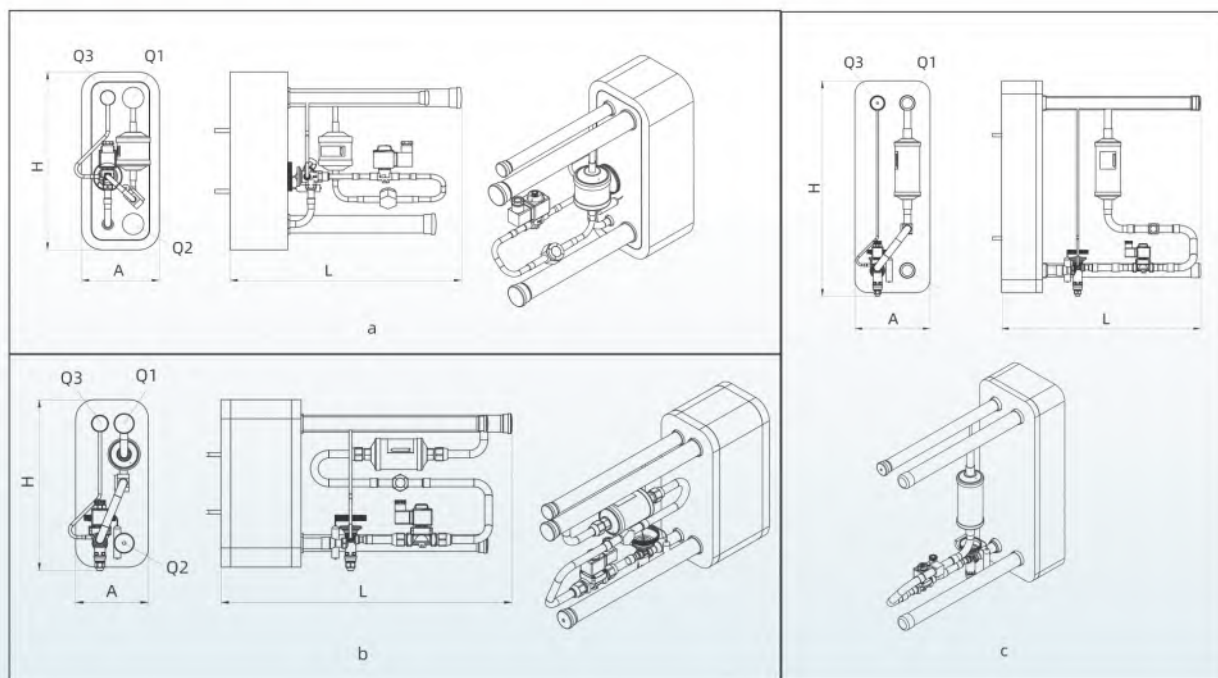

型号 Model	接口尺寸 (inch) Conn. size (inch)			外形尺寸 (mm) Outline dimension (mm)			图例 Fig.
	Q1(ODF)	Q2(ODF)	Q3(ODF)	L	A	H	
HODKV001	7/8"	7/8"	5/8"	420	118	352	a
HODKV002	1-1/8"	1-1/8"	7/8"	443	153	352	a
HODKV003	1-1/8"	1-1/8"	7/8"	443	153	352	a
HODKV004	1-3/8"	1-3/8"	7/8"	455	153	352	a
HODKV005	1-3/8"	1-3/8"	1-1/8"	571	153	358	b
HODKV006	1-3/8"	1-3/8"	1-1/8"	604	153	357	b
HODKV007	2-1/8"	2-1/8"	1-3/8"	568	233	668	c
HODKV008	2-1/8"	2-1/8"	1-5/8"	639	233	668	c

接口用途 Application of the connections:

- | | |
|------------------|---|
| Q1:液管进口 | Q1: Inlet of the liquid line |
| Q2:液管出口 | Q2:Outlet of the liquid line |
| Q3:接压缩机经济器(ECO)口 | Q3: Connected to the connection (ECO) of the compressor's economizer |

HODKV系列经济器选型参数表
HODKV Series Economizer Model Selection Form

型号 Model	经济器温度: +5°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: +0°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -5°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -10°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -15°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -20°C Economizer temp. 经济器负荷(KW) Economizer load
HODKV001	6.3~8.9	5.8~8.2	5.3~7.5	4.8~6.8	4.9~6.4	4.5~5.8
HODKV002	9.5~13.3	8.7~12.2	7.9~11.1	7.2~10.1	6.7~9.5	6.0~8.5
HODKV003	12.0~16.9	11.0~15.5	10.1~14.1	9.1~12.8	8.6~12.0	8.3~10.8
HODKV004	14.7~20.6	13.5~18.9	12.3~17.2	11.1~15.6	10.4~14.6	10.0~13.1
HODKV005	19.8~28.3	18.7~26.7	17.4~24.9	16.2~23.1	15.2~21.3	13.8~19.3
HODKV006	27.9~39.8	26.7~38.1	25.2~36.0	23.6~33.7	22.7~31.8	20.6~28.9
HODKV007	39.9~57.0	36.9~52.7	33.8~48.3	30.7~43.9	30.1~39.2	26.9~35.0
HODKV008	46.6~66.6	43.5~62.1	40.3~57.5	36.8~52.6	36.5~47.4	32.7~42.5


以上数据基于: 制冷剂: R22, R407C, 冷凝温度: +40°C
The data listed above is on the base of refrigerant R22, R407C, and the condensing temperature +40°C

HODKS系列经济器是由板式换热器、过滤器、视液镜、电磁阀、膨胀阀5部分组成的, 全部配件连接和板式换热器保温在工厂内完成, 方便客户现场安装。

- 标配电磁阀输入: 220V/AC/50Hz (如需其它输入请在订单中注明)
- 标配热力膨胀阀适用制冷剂: R404A,R507A (如需使用其它制冷剂请在订单中注明)

The HODKS series ECO consists of five components: a plate heat exchanger, a filter, a sight glass, a solenoid valve, and an expansion valve. All parts are connected and the heat exchanger's insulation are pre-assembled in the factory, facilitating on-site installation by customers.

- Standard solenoid valve input: 220V/AC/50Hz (additional input options are available upon request).
- Standard thermal expansion valve compatible with R404A and R507A refrigerants (please specify other refrigerants in your order if you need).

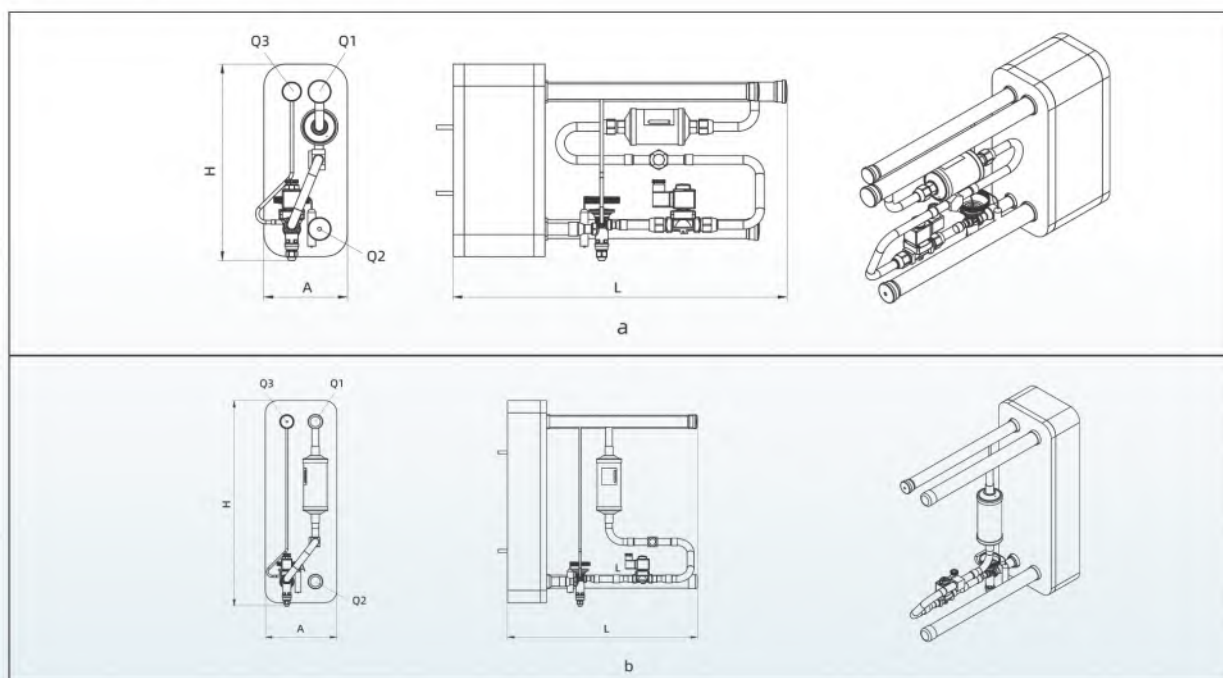

型号 Model	接口尺寸 (inch) Conn. size (inch)			外形尺寸 (mm) Outline dimension (mm)			图例 Fig.
	Q1(ODF)	Q2(ODF)	Q3(ODF)	L	A	H	
HODKS001	1-1/8"	1-1/8"	7/8"	543	153	358	a
HODKS002	1-3/8"	1-3/8"	7/8"	571	153	358	a
HODKS003	1-3/8"	1-3/8"	1-1/8"	596	153	358	a
HODKS004	1-3/8"	1-3/8"	1-1/8"	566	155	597	b
HODKS005	1-3/8"	1-3/8"	1-1/8"	566	155	597	b
HODKS006	2-1/8"	2-1/8"	1-1/8"	598	233	668	b
HODKS007	2-1/8"	2-1/8"	1-3/8"	597	233	683	b
HODKS008	2-1/8"	2-1/8"	1-5/8"	619	233	683	b
HODKS009	2-1/8"	2-1/8"	1-5/8"	640	233	682	b
HODKS010	2-1/8"	2-1/8"	2-1/8"	695	233	658	b

接口用途 Application of the connections:

Q1:液管进口

Q1: Inlet of the liquid line

Q2:液管出口

Q2: Outlet of the liquid line

Q3:接压缩机经济器(ECO)口

Q3: Connected to the connection (ECO) of the compressor's economizer

HODKS系列经济器选型参数表 HODKS Series Economizer Model Selection Form

型号 Model	经济器温度: +5°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: +0°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -5°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -10°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -15°C Economizer temp. 经济器负荷(KW) Economizer load	经济器温度: -20°C Economizer temp. 经济器负荷(KW) Economizer load
HODKS001	10.2 ~ 14.6	9.7 ~ 13.8	8.9 ~ 12.7	8.2 ~ 11.7	7.4 ~ 10.6	6.7 ~ 9.6
HODKS002	13.5 ~ 19.3	12.8 ~ 18.3	11.8 ~ 16.9	10.9 ~ 15.6	9.9 ~ 14.1	9.0 ~ 12.8
HODKS003	19.0 ~ 27.2	18.3 ~ 26.2	17.3 ~ 24.7	16.1 ~ 23.0	14.8 ~ 21.1	13.5 ~ 19.2
HODKS004	23.1 ~ 33.0	21.4 ~ 30.6	19.5 ~ 27.9	17.6 ~ 25.2	15.8 ~ 22.6	14.1 ~ 20.1
HODKS005	29.2 ~ 41.7	27.0 ~ 38.6	24.6 ~ 35.1	22.1 ~ 31.5	19.8 ~ 28.2	17.5 ~ 25.0
HODKS006	34.2 ~ 48.8	31.7 ~ 45.3	29.1 ~ 41.5	26.3 ~ 37.6	23.8 ~ 33.9	21.2 ~ 30.3
HODKS007	51.0 ~ 72.8	46.8 ~ 66.9	42.3 ~ 60.4	37.8 ~ 54	33.8 ~ 48.2	29.8 ~ 42.6
HODKS008	58.0 ~ 82.8	53.3 ~ 76.1	48.1 ~ 68.7	43.0 ~ 61.4	38.3 ~ 54.7	33.9 ~ 48.4
HODKS009	76.5 ~ 109.3	70.2 ~ 100.3	62.7 ~ 89.6	54.8 ~ 78.3	47.2 ~ 67.4	41.2 ~ 58.8
HODKS010	---	---	83.1 ~ 108.1	74.0 ~ 96.3	65.0 ~ 84.5	---

以上数据基于: 制冷剂: R404A/R507A, 冷凝温度: +40°C
The data listed above is on the base of refrigerant R404A/R507A, and the condensing temperature +40°C

储油器用于储存未蓄留在压缩机曲轴箱内, 又不在油分离器中, 也不再系统中进行循环的润滑油。在储油器里, 所有溶于润滑油中的制冷剂都会被蒸发出来, 润滑油同时得到冷却。


强烈推荐供油管路中必须安装FOK系列油过滤器。否则, 油中的脏物会导致油位控制器失灵。

- 安装方法: 垂直安装;
- 建议储油器下部的出油口高于压缩机视油镜0.5m安装;
- 储油器上需要安装一个FCV油压差止回阀;
- 设计压力: 2.9MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

FOR Series Oil Reservoir is used for storing the lubricant which have not been remained in the compressor crankcase or not in the oil separator or not in the circulation of the system. Inside of the oil reservoir all the refrigerant which have been melted in the lubricant can be evaporated, and the lubricant will be cooled at the same time.

It is strongly recommended to install FOK series oil filter in the oil feeding line, or the dunghill in the oil will lead to the malfunction of the oil level regulator.

- Installation method: Vertical installation;
- The outlet at the bottom of the oil reservoir must be installed 0.5m higher than the oil sight glass of the compressor;
- It should be installed one piece of FCV-20 oil pressure differential check valve to the oil reservoir;
- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

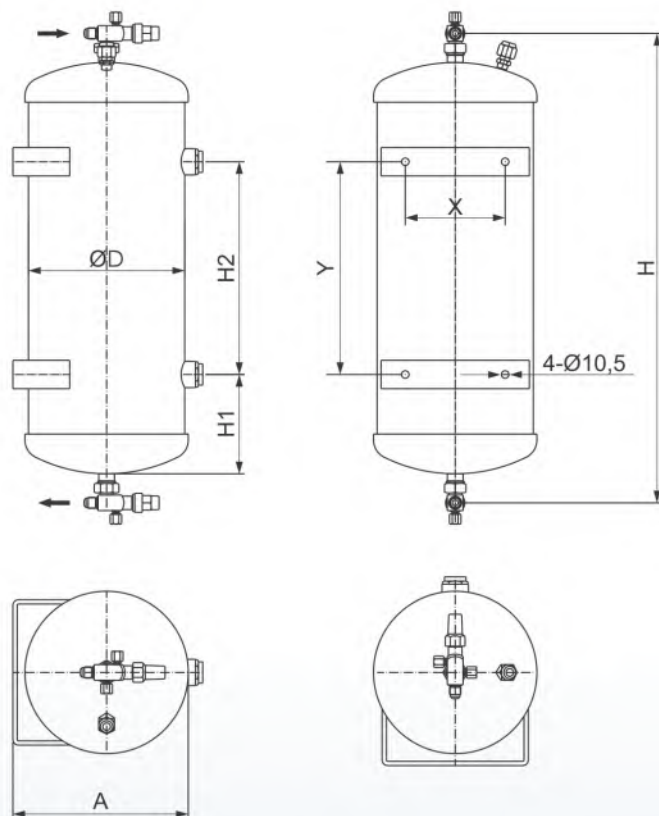

型号 Model	进、出口尺寸 Inlet/Outlet Size (SAE)	ΦD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	X (mm)	Y (mm)	容积 Volume (l)
FOR-6	3/8"	140	528	93	260	164	45	260	6
FOR-8	3/8"	165	516	106	220	186	80	220	8
FOR-10	3/8"	165	621	109	320	186	80	320	10
FOR-12	3/8"	165	721	139	360	186	80	360	12
FOR-14	3/8"	219	518	135	164	242	140	164	14
FOR-19	1/2"	219	663	140	300	242	140	300	19
FOR-23	1/2"	219	778	138	420	242	140	420	23

储油器用于储存未蓄留在压缩机曲轴箱内, 又不在油分离器中, 也不再系统中进行循环的润滑油。在储油器里, 所有溶于润滑油中的制冷剂都会被蒸发出来, 润滑油同时得到冷却。


强烈推荐供油管路中必须安装FOW系列油过滤器。否则, 油中的脏物会导致油位控制器失灵。

- 安装方法: 水平安装。
- 建议储油器底部高于压缩机视油镜0.5m安装;
- 储油器上需要安装一个FCV油压差止回阀;
- 设计压力: 2.9MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

FOW Series Oil Reservoir is used for storing the lubricant which have not been remained in the compressor crank-case or not in the oil separator or not in the circulation of the system. Inside of the oil reservoir all the refrigerant which have been melted in the lubricant can be evaporated, and the lubricant will be cooled at the same time.

It is strongly recommended to install FOW series oil filter in the oil feeding line, or the dunghill in the oil will lead to the malfunction of the oil level regulator.

- Installation method: Horizontal installation;
- The outlet at the bottom of the oil reservoir must be installed 0.5m higher than the oil sight glass of the compressor;
- It should be installed one piece of FCV-20 oil pressure differential check valve to the oil reservoir.
- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

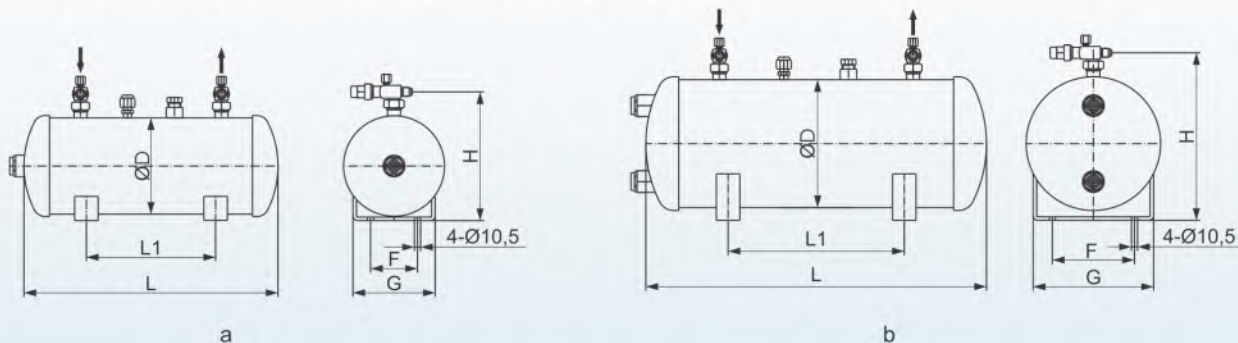



型号 Model	进、出口尺寸 Inlet/Outlet Size (SAE)	φD (mm)	L (mm)	L1 (mm)	H (mm)	F (mm)	G (mm)	容积 Volume (l)	图例 Fig.
FOW-6	3/8"	165	333	140	223	80	140	6	a
FOW-8	3/8"	165	433	220	223	80	140	8	a
FOW-10	3/8"	165	538	320	223	80	140	10	a
FOW-12	3/8"	165	638	360	223	80	140	12	a
FOW-14	3/8"	219	435	164	278	140	205	14	b
FOW-19	1/2"	219	580	300	278	140	205	19	b
FOW-23	1/2"	219	695	420	278	140	205	23	b

FOK系列油过滤器可以用于所有制冷装置上, 滤芯是由非常精密的金属滤网构成的。材料304不锈钢, 百褶式设计, 具有非常大的过滤面积和非常小的压力降, 能用在所有的制冷剂和冷冻油上。

- 最大许可工作压力: 31 bar;
- 最高运行温度: 120°C;
- 过滤精度: 50μm。

FOK series Oil filter can be applied to all kinds of refrigeration equipments. The filter core is composed with quite accurate metal strainer. The material of the filter core is 304 stainless steel, and with the balayruse kind design it has a very wide filtering area and the lowest pressure drop. It can be applied to all kinds of refrigerant and refrigeration oil.

- Max.Admissible Working Pressure: 31 bar;
- The max. running temperature: 120°C;
- Filtering accuracy: 50 μ m.

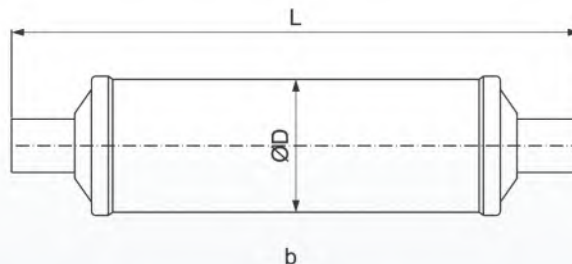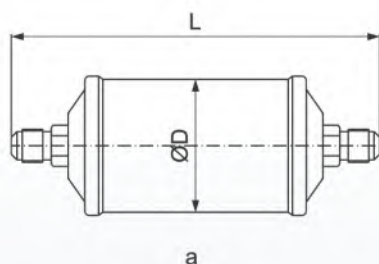


型号 Model	接口尺寸 Joint Size(Inch)	φD (mm)	L (mm)	图例 Fig.
FOK-02	1/4"SAE	64	159	a
FOK-03	3/8"SAE	64	175	a
FOK-04	1/2"SAE	64	179	a
FOK-05	5/8"SAE	64	256	a
FOK-03S	3/8"ODS	64	156	b
FOK-04S	1/2"ODS	64	156	b
FOK-05S	5/8"ODS	64	230	b
FOK-07S	7/8"ODS	64	242	b
FOK-09S	1-1/8"ODS	64	270	b
FOK-11S	1-3/8"ODS	64	280	b

F-OL系列油位控制器是通过浮球式针阀精确的控制压缩机曲轴箱内油位的, 它可以直接或通过相应型号的适配器与各种压缩机连接, 并联机组的多台压缩机可以水平方向安装也可以垂直方向安装。

- 最大许可工作压力: 31 bar;
- 供油接口尺寸: 3/8" SAE;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A;
- 强烈推荐供油管路中必须安装FOK系列油过滤器。否则, 会导致油位控制器失灵。


F-OL Series Oil level regulator accurately controls the oil level in compressor crankcase by float charging valve. It can be directly or by using the relevant type of adapter connected with all models of compressors. The compressors in parallel unit can be installed in horizontal direction or vertical direction.

- Max. Admissible Working Pressure: 31 bar;
- Oil-feeding connection dimension: 3/8" SAE;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- It is strongly recommended to install the FOK series oil filter in the oil feeding line, or the oil level regulator will be unstucked.

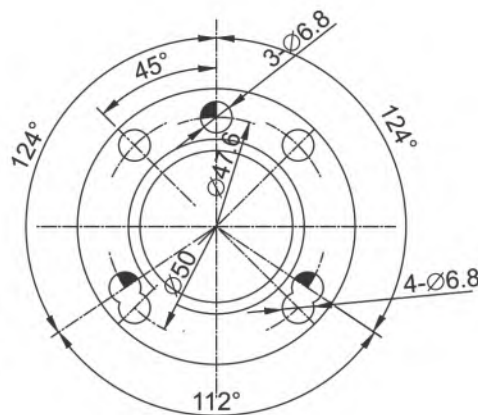

法兰尺寸
Dimension Of The Flange


低压回油系统 Low Pressure Oil Return System

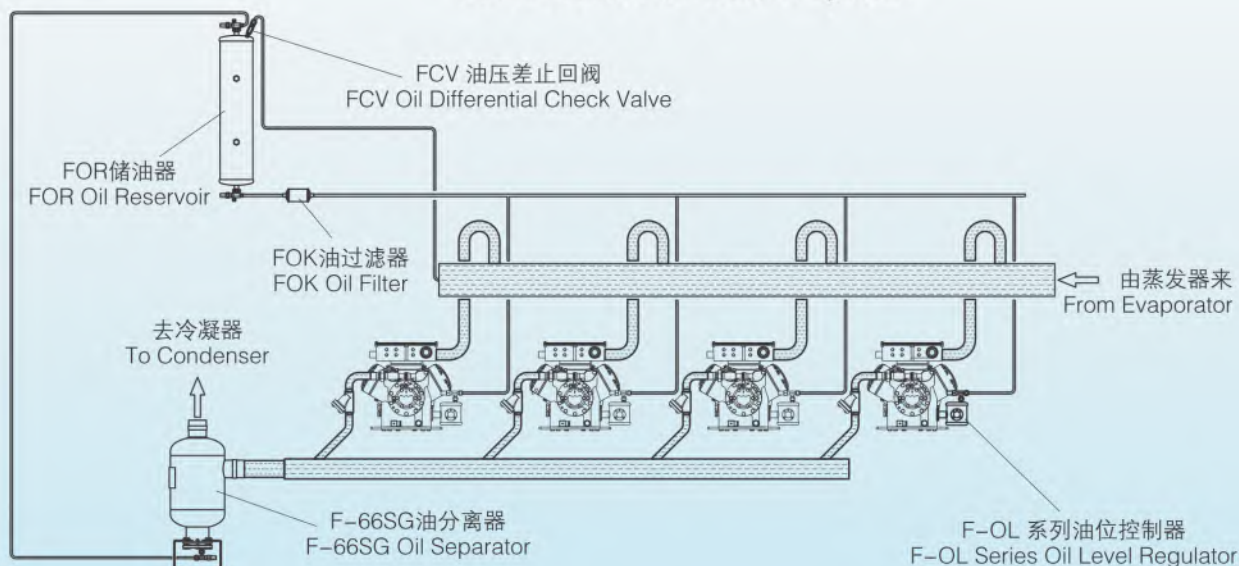

传统的方式以略高于吸气管路压力回油

The traditional method is that to feed the oil slightly higher than the suction line pressure

F-OL Series Oil Level Regulator F-OL系列油位控制器

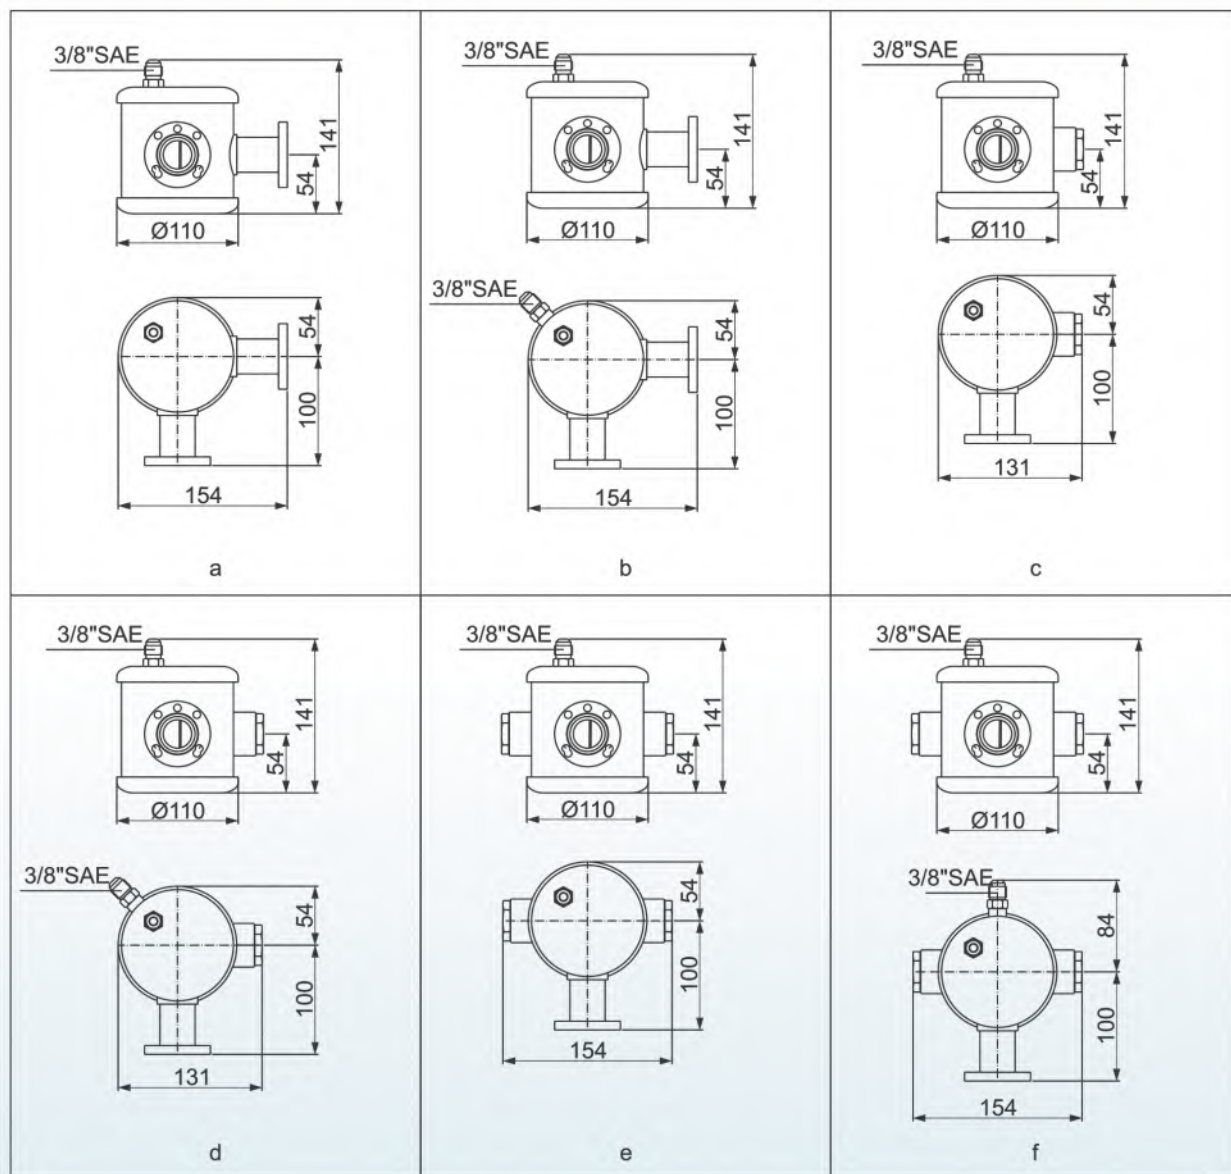

型号 Model	形式 Version	在视镜中的油位 Oil level in the sight glass	推荐工作压差 Recommended operating pressure difference (bar)	最大工作压差 Max.adm.working pressure difference (bar)	容积 Volume (l)	图例 Fig.
F-OLA-1	不可调节 unadjustable	中间 Center	1.38	4.0	0.8	a
F-OLA-2			1.38	4.0	0.8	b
F-OLB-1			1.38	4.0	0.8	c
F-OLB-2			1.38	4.0	0.8	d
F-OLC-1			1.38	4.0	0.8	e
F-OLC-2			1.38	4.0	0.8	f


FOT系列电子油位控制器通过浮子式油位开关检测压缩机油面高度,当压缩机油面降低后浮子式油位开关接通,供油电磁阀将润滑油送入压缩机,当压缩机油面升高后浮子式油位开关断开,供油电磁阀停止供油。

FOT系列电子油位控制器通过选择一个FSP2系列适配器可以方便地与任何品牌压缩机连接。

- 输入电压: 220V/AC/50Hz; ● 许可最高工作压力: 31 bar;
- 许可最高工作油温: 120°C; ● 油路电磁阀最高运行压差: 21 bar;
- 触点容量: 10A/220V/AC/50Hz; ● 油接口规格: 1/4"SAE;
- 适用制冷剂: R134a,R22,R407C,R404A,R507A。

3/4压缩机最高油位 →

1/4压缩机最低油位 →




FOT series electronic oil level controller detects the oil surface height of the compressor through the float oil level switch. When the compressor oil surface is reduced, the float oil level switch is connected, and the oil supply solenoid valve opens and sends the lubricating oil into the compressor. When the compressor oil surface rises, the float oil level switch is disconnected, and the oil supply solenoid valve stops the oil supply.


FOT series electronic oil level controller is easily connected to any brand compressor by selecting one of FSP2 series adapter.

- Input voltage: 220V/AC/50Hz. ● Maximum permit working pressure: 31bar.
- Maximum permit working oil temperature: 120°C. ● Maximum working pressure difference of the oil solenoid: 21bar.
- The relay contact: 10A/220V/AC/50Hz. ● Oil pipe joint size: 1/4"SAE.
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A.


涡旋并联机组 Scroll parallel unit

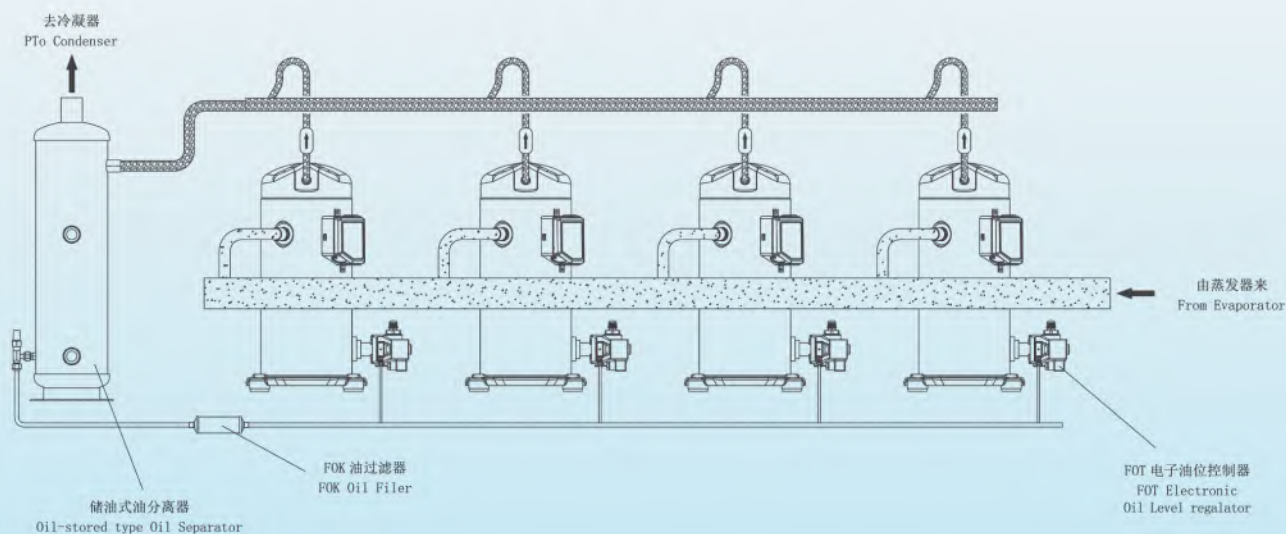


适配活塞式压缩机示意图

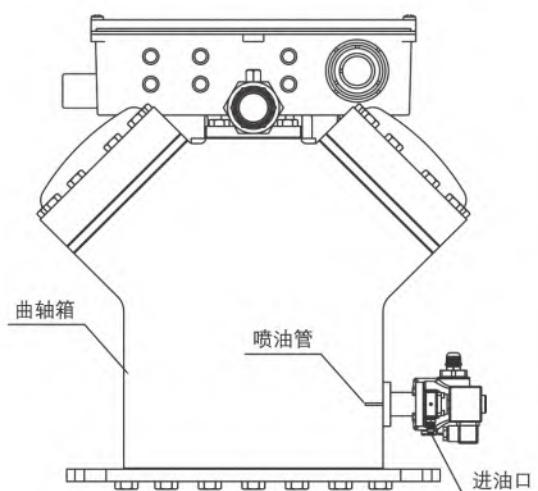


适配涡旋式压缩机示意图

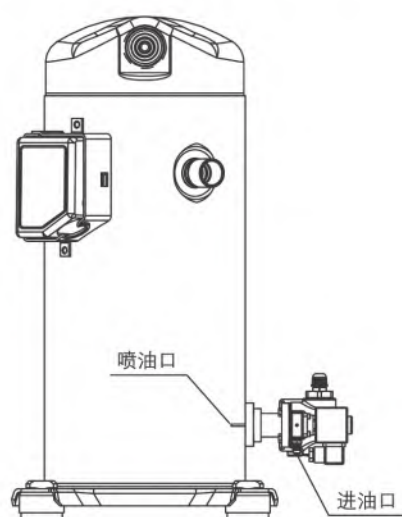

适配带内置油分离器螺杆式压缩机示意图

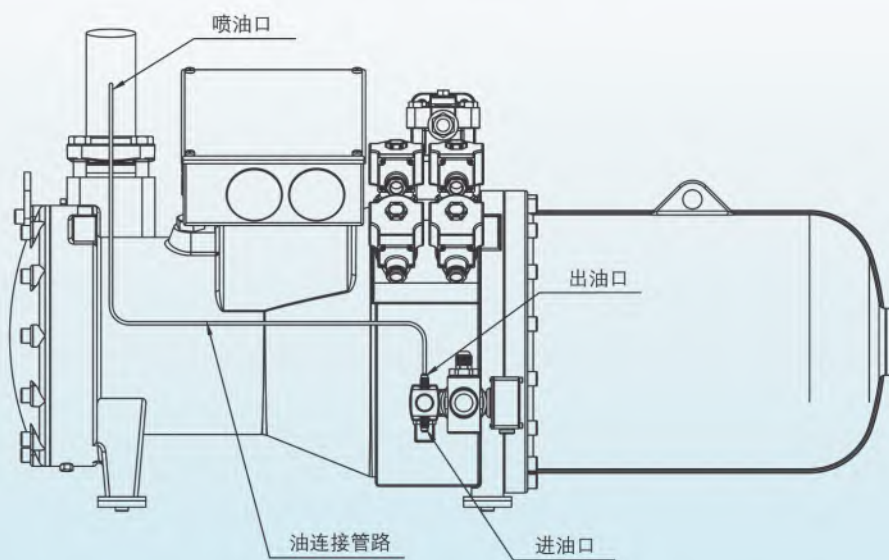

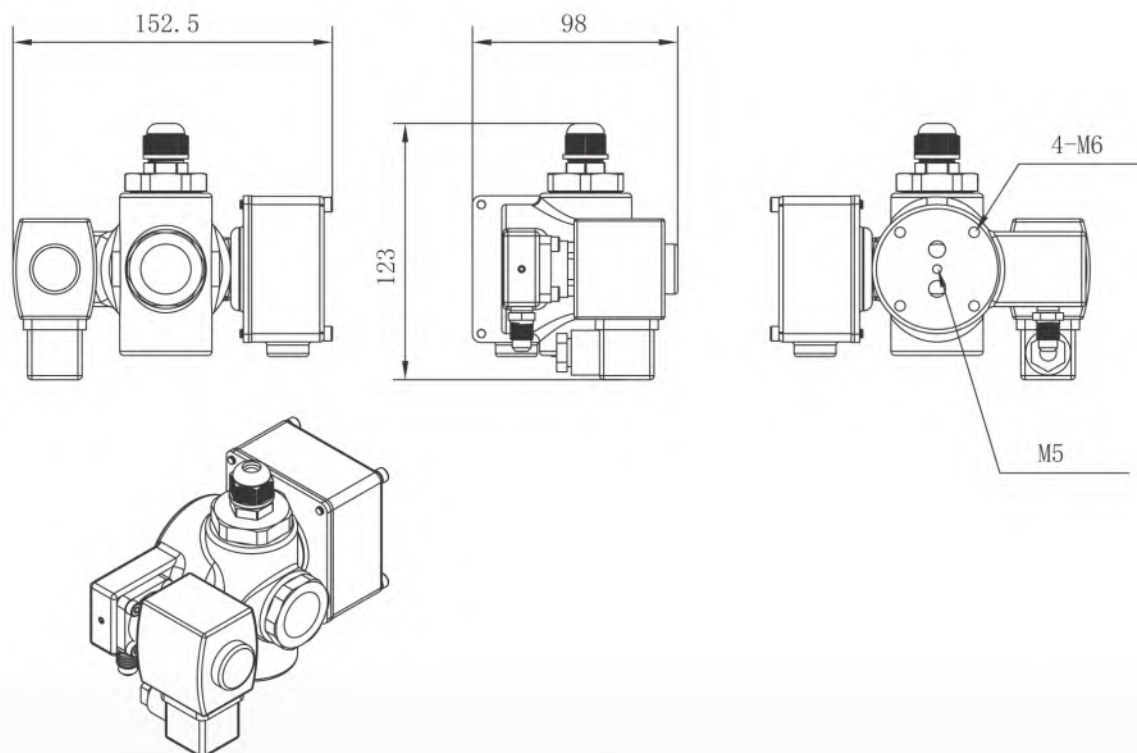

型号 Model	适用机型 Applicable compressor type	缺油报警延时 Oil level low alarm delay (s)	油位感应延时 Oil level detection delay (s)	供油周期 Oil supply cycle 开/停/On/Off (s)
FOT-01	活塞式压缩机 Piston compressor	120	3	10/10
FOT-02	涡旋式压缩机 Scroll compressor	120	3	5/10
FOT-22	带内置油分离器螺杆式压缩机 Screw compressor with built-in oil separator	180	5	50/10

★通过FSP2适配器可以方便地和各种压缩机视油镜连接, 用于监控压缩机油位。

★FOO浮子式油位开关必须水平安装, 否则会造成控制失灵。


- 输入电压: AC 220V ~ 240V±10% 50Hz 3VA
- 继电器触点: AC 240V 7A 300VA
- 使用环境温度: -30...70°C
- 介质温度: 最高+120°C
- 适用相对湿度: 10 ~ 95%RH (无冷凝)
- 最大许可运行压力: 3.1 Mpa
- 最小液体比重: 0.85
- 适用制冷剂: R134a, R22, R407C, R404A, R507A

3/4压缩机最高油位

3/4 maximum oil level

1/4压缩机最低油位

1/4 minimum oil level




FOO Series Floating-type Oil Level Switch of Compressor


★ It is easily connected to various compressor oil sight glasses via the FSP2 adapter to monitor the compressor oil level.



★ FOO floating-type oil level switch must be installed horizontally without causing control failure.

- Input voltage: AC 220V ~ 240V ± 10% 50Hz 3VA
- The relay contact: AC 240V 7A 300VA
- Use ambient temperature: -30...70°C
- Medium temperature: max. +120°C
- Applicable relative humidity: 10 ~ 95%RH (no condensation)
- Maximum permitted operating pressure: 3.1 Mpa
- Minimum liquid specific gravity: 0.85
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A

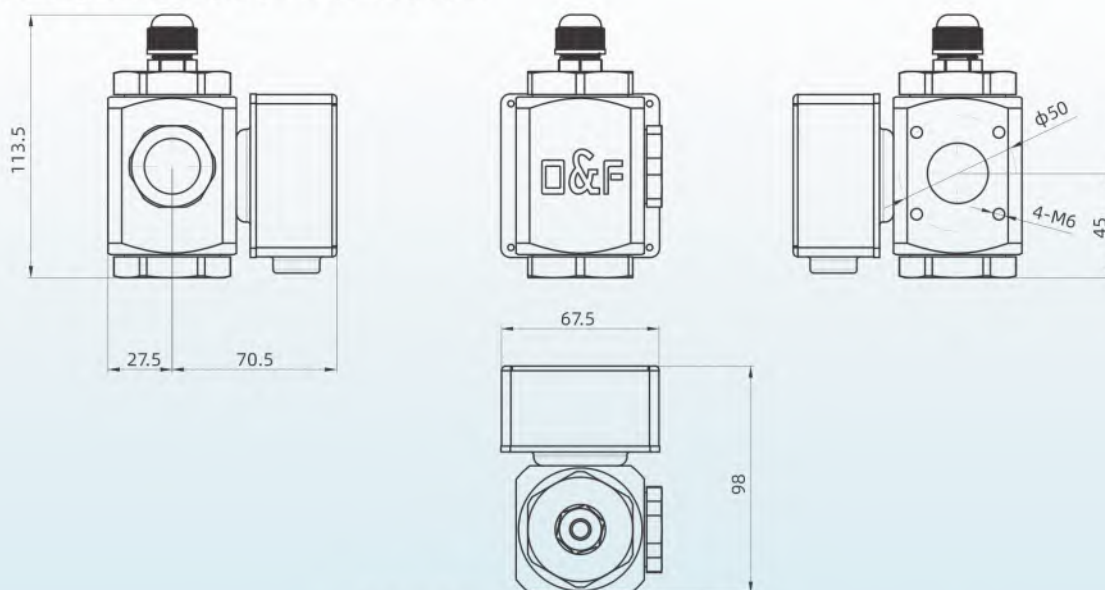

应用示意图 Application Diagram

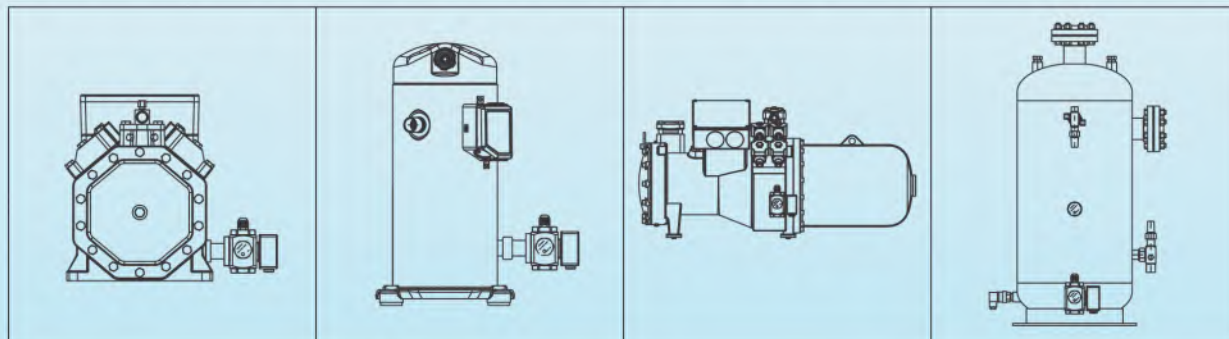

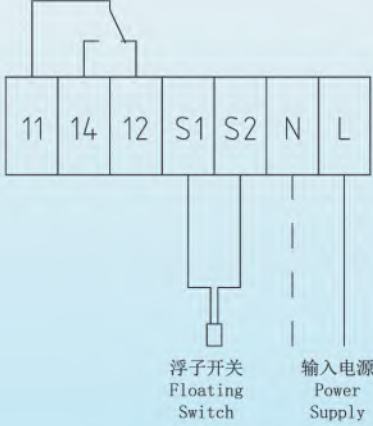FOO-01	
	上电后继电器吸合(11-14接通; 11-12断开), 绿色指示灯“亮”, 当压缩机油位低于视油镜1/4时, 延时60秒, 继电器断开(11-14断开; 11-12接通), 红色指示灯“亮”, 绿色指示灯“灭”。 在继电器断开期间, 当压缩机油位上升至视油镜1/4以上时, 延时3秒, 继电器吸合(11-14接通; 11-12断开)绿色指示灯“亮”。 After power-on, the relay is energized (11-14 close; 11-12 open), green LED "on", when the compressor oil level is below 1/4 of the oil sight glasses, delay 60 seconds, the relay is de-energized (11-14 open; 11-12 close), red LED "on" and green LED "off". During the relay de-energized, when the compressor oil level rises above 1/4 of the oil sight glasses, delay 3 seconds, the relay energized (11-14 close; 11-12 open) green LED "on".
FOO-11	
	上电后继电器吸合(11-14接通; 11-12断开), 绿色指示灯“亮”, 当压缩机油位低于视油镜1/2下方4mm后, 延时15秒, 继电器断开(11-14断开; 11-12接通), 红色指示灯“亮”, 绿色指示灯“灭”。 在继电器断开期间, 当压缩机油位上升至视油镜1/2时, 延时3秒, 继电器吸合(11-14接通; 11-12断开)绿色指示灯“亮”。 After power-on, the relay is energized (11-14 close; 11-12 open), green LED "on", when the compressor oil level is 4mm below 1/2 of the oil sight glasses, delay 15 seconds, relay is de-energized (11-14 open; 11-12 close), red LED "on", and green LED "off". During the relay de-energized, when the compressor oil level rises to 1/2 of the oil sight glasses, delay 3 seconds, the relay energized (11- 14 close; 11-12 open) green LED "on".
FOO接线图/wiring diagram	
 浮子开关 Floating Switch 输入电源 Power Supply	

FCV Series Oil Differential Check Valve FCV系列油压差止回阀


油压差止回阀一端安装在FOR储油器上部的3/8" SAE接头上。为了使回油有足够的流速，在储油器与压缩机曲轴箱之间必须有一定的压差。这个压差一定要受到控制。

- 在单级压缩的装置上，FCV要装在储油器和吸气管之间；
- 在双级压缩的装置上，FCV要装在储油器和中间压力管之间。

The one side of oil differential check valve is installed on the 3/8" SAE adapter of oil reservoir. There must be some differential pressure between the oil reservoir and the crankcase of compressor in order to have enough velocity of flow when oil is returned. The differential pressure should be controlled.

- The FCV should be installed between the oil reservoir and suction line in the single-stage compressed vessel;
- The FCV should be installed between the oil reservoir and middle pressure pipe in the dual-stage compressed vessel.


型号 Model	工作压差Operating Difference Press.	
FCV-05	5psi	0.34 bar
FCV-10	10 psi	0.69 bar
FCV-20	20 psi	1.38 bar
FCV-30	30 psi	2.07 bar



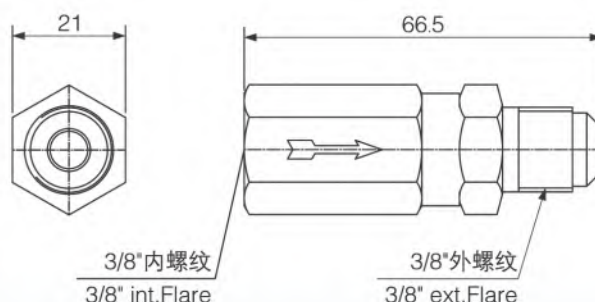





FHQ平衡器 FHQ Balancer




FHQ平衡器带有一个3/8" SAE接头，它可以使不带平衡接口的油位控制器相互连通（平衡），用很少的成本解决多机并联制冷系统中经常出现的油位不平衡的问题。

The 3/8" SAE adapter on the FHQ Balancer is connected mutually between the oil level regulators without the balanced connection. It uses the less cost to settle the unbalanced problems of oil level in the multiple-machine parallel refrigeration system.

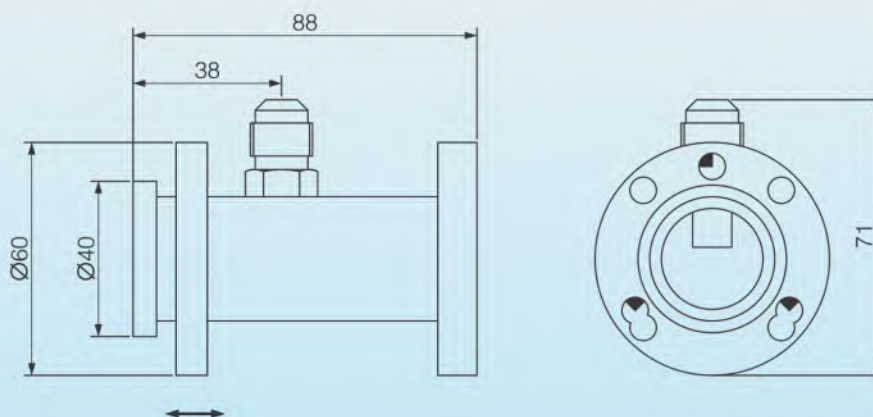

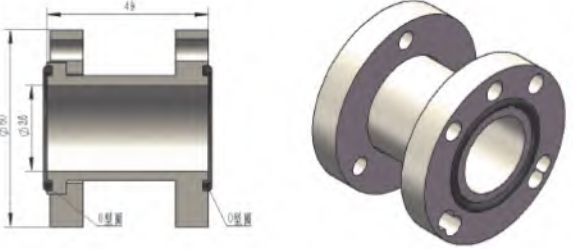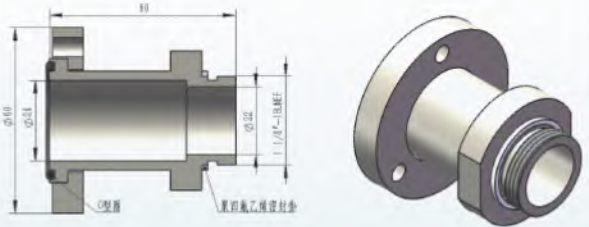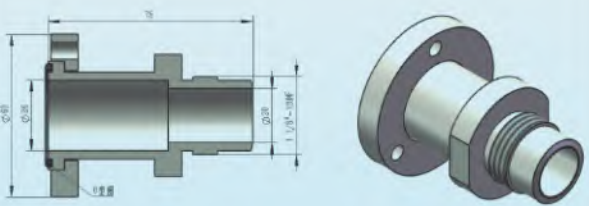	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-01	1、比泽尔(BITZER): 4VE,4TE,4PE,4NE,4JE,4HE,4GE,4FE, 6JE,6HE,6GE,6FE,8GE,8FE 2、莱富康(REFCOMP): SP4H,SP4L,SP6H,SP6L,SP8H,SP8L 3、谷轮(COPELAND):C系列, 3S,4S,6S,4M,6M 4、富士豪(FAASCOLD):A,B,D,Q,S,V,Z,W 5、基伊埃(GEA): HG44e,HG56,HG66e,HG88e 6、都灵(DORIN):H35,H41,H6,H7
	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-02	1、比泽尔(BITZER): 2KE, 2JE, 2HE, 2GE, 2FE, 2EE,2DE,2CE, 4FE,4EE,4DE,4CE,4BE 2、莱富康(REFCOMP):SP2H, HP2L, 3、丹佛斯(DANFOSS):MT,LT 4、基伊埃(GEA):HE22e, HE34e 5、都灵(DORIN):H11,H2,H33,H35
	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-03	1、谷轮(DWM COPELAND): DK,DL,DN 2、谷轮(COPELAND):E,K,L,N

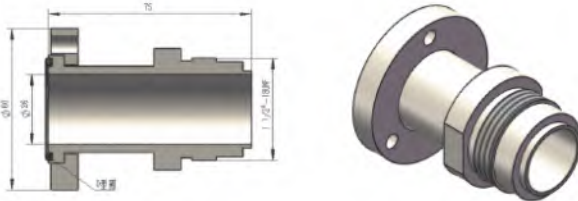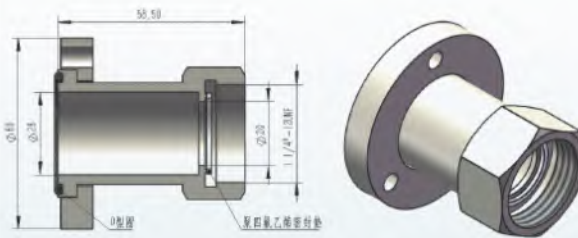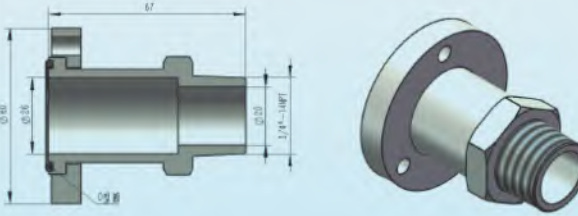	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-04	1、开利(CARRIER): DA, DR, 5F, 5H, 6D, 6E 2、三洋/松下(SANYO/ PANASONIC): 10HP, 15HP
	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-05	艾默生(EMERSON): ZB15~ZB48, ZB50, ZB58, ZB66, ZB 76, ZB95, ZB114, ZBD21~ZBD45 ZF06~ZF49, ZFI20~ZFI68, ZSI06 ~ZSI21
	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-06	艾默生(EMERSON): ZB15K~ZB92K, ZS15K~ZS92K, Z F09K ~ZF48K

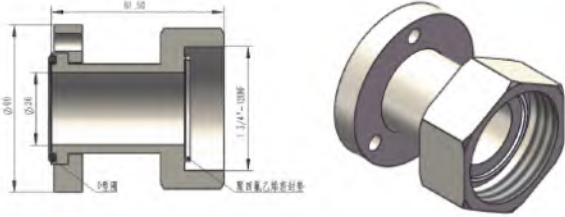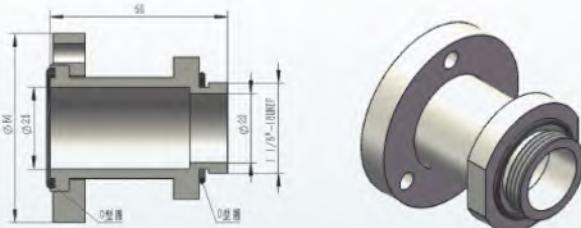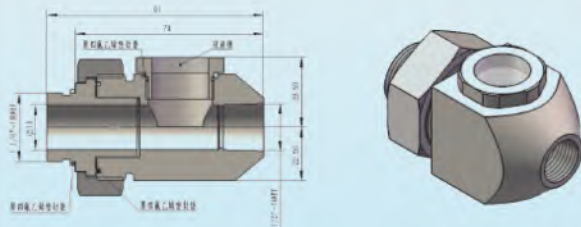	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-07	艾默生(EMERSON): ZB130,ZB150, ZB190, ZB220, ZR9 OK~ZR19M
	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-08	丹佛斯(DANFOSS):MLM,MLZ
	型号 Model	适配压缩机 Can be used for the compressor
	FSP2-09	欧达法斯克(O&F)容器液位/油 位检测


F-S Series Cut-off Valve of Oil Circuit F-S系列油路截止阀

F-S系列油路截止阀可安装在油分离器回油接头、油位控制器回油接头和油位控制器油平衡接头上, 还可以安装在FHQ平衡器和FOK油过滤器上。

系统需要维修时, F-S阀可以隔离任意一段油管路, 使其他压缩机能够正常工作。每个F-S阀都设计了可以360°旋转的接口, 可方便的安装在油管路上。

F-S Series cut-off valve of oil circuit can be assembled to the oil return adapter of oil separator and oil level regulator, and it also can be assembled to the oil equalizing adapter of the oil level regulator, and can be assembled to the FHQ balancer and the FOK oil filter.

F-S Series cut-off valve can separate any one group oil pipeline when the system requires the maintenance in order to make other compressors normally work. It has a connection which can rotate with 360°, so it can be assembled into the oil circuit conveniently.

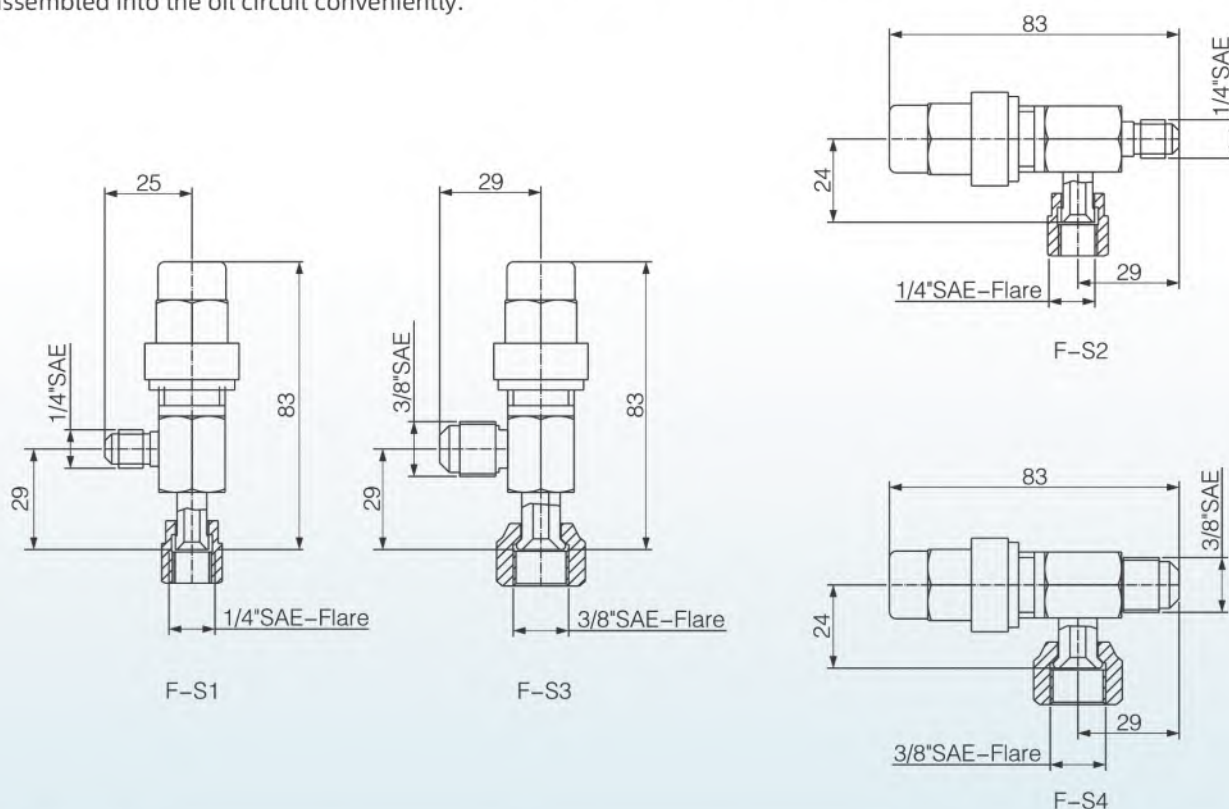


型号 Model	A	B	安装方式 Installation method
F-S1	1/4"SAE阳接头 1/4"SAE male adapter	1/4"SAE阴接头 1/4"SAE female adapter	立式Vertical
F-S2	1/4"SAE阴接头 1/4"SAE female adapter	1/4"SAE阳接头 1/4"SAE male adapter	卧式Horizontal
F-S3	3/8"SAE阳接头 3/8"SAE male adapter	3/8"SAE阴接头 3/8"SAE female adapter	立式Vertical
F-S4	3/8"SAE阴接头 3/8"SAE female adapter	3/8"SAE阳接头 3/8"SAE male adapter	卧式Horizontal

F-T系列检修阀安装在制冷压缩机组吸气管路、排气管路和油管路上，通过它可以方便的检测每一段管道的压力。截止阀标配一个可以焊接在管路上的钢制NPT阀座（阴螺纹接头）。

F-T系列检修阀可以为检修压力表、压力控制器、压力传感器等元件提供方便，同时可以在维修设备时连接真空泵。

F-T Series Service Valve can be assembled in the suction line and the discharge line and the oil line of the refrigeration compressor unit. You can inspect the pressure of each section of the line conveniently by using this valve. And there is a steel NPT valve seat (female thread adapter) to this valve.

F-T Series Service Valve can supply the maintenance service to the manometer and the pressure controller and the pressure sensor conveniently, and at the same time it can be connected with the vacuum pump during maintenance the equipment.

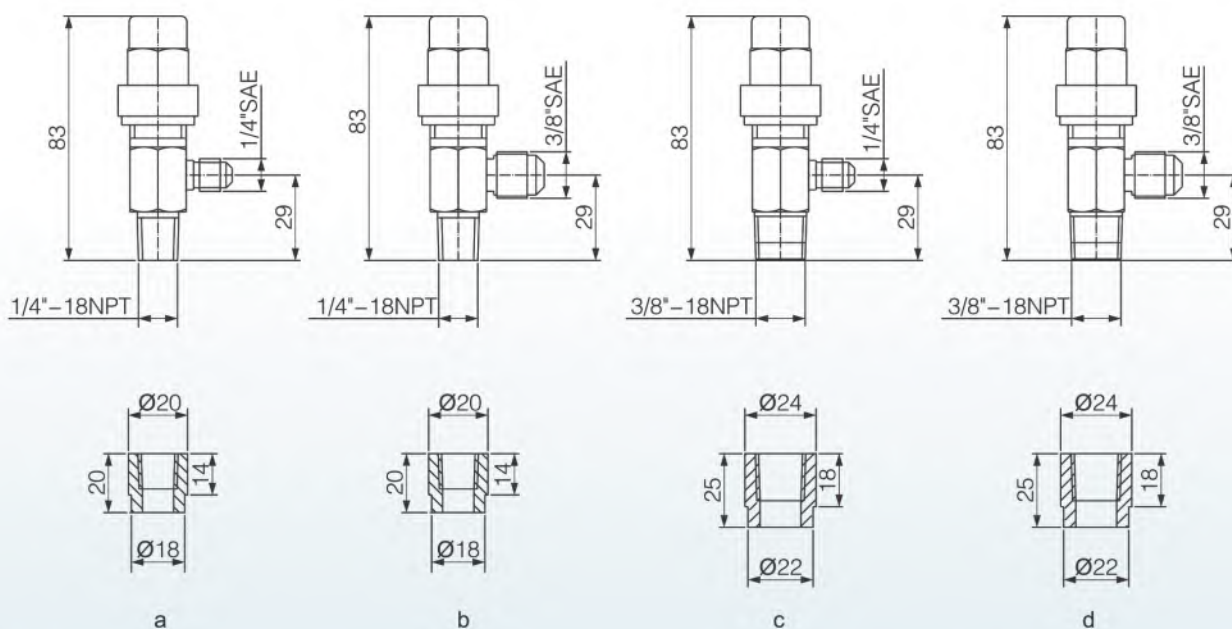

型号 Model	A	B	图例 Fig.
F-T1	1/4"SAE	1/4"-18NPT	a
F-T2	3/8"SAE	1/4"-18NPT	b
F-T3	1/4"SAE	3/8"-18NPT	c
F-T4	3/8"SAE	3/8"-18NPT	d

FYW Series Liquid Level Meter FYW系列液位计

FYW系列液位计壳体使用坚固的无缝钢管制作，装有带红色浮球的视镜，每一个视镜之间的距离为120mm。液位计上部和下部各装有一个检修阀。


通过管路将液位计上接口和下接口与容器气相截止阀和液相截止阀连接，液位计可准确的显示容器内液面的位置。

- 最大许可工作压力：31bar；
- 许可工作温度：+90°C~-40°C；
- 适用制冷剂：R134a、R22、R407C、R404A、R507A。

The shell body of FYW Series Liquid Level Meter is made by solid seamless steel tube, it is equipped with sight glass who has red floating ball inside. The distance between each sight glass is 120 mm, It is installed with service valves on the top and bottom of it.

Connecting the top conn. and bottom conn. to the gas cut-off valve and liquid cut-off valve of the vessel product through by the pipeline. It will show you the accurate liquid level position inside of the vessel product.


- The max. admissible operating pressure: 31bar;
- Admissible working temperature: +90°C~-40°C;
- Applicable refrigerants: R134a、R22、R407C、R404A、R507A.

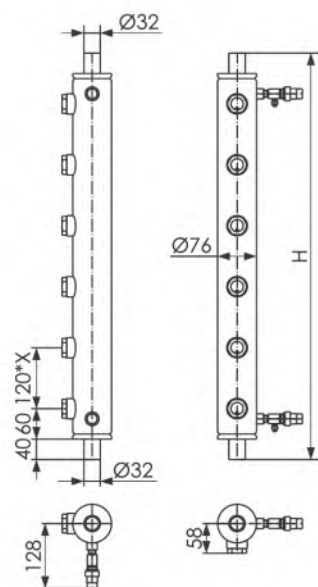

型号 Model	FYW-04(F50)	FYW-06(F50)	FYW-08(F50)	FYW-10(F50)	FYW-12(F50)	FYW-14(F50)	FYW-16(F50)
H(mm)	560	800	1040	1280	1520	1760	2000


备注：型号中带有(F50)的产品上安装的是带防霜保护的视镜，用于存储低温制冷剂容器。

Remark: The product whose model with F50 is assembled with frost protection sight glass, it can be used for the vessel who uses the low temperature refrigerants.

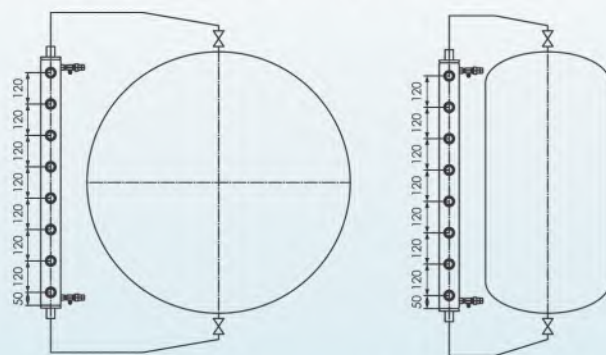


卧式容器 Horizontal Vessel


立式容器 Vertical Vessel

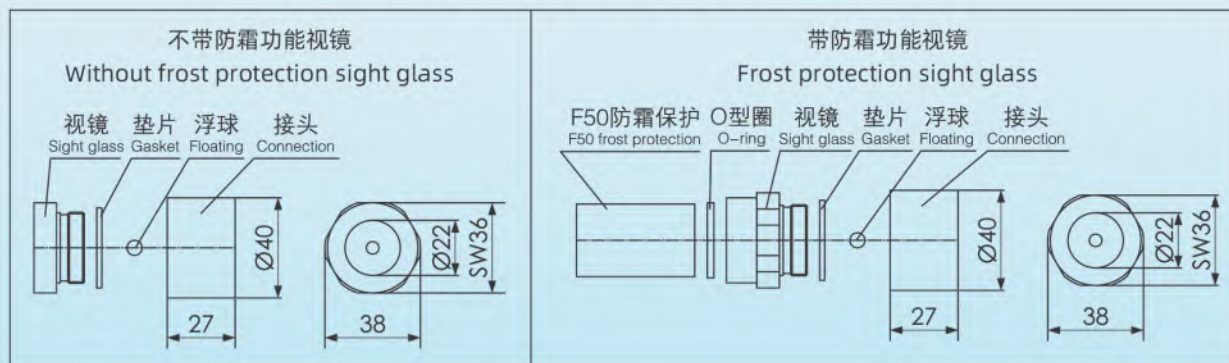

装设气液分离器的二种形式

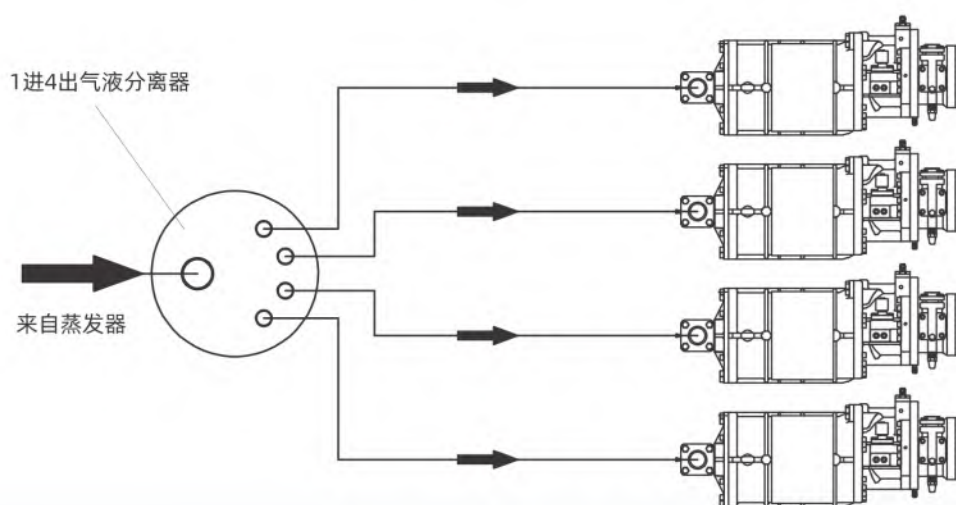

最佳设计

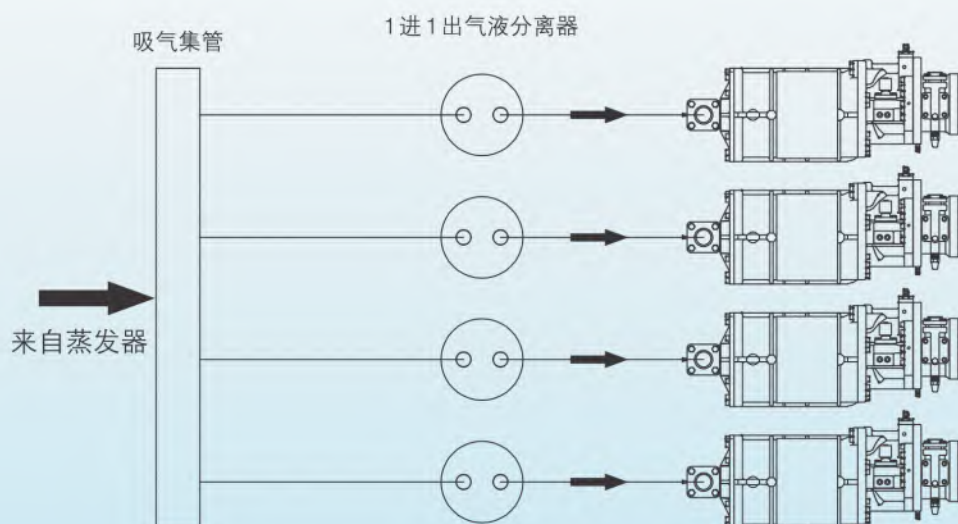

一般设计

在制冷装置中安装气液分离器是用于避免在蒸发器中没有过热的制冷剂蒸汽进入压缩机，导致压缩机湿压缩（液击）。导致压缩机发生湿压缩（液击）的原因有：

- 管路安装不当； ● 蒸发器容量不足； ● 膨胀阀选型错误； ● 制冷剂充注量过大；
- 蒸发器结霜过厚； ● 蒸发器风机不运转； ● 吸气管绝热不够且环境温度很低；

对于合理选择气液分离器，以下几点必须注意；

- 1、强烈推荐在蒸发温度低于 -15°C 的制冷装置中请选择回热型气液分离器；
- 2、气液分离器U型垂直上升管内流速不得小于 7.5 m/s ，以保证良好的回油；
- 3、气液分离器U型垂直上升管内流速不得大于 12 m/s ，避免出现不合理的压损，特别是低蒸发温度系统；
- 4、制冷机组若采用容量控制，应考虑U型垂直上升管内流速始终处在 $7.5\sim 12\text{ m/s}$ 之间；
- 5、对于并联压缩机组，请选择多吸气管气液分离器（若需要可与O&F技术部联系）。每根吸气管对应一台压缩机，以保证每一台压缩机都能获得一个相同的流速。
- 6、安装方法：垂直安装
- 7、安装气液分离器须尽量靠近压缩机的吸气口



Installing accumulator in the refrigeration system can prevent the refrigerants in the evaporator which is without overheating entering into the compressor. It will avoid wet compression of the compressor (Slugging).

The causes which will lead to wet compression of compressor (Slugging) as below:


- Wrong installation of the pipe line; ● Insufficient capacity in the evaporator;
- Wrong model selection to the expansion valve; ● Overfull charging volume of refrigerant;
- Too thick frost on the evaporator; ● The fan of the evaporator doesn't work;
- Inadequate insulation to the suction pipe and the ambient temperature is too low;

Be attention to these items when you model selection the accumulator:

- 1、It is strongly recommended to use the accumulator who has heating function when the evaporating temperature is lower than -15°C .
- 2、The flow speed inside of the vertical uplifted U tube of the accumulator can not be lower than 7.5 m/s , which will guarantee the perfect oil return.
- 3、The flow speed inside of the vertical uplifted U tube of the accumulator can not be higher than 12 m/s , which will avoid unreasonable pressure lost, especially to the low-evaporating temperature system.
- 4、If the refrigeration unit took volume control, the flow speed inside of the vertical uplifted U tube of the accumulator shall kept to be $7.5\sim 12\text{ m/s}$.
- 5、To the parallel unit, we recommend to use the accumulator with many suction pipes (if needed please contact with O&F technology department). Each suction pipe will be connected to one piece of compressor, which will guarantee each piece of compressor can get the same flow speed.
- 6、Installation method: Vertical installation.
- 7、Do please install the accumulator as close to the suction connection of the compressor as possible.

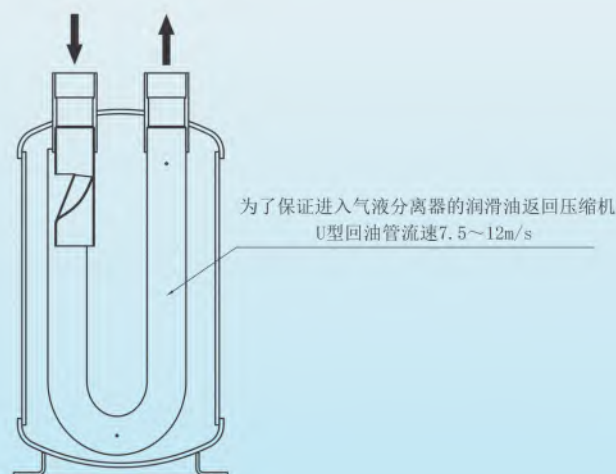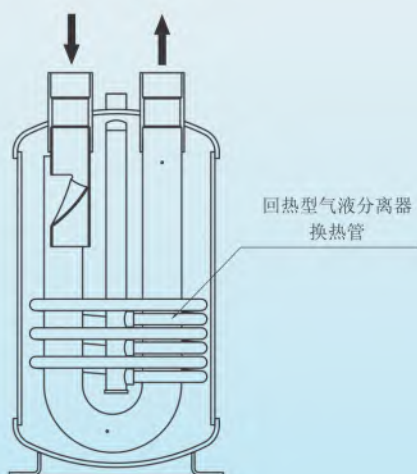


- 安装方法: 垂直安装
 - 安装气液分离器须尽量靠近压缩机的吸气口
 - 最大许可运行压力: 2.5 MPa
 - 适用制冷剂: R134a, R22, R407C, R404A, R507A, R410A
-
- Installation method: vertical installation.
 - The accumulator shall be installed as close as possible to the suction valve of the compressor.
 - Maximum permit working pressure: 2.5 MPa.
 - Applicable refrigerant: R134a, R22, R407C, R404A, R507A, R410A.

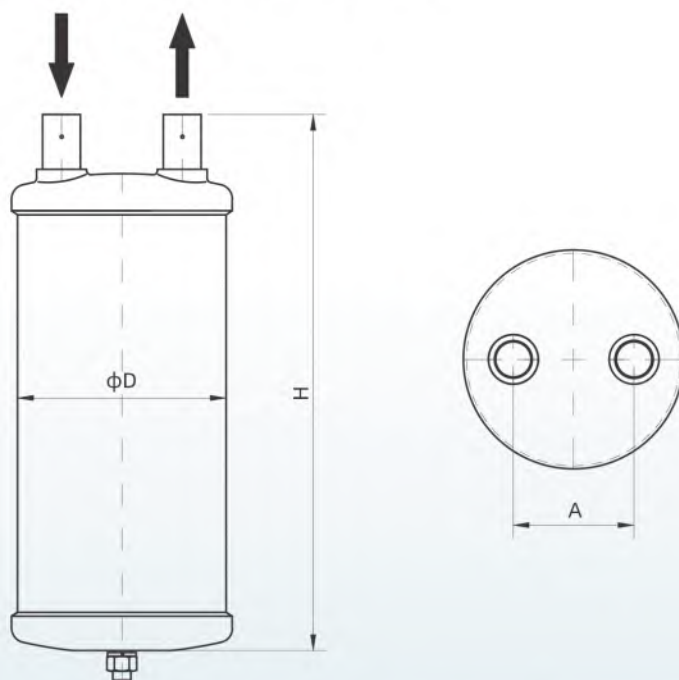


型号 Model	接口尺寸 Joint Size (Inch)	ϕD (mm)	H (mm)	A (mm)	容积 Volume (l)
FA-204DT	1/2"	102	250	54	1.6
FA-205DT	5/8"	102	316	54	2.0
FA-206DT	3/4"	140	302	80	3.3
FA-207DT	7/8"	140	362	81	4.2
FA-208DT	1-1/8"	165	455	79	7.3
FA-209DT	1-3/8"	165	590	84	9.9
FA-210DT	1-5/8"	165	645	82	10.8

- 气液分离器安装采用稳定的裙座式设计;
 - 进出口为坚固的碳钢接口;
 - 设计压力: 2.5MPa;
 - 适用制冷剂: R134a,R22,R407C,R404A,R507A, R410A;
-
- The installation base of the accumulator is skirt-structure design;
 - The inlet and outlet are made by stable carbon steel;
 - Design pressure:2.5 MPa;
 - Applicable refrigerant: R134a, R22, R407C, R404A, R507A,R410A;

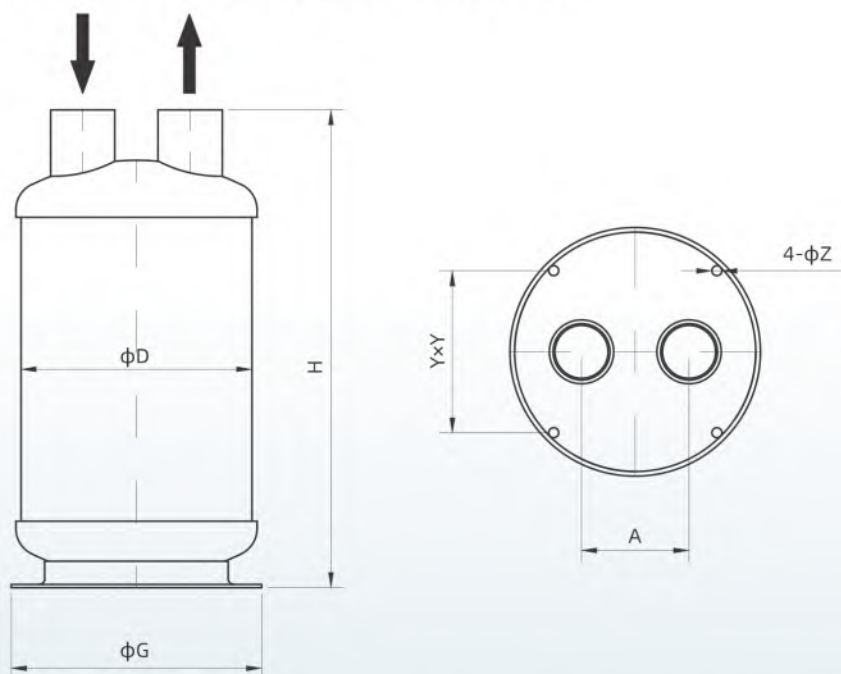


型号 Model	ODS接口 铜管 ODS Conn.copper tube (Inch)	对焊接口 钢管 Butt-jointed steel tube (mm)	ϕD (mm)	H (mm)	A (mm)	ϕG (mm)	Y (mm)	ϕZ (mm)	容积 Volume (l)
FA2-204	1/2"	----	102	263	54	140	86	8.5	1.6
FA2-205	5/8"	----	102	338	54	140	86	8.5	2.0
FA2-206	3/4"	----	140	344	80	160	96	9.0	4.0
FA2-207	7/8"	$\phi 25 \times 2.5$	140	414	81	160	96	9.0	5.0
FA2-208	1-1/8"	$\phi 32 \times 3.0$	165	486	79	190	120	9.0	8.0
FA2-209	1-3/8"	$\phi 38 \times 3.0$	165	601	83	190	120	9.0	10.0
FA2-210	1-5/8"	$\phi 45 \times 3.0$	219	552	110	250	155	12	16.0
FA2-221	2-1/8"	$\phi 57 \times 3.5$	273	560	127	296	193	12	24.0
FA2-225	2-5/8"	$\phi 76 \times 4.0$	273	669	127	296	193	12	29.5

- FA2-231,FA2-234气液分离器安装采用稳定的裙座式设计;
- FA2-242,FA2-250,FA2-269气液分离器安装采用轻便的支承式支腿设计;
- 设计了排污口,可方便地把进入气液分离器内的脏物排出;
- 进出口为坚固的碳钢接口;
- FA2-231,FA2-234,FA2-242设计压力: 2.5MPa;
- FA2-250,FA2-269设计压力: 2.2MPa;
- 适用制冷剂: 适用制冷剂: R134a,R22,R407C,R404A,R507A, R410A;
- The installation base of FA2-231 and FA2-234 is stable skirt-structure design;
- The installation method of FA2-242, FA2-250 and FA2-269 is portable supporting landing legs;
- It is designed with drain outlet with which the dirty impurities can be discharged out from the accumulator expediently ;
- The inlet and outlet are made by stable carbon steel;
- FA2-231,FA2-234,FA2-242 Design pressure:2.5MPa;
- FA2-250,FA2-269 Design pressure:2.2MPa;
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A,R410A;

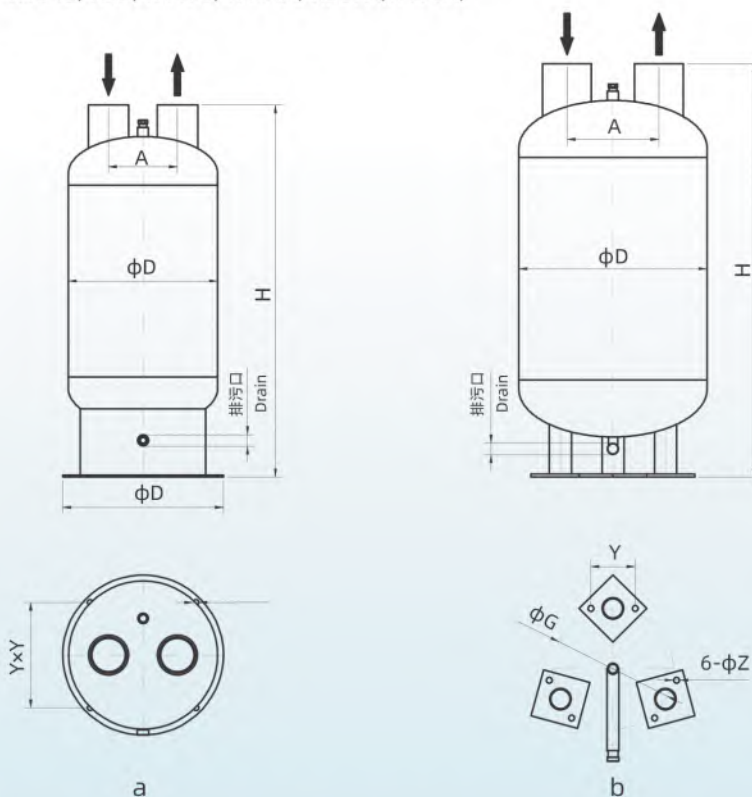



型号 Model	对焊接口 钢管 Butt-jointed steel tube (mm)	φD (mm)	H (mm)	A (mm)	φG (mm)	Y (mm)	φZ (mm)	容积 Volume (l)	安全阀接口 Conn.for Safety valve	图例 Fig.
FA2-231	φ89×4.0 BW	325	814	150	350	230	13	43.0	3/8"NPT	a
FA2-234	φ108×4.0 BW	412	907	190	440	290	14	80.0	1/2"NPT	a
FA2-242	φ133×4.0 BW	512	1129	250	330	120	20	162.0	1/2"NPT	b
FA2-250	φ159×4.5 BW	712	1642	320	460	135	20	450.0	1/2"NPT	b
FA2-269	φ219×6.0 BW	916	1906	420	580	160	20	890.0	3/4"NPT	b

- 气液分离器安装采用稳定的支座式设计;
 - 进出口为坚固的碳钢接口;
 - 产品上设计了排污口, 可以便捷排来自蒸发器和回气管道中不良杂质;
 - 最大许可工作压力: 2.5MPa;
 - 适用制冷剂: R134a,R22,R407C,R404A,R507A,R410A;
-
- This accumulator with a stable support pedestal design for installation;
 - The inlet and outlet are made by strong carbon steel;
 - With the dirt drain outlet, which can easily drain dirt and bad impurities coming from the evaporator and gas return line;
 - Maximum allowable working pressure:2.5 MPa;
 - Applicable refrigerant: R134a, R22, R407C, R404A, R507A, R410A;

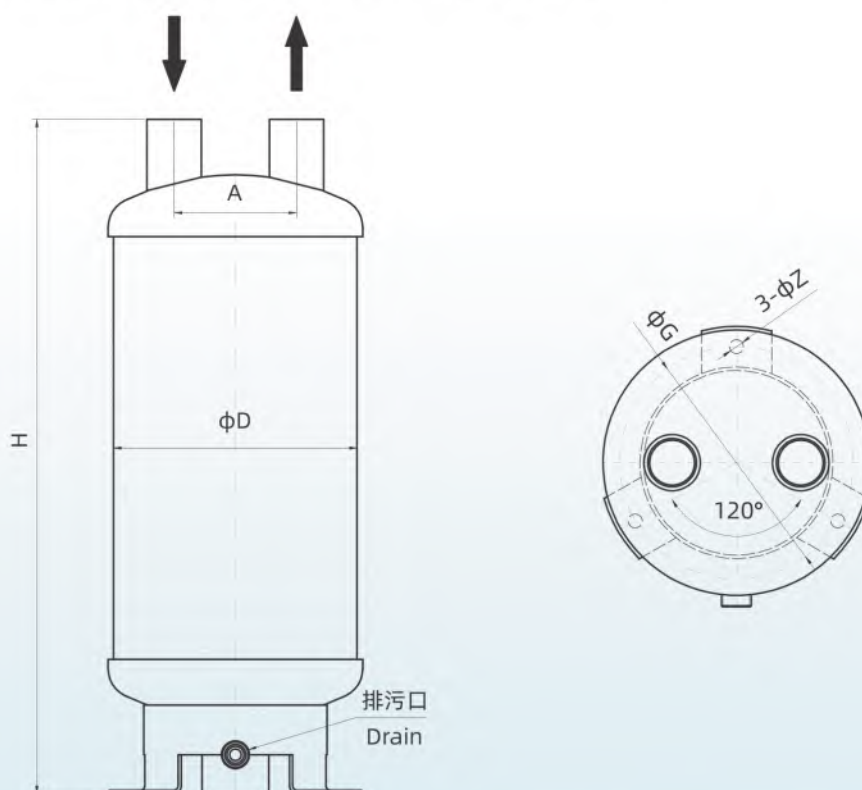

型号 Model	接口尺寸 Joint Size (Inch)	φD (mm)	H (mm)	A (mm)	φG (mm)	φZ (mm)	容积 Volume (l)	排污口 Drain Outlet
FAB-207	7/8"	140	475	81	150	9.0	5.0	1"-14UNS
FAB-208	1-1/8"	165	534	79	175	9.0	8.0	1"-14UNS
FAB-209	1-3/8"	165	649	83	175	9.0	10.0	1"-14UNS
FAB-210	1-5/8"	219	610	110	200	12.0	16.0	1"-14UNS
FAB-221	2-1/8"	273	612	127	255	12.0	24.0	1"-14UNS
FAB-225	2-5/8"	273	722	127	255	12.0	29.0	1"-14UNS

回热器的安装

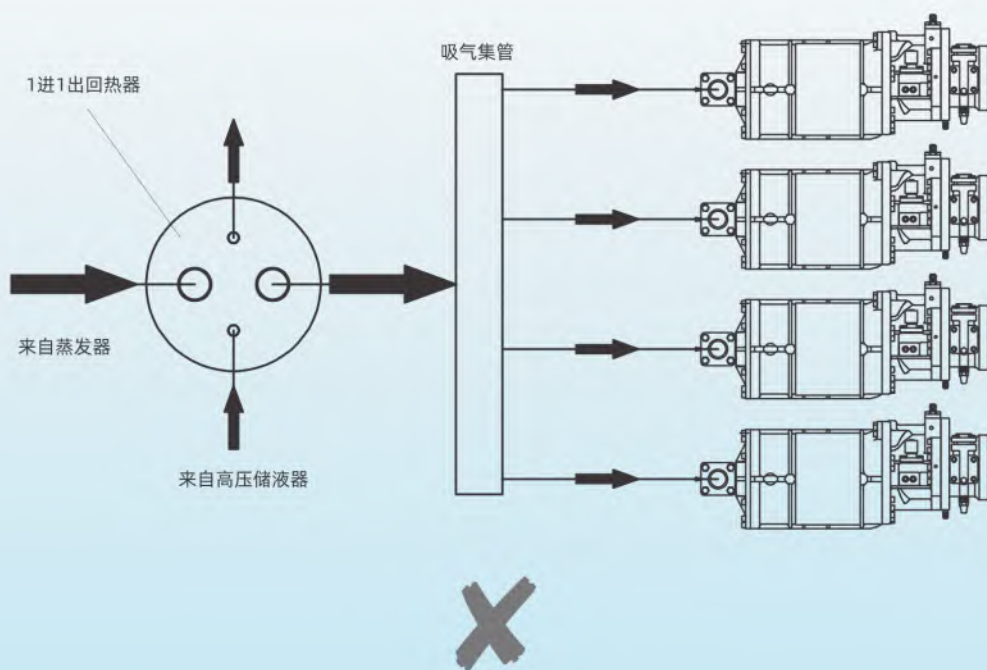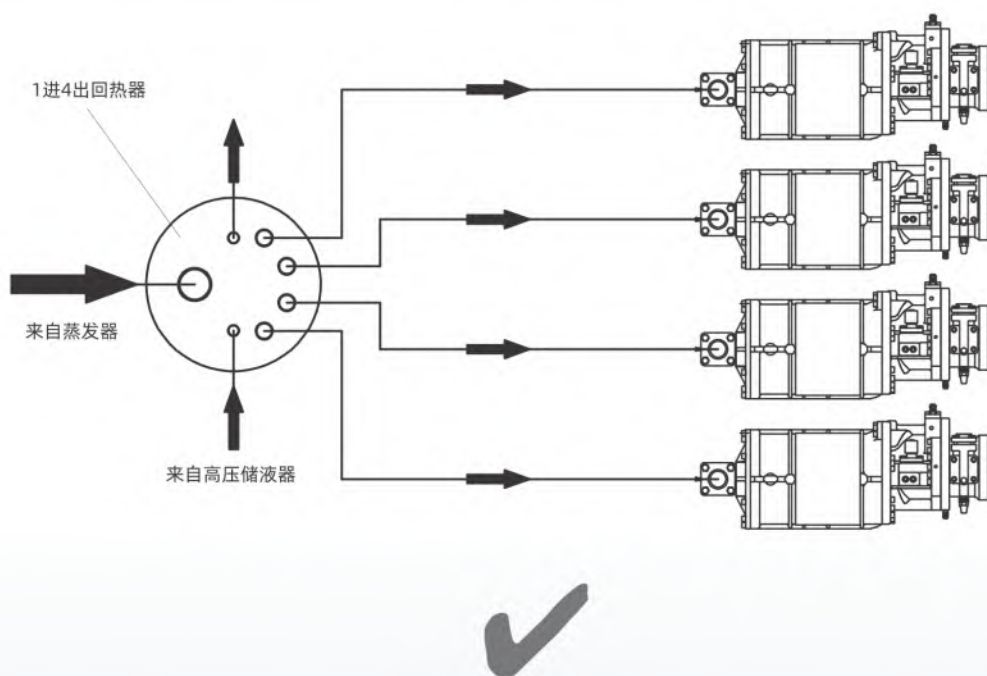

FAV-G Series Accumulator with heat exchanger FAV-G系列回热型气液分离器



FAV-G系列回热型气液分离器换热管采用304高效螺纹管,具有强大的冷热交换能力。独特的U形管和回油孔设计,既保证了良好的回油效果,又可有效地避免液体制冷剂进入压缩机吸气管。

- 安装方法: 垂直安装
- 过冷后的供液管需要进行保温
- 气管最大许可运行压力: 2.5MPa
- 液管最大许可运行压力: 4.1MPa
- 适用制冷剂: R134a, R22, R407C, R404A, R507A, R410A

The heat exchange pipe of FAV-G series accumulator adopts SUS304 stainless steel high-efficiency threaded pipe, which has strong heat exchange ability. The unique U-shaped tube and oil return hole design, not only to ensure the good oil return effect, but also to avoid effectively the liquid refrigerant into the compressor suction pipe.

Installation method: vertical installation.


- The liquid pipe after subcooling needs to be insulated.
- Maximum permit working pressure of suction pipe: 2.5MPa.
- Maximum permit working pressure of liquid pipe: 4.1MPa.
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A, R410A.
-

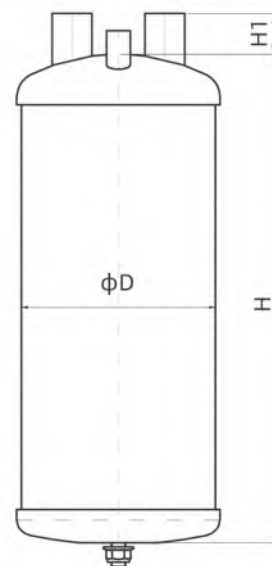

型号 Model	气管 Suction Pi (Inch)	液管 Liquid Pi (Inch)	φD (mm)	H (mm)	H1 (mm)	A (mm)	B (mm)	容积 Volume (l)
FAV-2404G	1/2"	3/8"	102	215	35	53	60	1.5
FAV-2405G	5/8"	3/8"	102	286	30	54	60	2.0
FAV-2406G	3/4"	1/2"	140	274	30	80	69	3.3
FAV-2407G	7/8"	1/2"	140	334	33	81	69	4.2
FAV-2411G	1-1/8"	5/8"	165	419	35	79	95	7.3
FAV-2413G	1-3/8"	3/4"	165	549	40	83	110	9.9
FAV-2415G	1-5/8"	7/8"	165	599	40	90	110	10.8


- FAS系列回热型气液分离器是一款专门为冷库制冷系统设计的产品;
- 利用回气管路中低温制冷剂蒸汽给供液过冷, 可有效地避免膨胀阀前出现闪发气体;
- 过冷后的供液管需要进行保温;
- 利用供液热量使气液分离器内制冷剂蒸汽合理过热, 避免压缩机液击;
- 产品上设计了排污口, 可以便捷排出来自蒸发器和回气管道中不良杂质;
- 气管最大许可工作压力: 2.5MPa;
- 液管最大许可工作压力: 3.1MPa;
- 适用制冷剂: R134a, R22, R407C, R404A, R507A。

- FAS series gas-liquid separator with heat exchanger is a product specially designed for the cold storage refrigeration system.
- Use low temperature refrigerant vapor in the gas return line to subcool the supply liquid, it can effectively avoid the flash gas before the expansion valve.
- Subcooled liquid supply pipes need to be insulated.
- Use the supply liquid refrigerant to warm the return gas with a reasonable superheat and to protect the compressor from slugging with liquid.
- With the dirt drain outlet, which can easily drain dirt and bad impurities coming from the evaporator and gas return line;
- Maximum allowable working pressure of gas side: 2.5MPa;
- Maximum allowable working pressure of liquid side: 3.1MPa;
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A;

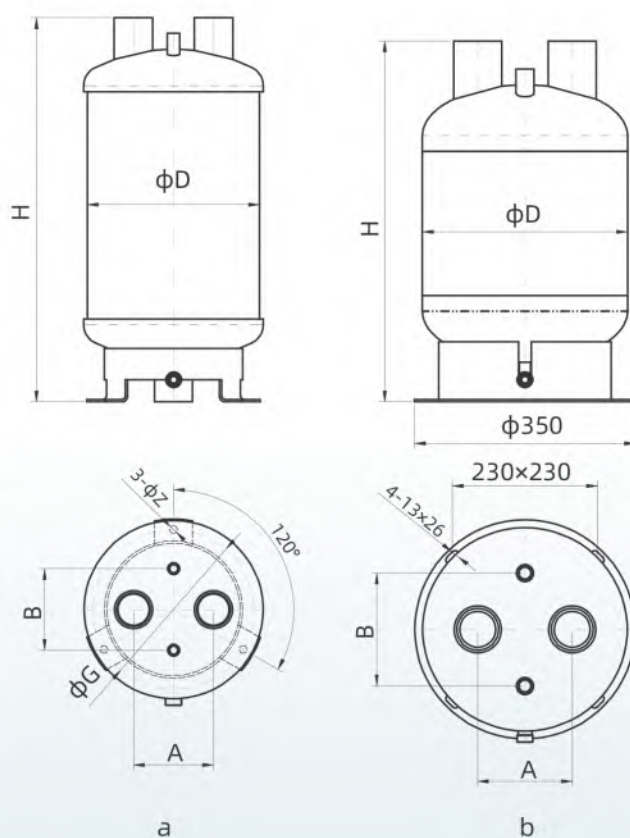


型号 Model	气管 Suction Pipe	液管 Liquid Pipe	φD (mm)	H (mm)	A (mm)	B (mm)	φG (mm)	φZ (mm)	容积 Volume (l)	排污口 Drain Outlet	图例 Fig.
FAS-2210	7/8"	3/8"	140	475	81	90	150	9.0	5.0	1"-14UNS	a
FAS-2810	1-1/8"	3/8"	165	534	79	100	175	9.0	8.0	1"-14UNS	a
FAS-2812	1-1/8"	1/2"	165	534	79	100	175	9.0	8.0	1"-14UNS	a
FAS-3512	1-3/8"	1/2"	165	649	83	100	175	9.0	10.0	1"-14UNS	a
FAS-3516	1-3/8"	5/8"	165	649	83	110	175	9.0	10.0	1"-14UNS	a
FAS-4216	1-5/8"	5/8"	219	610	110	110	200	12.0	16.0	1"-14UNS	a
FAS-5416	2-1/8"	5/8"	273	612	127	130	255	12.0	24.0	1"-14UNS	a
FAS-5422	2-1/8"	7/8"	273	612	127	130	255	12.0	24.0	1"-14UNS	a
FAS-7622	2-5/8"	7/8"	273	632	127	130	255	12.0	24.0	1"-14UNS	a
FAS-7622P	2-5/8"	7/8"	325	575	150	180	---	---	29.0	1"-14UNS	b

- 适用于蒸发温度低于-15℃的制冷装置;
- 强大的气液分离能力和冷热交换能力, 可避免未过热的湿蒸气进入压缩机;
- 制冷剂进入热力膨胀阀前使其进一步过冷 (增加液焓、避免闪发气体), 可以有效提高制冷效率;
- 设计压力: 2.5 MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A;
- 连接口用途: (a)气进口,(b)气出口,(c)液进口,(d)液出口,(e)排污口,(f)安全阀口。
- Suitable for refrigeration units with evaporating temperature below -15°C.
- Powerful gas-liquid separation and heat-exchange capabilities avoid un-superheated wet vapor from entering the compressor.
- Before the high pressure liquid refrigerant goes into the thermal expansion valve, it can be subcooled more (to increase liquid enthalpy value, to avoid flash gas), and also can improve the working efficiency of the system;
- Design pressure: 2.5 MPa;
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A;
- Joints application: (a) gas inlet, (b) gas outlet, (c) liquid inlet, (d) liquid outlet, (e) drain outlet, (f) for safety valve.

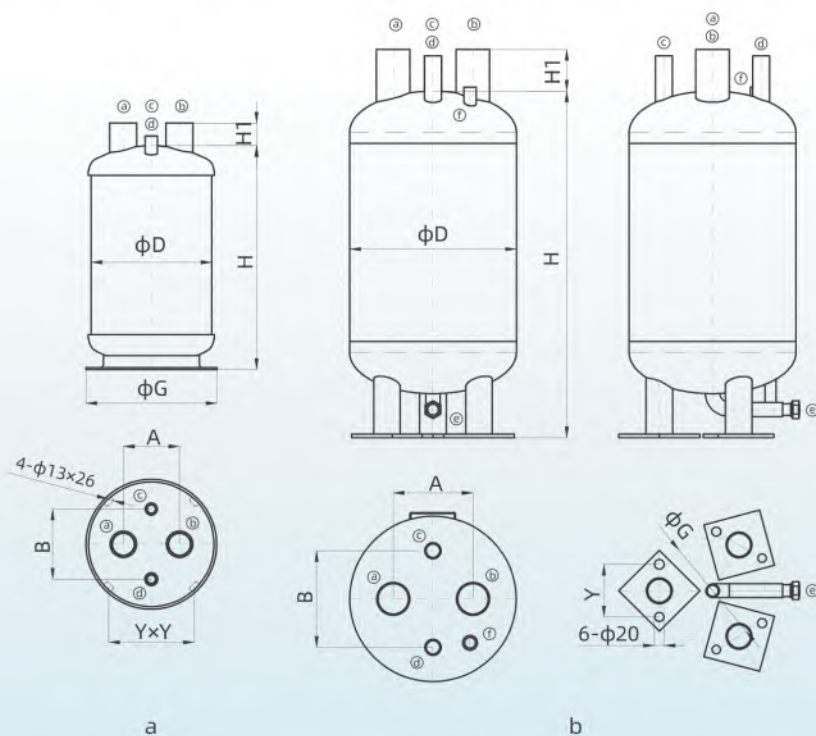

型号 Model	气管 Suction Pipe	液管 Liquid Pipe	ΦD (mm)	H (mm)	H1 (mm)	A (mm)	B (mm)	Y (mm)	ΦG (mm)	容积 Volume (l)	换热 面积 (m ²)	低压 储液量 Volume of Low Pressure (l)	图例 Fig.
FAR-50	2-1/8"ODS	7/8"ODS	Φ273	509	51	127	160	193	296	24	0.38	10	a
FAR-65	Φ76×4.0	Φ38×3.0	Φ377	788	75	180	220	120	240	65	0.55	21	b
FAR-80	Φ89×4.0	Φ45×3.0	Φ462	940	79	220	260	120	300	120	0.94	45	b
FAR-100	Φ108×4.0	Φ45×3.0	Φ562	1110	100	280	300	135	360	213	1.78	80	b
FAR-125	Φ133×4.0	Φ57×3.5	Φ612	1240	99	320	360	135	400	282	2.03	92	b

- FHR系列低压储液回热器是为速冻机、速冻库等制冷剂充注量较大的制冷系统设计的；
- 低压储液容积大，可以储存一定量未过热的制冷剂液体；
- 采用了内/外螺纹高效换热管，具有强大的冷热交换能力。用从高压储液器供液管流入的液体制冷剂，与未过热的气体制冷剂进行热交换，气体制冷剂得到有效地过热后返回压缩机；
- 高效节能型设计，在高压液体制冷剂进入热力膨胀阀前使其过冷（液体焓值增加、避免出现气体闪发），可以大幅度提高压缩机的工作效率；
- 独特的U形管和回油孔设计，既保证了良好的回油效果，又可有效的避免液体制冷剂进入压缩机吸气管，避免压缩机液击；
- FHR-180,FHR-245,FHR-320设计压力：2.5MPa；
FHR-467,FHR-670,FHR-1000设计压力：1.7MPa；
- 适用制冷剂：R134a,R22,R407C,R404A,R507A；
- 连接口用途：(a)气体进口,(b)气体出口,(c)液体进口,(d)液体出口,(e)排污口,(f)安全阀接口。
- FHR Series low pressure liquid receiver with heat exchanger is designed for the systems with larger refrigerants charge, such as blast freezers, contact plate freezers, IQF freezers, and so on.
- Larger volume of the low pressure liquid receiver, and it can store some non-overheat refrigerant.
- Using the double sides high efficiency threaded tube, with a strong cold and heat exchange ability. The liquid refrigerant flowing from the high-pressure receiver is heat-exchanged with the un-superheated gas refrigerant, and the gas refrigerant is effectively superheated and returns to the compressor;
- High efficiency and energy saving design. Before the high pressure liquid refrigerant goes into the thermal expansion valve, it can be subcooled more (to increase liquid enthalpy value, to avoid flash gas), and also can greatly improve the working efficiency of the compressor;
- With the special design of U shape tube and oil return hole, it can guarantee the perfect oil return and prevent the liquid refrigerant from entering into the compressor, so it can avoid liquid slugging to compressor.
- FHR-180,FHR-245,FHR-320 design pressure:2.5 MPa, FHR-467,FHR-670,FHR-1000 design pressure:1.7 MPa
- Applicative refrigerants:R134a,R22,R407C,R404A,R507A;
- Joints application:(a) gas inlet, (b)gas outlet, (c)liquid inlet, (d)liquid outlet, (e)drain outlet, (f) for safety valve;

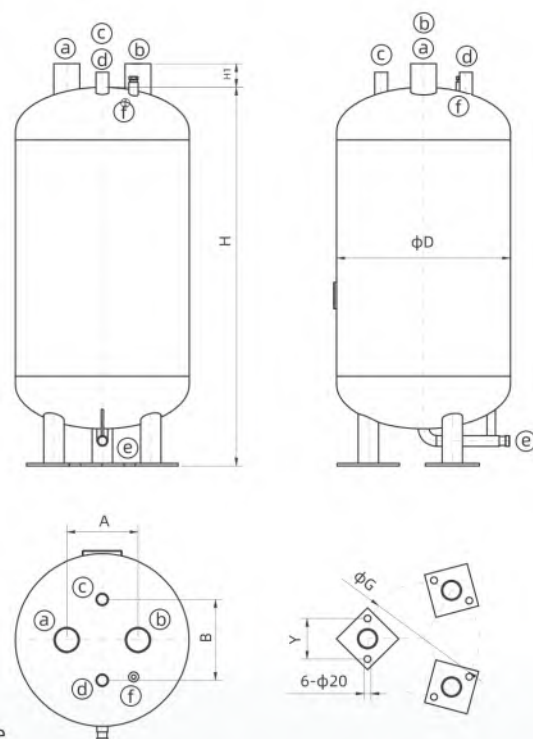

型号 Model	气管 Suction Pipe (mm)	液管 Liquid Pipe (mm)	φD (mm)	H (mm)	H1 (mm)	A (mm)	B (mm)	Y (mm)	φG (mm)	容积 Volume (l)	换热面积 Heat transfer area (m ²)	低压 储液量 Volume of Low Pressure (l)
FHR-180	φ76	φ38	512	1122	70	210	250	120	330	180	0.78	38
FHR-245	φ89	φ45	562	1246	75	280	300	135	360	245	1.21	63
FHR-320	φ108	φ45	612	1356	100	308	300	135	400	320	1.30	83
FHR-467	φ133	φ57	712	1480	120	320	430	135	460	467	2.45	140
FHR-670	φ159	φ57	812	1652	180	432	460	160	520	670	2.76	207
FHR-1000	φ219	φ76	912	1882	180	414	560	160	580	1000	5.61	428


FAH系列三器一体器, 是一款经济节能产品。

它将储液器、气液分离器、冷热交换器三个装置有机的结合在一起。利用回到容器内侧气液分离器中的低温制冷剂 and 容器外侧储液器中的高压液态制冷剂进行热交换, 在高压液体制冷剂进入热力膨胀阀前使其过冷 (焓值增加、避免出现闪发气体), 可以大幅度提高压缩机的工作效率。又可有效的避免液体制冷剂进入压缩机吸气管。


- 安装方法: 垂直安装;
- 建议将容器和供液管路做绝热处理;
- 低压侧设计压力: 2.5 MPa;
- 高压侧设计压力: 2.9 MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

FAH Series Receiver Accumulator Cooling & Heating Exchanger Three in one Unit is a kind of economical and energy conservation product which combines the liquid receiver and the accumulator and the cooling & heating exchanger as one unit reasonably. The refrigerant in the liquid receiver will be exchanged by the returned lower suction inside the accumulator and the high pressure liquid refrigerant which is outside the liquid receiver. The high pressure refrigerant will be lower before it is entered into thermostatic expansion valve (Enthalpy value will be increased in order to avoiding flash gas). It will be increased the working efficiency of the compressor, and the same time it will avoid the liquid refrigerant entering into the suction line of the compressor effectively.

- Installation method: vertical installation;
- We recommend that the vessel and the fluid supply line are isolated;
- The design pressure on the low side: 2.5 MPa;
- The design pressure on the high side: 2.9 MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

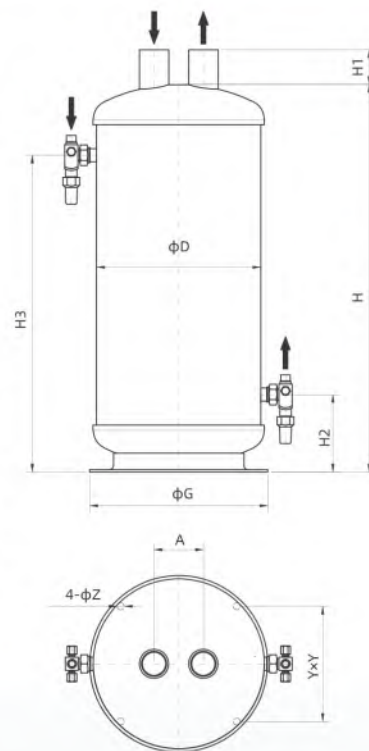

型号 Model	气管 Suction Pipe (Inch)	液管 Liquid Pipe (Inch)	气室容积 Suction Pipe (l)	液室容积 Liquid Pipe (l)	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	A (mm)	Y (mm)	φG (mm)	φZ (mm)
FAH-307	7/8"	1/2"	7.0	13	219	622	39	114	515	81	155	250	12
FAH-511	1-1/8"	5/8"	8.5	20	273	589	35	130	470	79	193	296	12
FAH-513	1-3/8"	5/8"	9.0	21	273	619	47	130	500	84	193	296	12
FAH-515	1-5/8"	5/8"	9.5	22	273	649	58	130	530	82	193	296	12
FAH-721	2-1/8"	7/8"	15.6	24.3	325	637	60	179	464	130	230	350	13

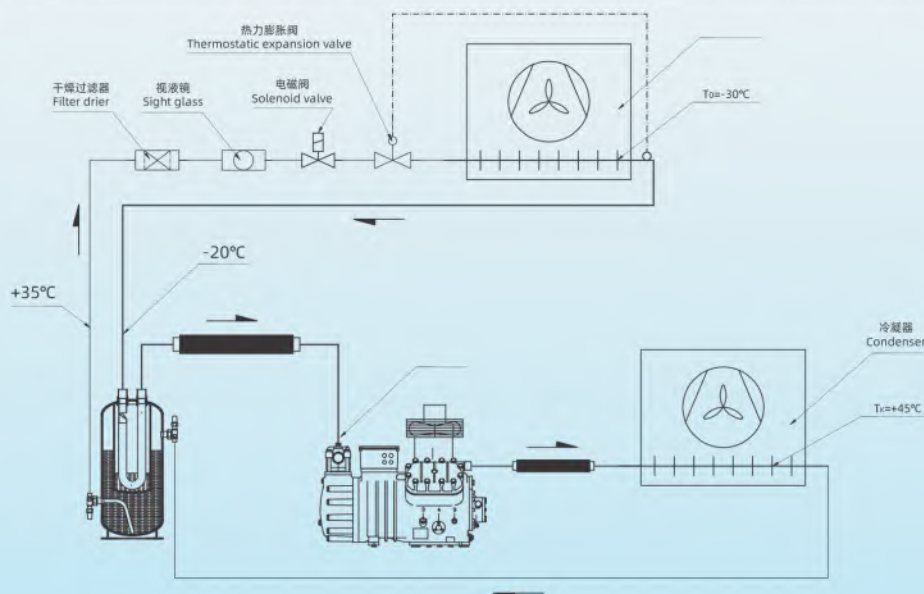


FTH系列冷热换热器主要用于制冷装置中液体管路和吸气管路之间的冷热交换。冷热换热器和液体出口管道需要进行保温。

- 提高蒸发器的制冷能力，特别是低温系统；
- 有助于保证膨胀阀前制冷剂液体不出现闪发气体；
- 通过膨胀阀最小过热度的设定，可使蒸发器发挥最大的制冷能力；
- 合理提高吸气过热度，避免压缩机湿压缩；
- 许可最大工作压力：3.1MPa；
- 许可工作温度范围：-40℃ ~ +120℃
- 适用制冷剂：R134a,R22,R407C,R404A,R507A。

FTH series cold-heat exchanger is mainly used for cold and heat exchange between the liquid line and the suction line in the refrigeration device. Cold and heat exchanger and liquid outlet pipe need to be insulated.

- Improve the refrigeration capacity of the evaporator, especially the low temperature system;
- Help to ensure that the refrigerant liquid in front of the expansion valve does not appear flashing gas;
- Through the setting of the minimum superheat of the expansion valve, the evaporator can play the maximum cooling capacity;
- Reasonably improve the suction superheat, to avoid the compressor wet compression;
- Maximum permitted working pressure: 3.1MPa;
- Permitted working temperature range: -40℃ ~ + 120℃;
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A.

型号 Model	气管 Suction Pipe(Inch)	液管 Liquid pi(inch)	φD (mm)	L (mm)	L1 (mm)	F (mm)	A (mm)	H (mm)	φZ (mm)
FTH-1022	7/8"	3/8"	57	330	116	80	101	88	9.0
FTH-1222	7/8"	1/2"	57	330	114	80	105	88	9.0
FTH-1228	1-1/8"	1/2"	76	400	144	100	124	100	9.0
FTH-1235	1-3/8"	1/2"	76	444	174	100	124	100	9.0
FTH-1635	1-3/8"	5/8"	76	444	170	100	124	100	9.0
FTH-1642	1-5/8"	5/8"	89	490	220	100	147	115	9.0
FTH-2242	1-5/8"	7/8"	89	497	212	100	147	115	9.0
FTH-2254	2-1/8"	7/8"	102	608	262	120	162	132	9.0
FTH-2854	2-1/8"	1-1/8"	102	608	256	120	162	132	9.0

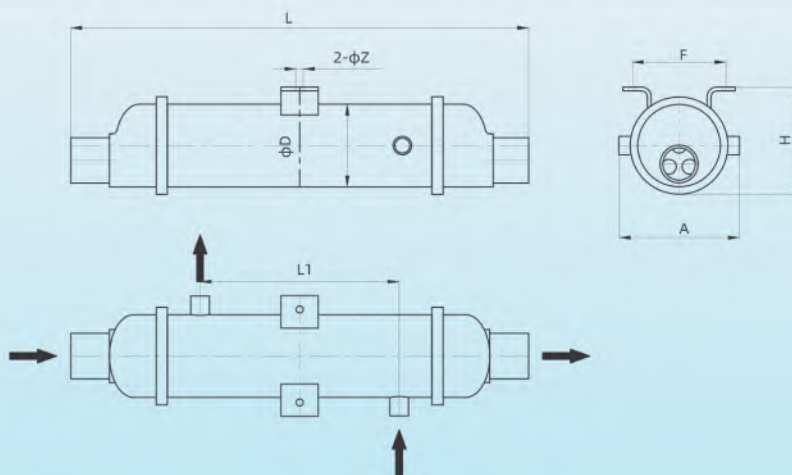

小型储液器选型

Model selection for small liquid receiver

储液器容积 Volume	制冷量Refrigeration capacity (KW)		
	空调工况 Air conditioning	中温工况 Medium temp.	低温工况 Low temp.
4L	3.5	2.2	0.4
6L	5.5	3.4	2.1
8L	8.0	4.2	2.9
10L	10.5	6.3	3.8
12L	14.0	8.3	4.8
14L	16.0	9.5	5.5
16L	18.0	11.0	6.3
19L	22.0	14.0	7.8
23L	28.0	17.5	10.0
29L	36.5	23.0	14.0

1、数值基于: R22制冷剂 (冷间使用吊顶式冷风机, 机组靠近冷间安装)。

2、修正系数: 使用R404A/R507A (R22数值×1.4), 使用R134a (R22数值×1.1)。

1、The data listed above is on the base of refrigerant R22(cold room with the air cooler of ceiling fan type, and the unit shall be installed close to the cold room).





2、Correction factor: With refrigerant R404A/R507A(value of R22 times 1.4) . With refrigerant R134a(value of R22 times 1.1) .

L系列立式储液器进口为ODS(钎焊)碳钢接口, 出口装有截止阀。L-19、L-23、L-29三个型号进/出口均装有截止阀。所有型号均设计一个1/4"-18NPT安全阀接口。

- 设计压力: 2.9 MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

The inlet of L series vertical liquid receiver is ODS(soldering) carbon steel connection. The outlet is assembled with cut-off valve. But both of the inlet and outlet of L-19、L-23、L-29 are assembled with cut-off valves. All the models are designed with 1/4"-18NPT safety valve connection.

- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

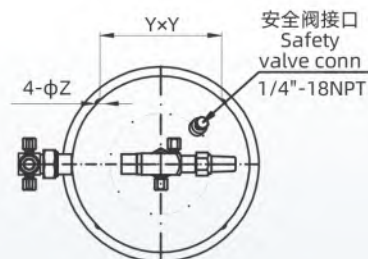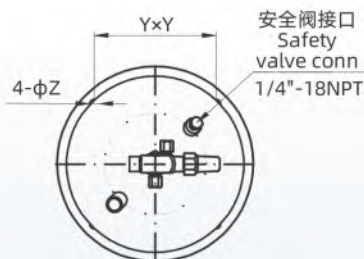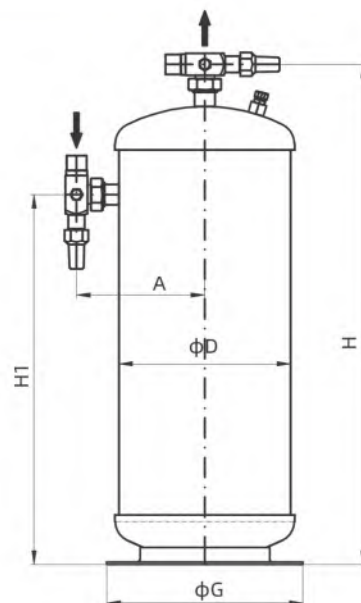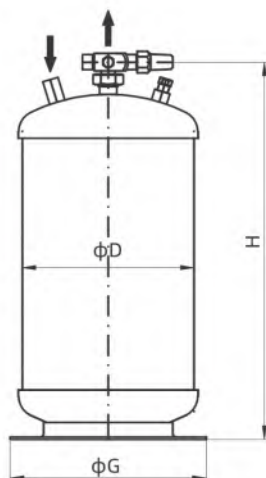


a

b

型号 Model	ΦD (mm)	H (mm)	H1 (mm)	A (mm)	ΦG (mm)	Y (mm)	ΦZ (mm)	进口 Inlet (ODF)	出口 Outlet (ODF)	容积 Volume (l)	图例 Fig.
L-4	165	290	---	---	190	120	9.0	3/8"	3/8"	4	a
L-6	165	390	---	---	190	120	9.0	1/2"	1/2"	6	a
L-8	165	490	---	---	190	120	9.0	1/2"	1/2"	8	a
L-10	219	369	---	---	250	155	12	5/8"	5/8"	10	a
L-12	219	429	---	---	250	155	12	5/8"	5/8"	12	a
L-14	219	484	---	---	250	155	12	5/8"	5/8"	14	a
L-19	219	641	474	164	250	155	12	7/8"	7/8"	19	b
L-23	219	756	589	164	250	155	12	7/8"	7/8"	23	b
L-29	273	643	464	191	296	193	13	7/8"	7/8"	29	b

L4 Series Vertical Liquid Receiver L4系列立式储液器

- L4系列立式储液器进口为坚固的碳钢接口, 出口为旋转锁定接头(用户自备标准旋转锁定截止阀);
- 所有储液器顶部均装有1/4"-18NPT工艺接口;
- 最大许可运行压力:2.9 MPa;
- 最高许可使用温度:60°C;
- 适用制冷剂:R134a,R22,R407C,R404A,R507A;
- The inlet of L4 series vertical liquid receiver is made by stable carbon steel, and the outlet is assembled with rotating locked connection(the user can assemble rotating locked valve to this connection).
- All models of the liquid receiver are fixed with 1/4"-18NPT connection on the top.
- Max. Admissible running pressure:2.9MPa;
- Max. Admissible using temperature:60°C;
- Applicable refrigerant: R134a,R22,R407C, R404A, R507A.

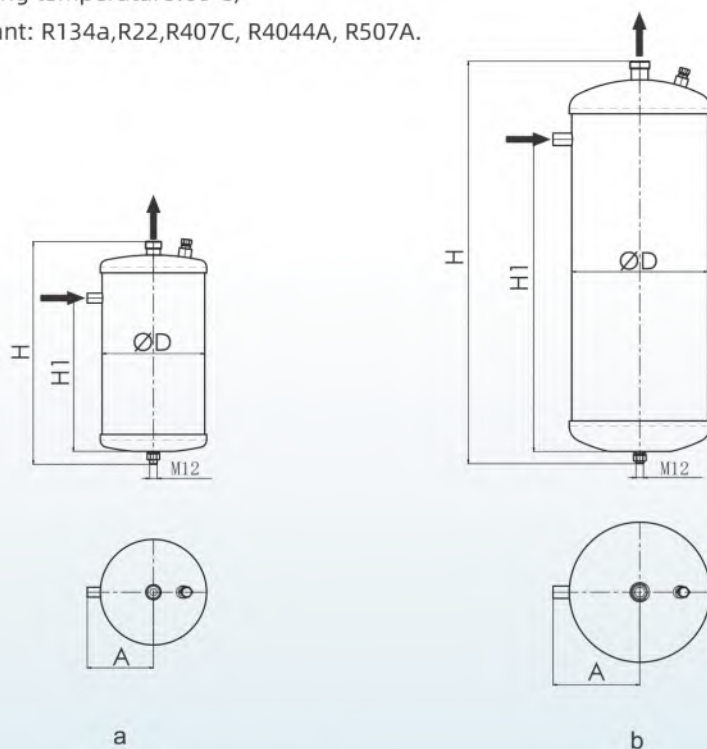


型号 Model	φD (mm)	H (mm)	H1 (mm)	A (mm)	进口 Inlet	出口 Outlet	容积 Volume (l)	图例 Fig.
L4-04	140	366	255	92	3/8"ODS	1"-14UNS旋转锁定接头 1"-14UNS rotating locked connection	4	a
L4-06	165	361	248	107	1/2"ODS	1"-14UNS旋转锁定接头 1"-14UNS rotating locked connection	6	a
L4-08	165	461	348	107	1/2"ODS	1"-14UNS旋转锁定接头 1"-14UNS rotating locked connection	8	a
L4-10	165	572	459	110	5/8"ODS	1"-14UNS旋转锁定接头 1"-14UNS rotating locked connection	10	a
L4-15	219	507	361	140	5/8"ODS	1-1/4"-12UNF旋转锁定接头 1-1/4"-12UNF rotating locked connection	15	b
L4-20	219	652	506	140	5/8"ODS	1-1/4"-12UNF旋转锁定接头 1-1/4"-12UNF rotating locked connection	20	b

45L系列立式储液器是为了R410A和CO₂亚临界制冷装置开发的。

- 最大许可运行压力: 4.5MPa;
- 设计温度: 60°C;
- 全部型号储液器全部设计了1/2NPT安全阀接口。

The 45L series vertical receiver is developed for R410A and sub-critical CO₂ refrigeration system.

- Maximum allowable working pressure (MAWP): 4.5MPa;
- Design temperature: 60°C;
- All models of the receiver are equipped with 1/2NPT safety valve connection.

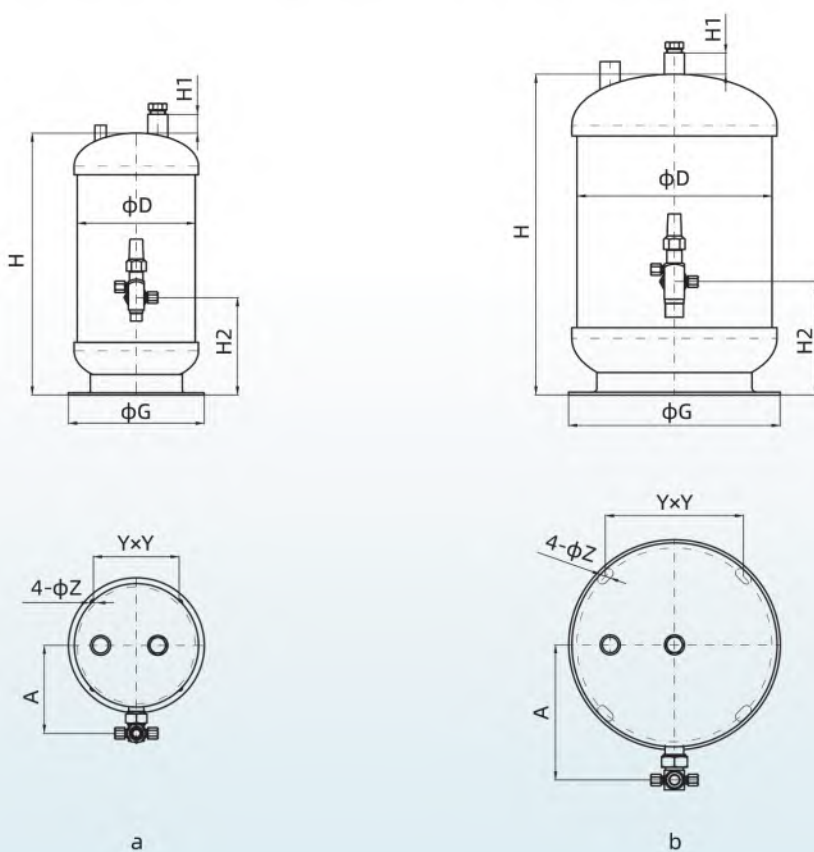


型号 Model	ØD (mm)	H (mm)	H1 (mm)	H2 (mm)	A (mm)	Y (mm)	ØG (mm)	ØZ (mm)	进口 Inlet (ODS)	出口 Outlet (ODS)	容积 Volume (l)	图例 Fig.
45L-4S	165	259	27	137	124	190	120	9	1/2"	1/2"	4	a
45L-6S	165	369	27	137	124	190	120	9	1/2"	1/2"	6	a
45L-8S	165	474	27	137	124	190	120	9	5/8"	5/8"	8	a
45L-10S	219	349	30	140	163	250	155	12	7/8"	7/8"	10	a
45L-15S	219	499	30	140	163	250	155	12	7/8"	7/8"	15	a
45L-20S	273	452	30	160	190	296	193	13×26	7/8"	7/8"	20	b
45L-25S	273	542	30	165	210	296	193	13×26	1-1/8"	1-1/8"	25	b
45L-29S	273	617	30	165	210	296	193	13×26	1-1/8"	1-1/8"	29	b

W系列卧式储液器进/出口均装有截止阀, 设计了一个安全阀接口(1/4"-18NPT)。

- 设计压力: 2.9 Mpa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

The inlet and outlet of W series horizontal liquid receiver are assembled with cut-off valves. All the models are designed with 1/4"-18NPT safety valve connection.


- The design pressure: 2.9MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

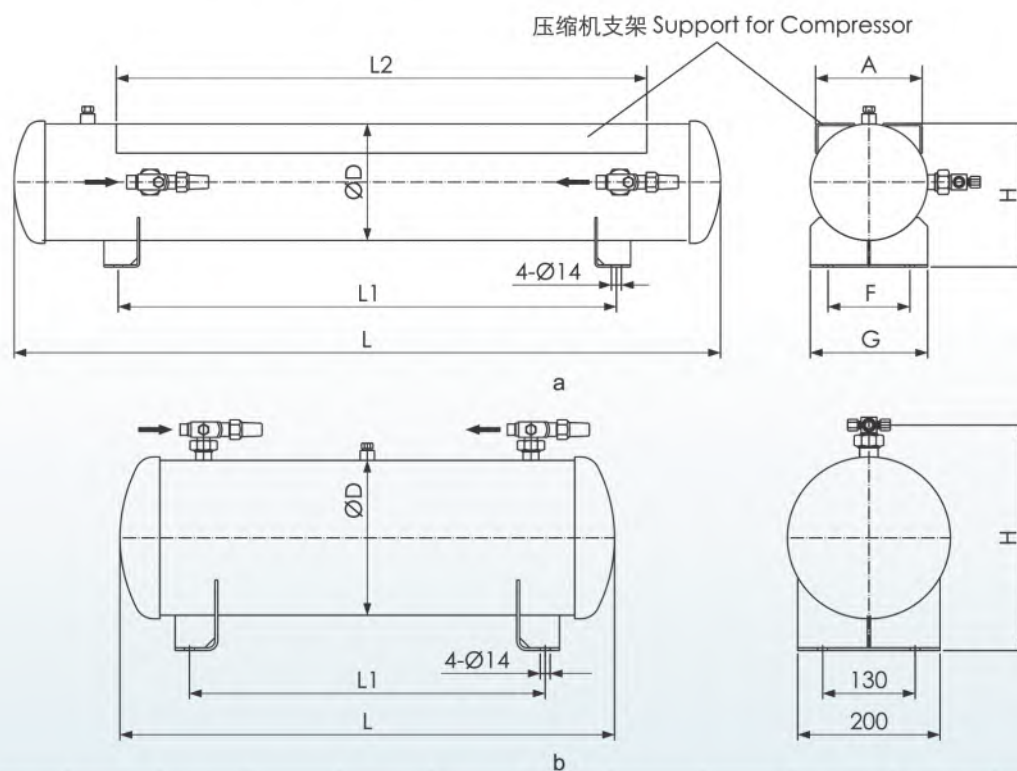

型号 Model	φD (mm)	L (mm)	L1 (mm)	L2 (mm)	H (mm)	A (mm)	G (mm)	F (mm)	进口 Inlet (ODF)	出口 Outlet (ODF)	容积 Volume (l)	图例 Fig.
W-14	165	743	460	496	203	150	165	115	1/2"	1/2"	14	a
W-16	165	843	640	596	203	150	165	115	5/8"	5/8"	16	a
W-19	165	993	700	746	203	150	165	115	5/8"	5/8"	19	a
W-23	165	1203	945	956	203	150	165	115	7/8"	7/8"	23	a
W-29	219	865	625	600	269	190	200	130	7/8"	7/8"	29	a
W2-14	219	436	220	-	310	-	200	130	1/2"	1/2"	14	b
W2-16	219	495	280	-	310	-	200	130	5/8"	5/8"	16	b
W2-19	219	580	360	-	310	-	200	130	5/8"	5/8"	19	b
W2-23	219	695	500	-	319	-	200	130	7/8"	7/8"	23	b
W2-29	219	865	625	-	328	-	200	130	7/8"	7/8"	29	b


W4 系列卧式储液器 W4 Series Horizontal Liquid Receiver

- W4系列卧式储液器进出口均为旋转锁定接头；
- 储液器顶部均装有1/4"-18NPT接口；
- 最大许可工作压力[bar]: 31 10
- 许可工作温度[°C]: 100..-10 -10..-40
- 适用制冷剂: R134a,R22,R407C,R404A, R507A。
- The inlet and outlet of W4 series horizontal liquid receiver are rotating locked connections ;
- There is a 1/4"-18NPT connection on the top of liquid receiver;
- Max. Admissible Working Pressure [bar]: 31 10
- Admissible Working Temperature [°C]: 100.-10 -10.-40
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A

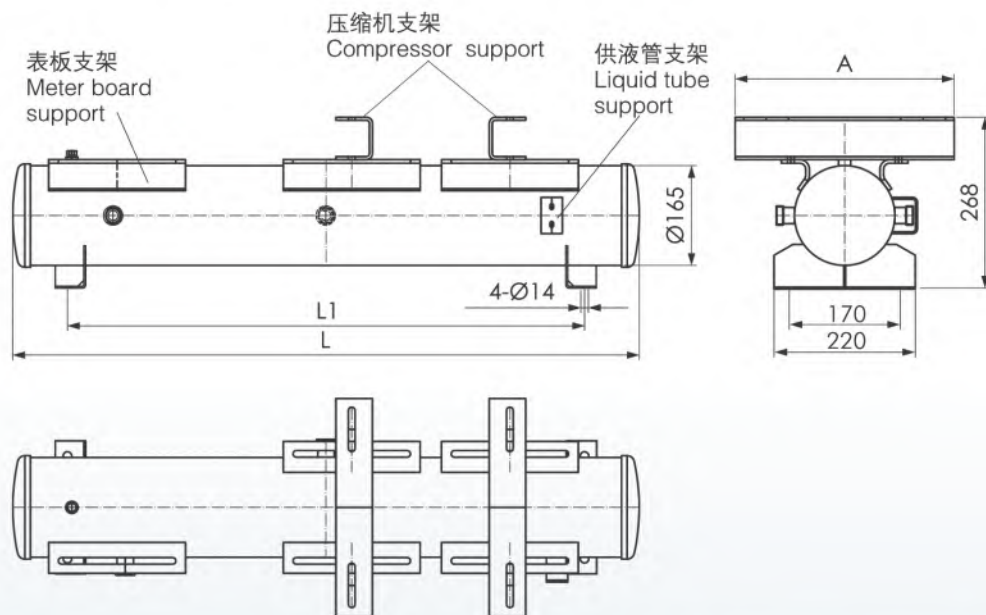

型号 Model	L (mm)	L1 (mm)	A (mm)	进口 Inlet	出口 Outlet	容积(l) Volume(l)
W4-16	830	600	310	5/8"ODS(1-1/4"-12UNF)	5/8"ODS(1-1/4"-12UNF)	16
W4-20	1030	850	360	5/8"ODS(1-1/4"-12UNF)	5/8"ODS(1-1/4"-12UNF)	20
W4-25	1280	1100	360	7/8"ODS(1-1/4"-12UNF)	7/8"ODS(1-1/4"-12UNF)	25

卧式储液器使用示意图

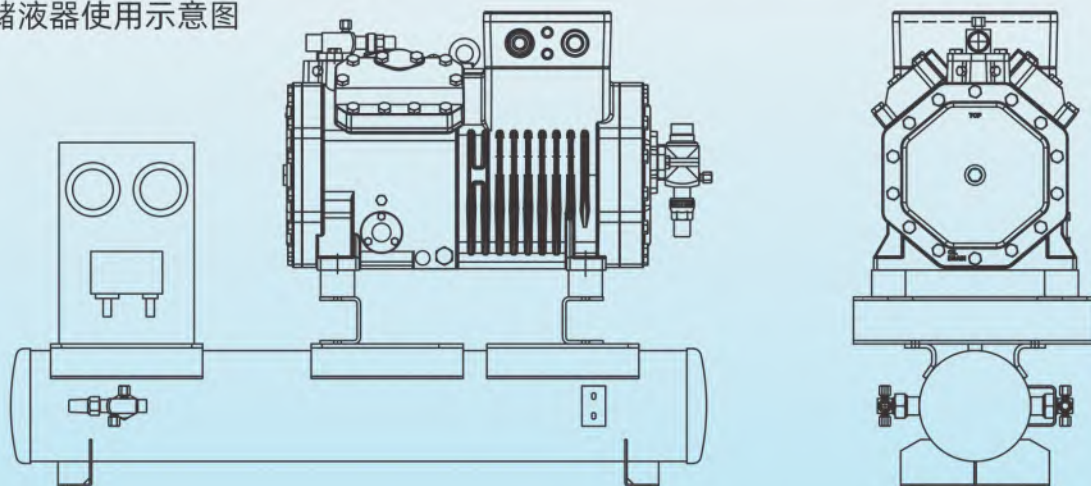

储液器容积 Liquid Receiver Volume (l)	制冷量 Refrigerating Capacity (KW)		
	蒸发温度 Evaporation Temp:-10°C	蒸发温度 Evaporation Temp:-25°C	蒸发温度 Evaporation Temp:-40°C
40L	60	25	15
60L	90	35	20
80L	120	50	30
100L	160	65	35
150L	260	110	60
200L	380	175	100
250L	450	200	120
300L	520	240	140
500L	750	420	230

1、以上数值基于使用R22(使用吊顶式冷风机作为蒸发器的制冷装置), 使用R404A/R507A(R22数值 $\times 1.4$), 使用R134a(R22数值 $\times 1.1$);

2、对于系统管路较长和排管蒸发器的制冷装置应根据情况加大储液器容积;



3、使用满液式制冷循环系统的制冷装置应根据实际制冷剂用量进行选型。

1、The data above is based on the use of R22(The ceiling type air cooler is used as the evaporator of the refrigerant vessel), R404A/R507A(R22 data $\times 1.4$), R134a(R22 data $\times 1.1$);

2、For the system with long pipe and a refrigerating vessel pipe evaporator should be based on the situation of increasing the receiver volume;

3、Refrigeration vessel using system full liquid type refrigeration cycle should be carried out according to the actual amount of refrigerant selection.

- 储液器上带有进口截止阀, 出口截止阀;
 - 设计安装了上, 中, 下三个视液镜, 方便观察液位;
 - 可根据客户的要求加装低液位报警器;
 - 设计压力: 2.9 MPa;
 - 适用制冷剂: R134a、R22、R407C、R404A、R507A。
- The liquid receiver is assembled with inlet cut-off valve and outlet cut-off valve;
 - It is designed with 3 pieces of sight glasses which are located on top and center and bottom, with the sight glasses you can observe the liquid level expediently;
 - It can be assembled low-liquid level alarm indicator to the liquid receiver according to customers' requirements.
 - The design pressure: 2.9 MPa;
 - Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

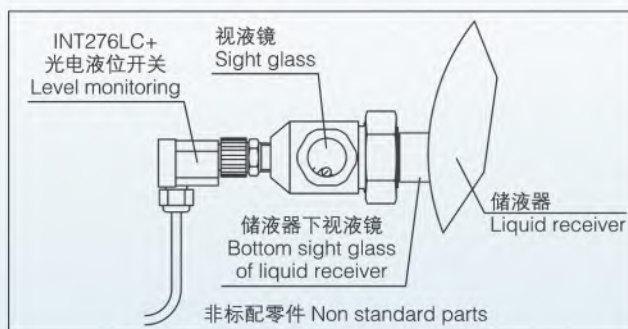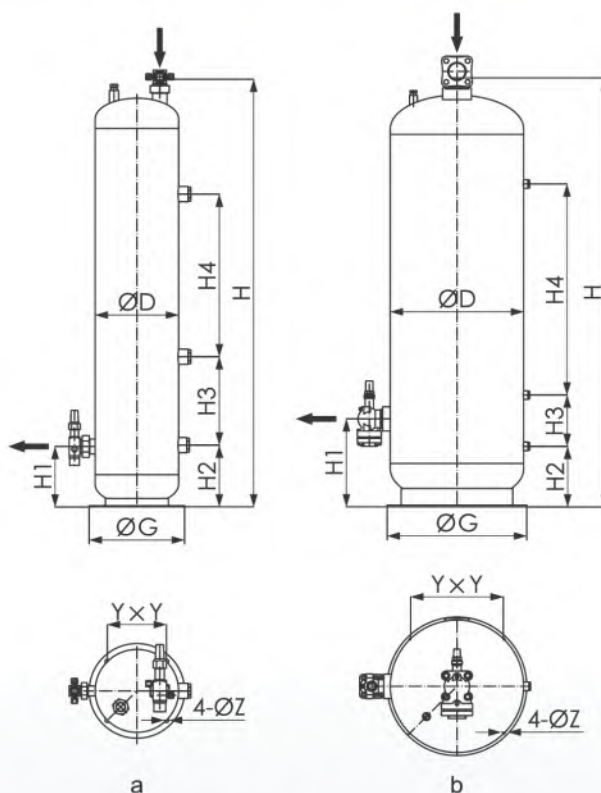


型号 Model	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	Y (mm)	φG (mm)	φZ (mm)	进口 Inlet (Inch)	出口 Outlet (Inch)	容积 Volume (l)	图例 Fig.
E1L-40L	219	1256	159	163	259	525	155	250	12	1-1/8"	7/8"	40	a
E1L-60L	273	1242	179	179	242	520	193	296	12	1-3/8"	1-1/8"	60	a
E1L-80L	325	1205	203	199	317	330	230	350	13	1-5/8"	1-3/8"	80	a
E1L-100L	325	1465	203	199	317	590	230	350	13	1-5/8"	1-3/8"	100	a
E1L-150L	377	1656	257	215	372	652	267	410	13	2-1/8"	1-5/8"	150	b
E1L-200L	462	1471	297	245	230	600	327	490	14	2-5/8"	2-1/8"	200	b
E1L-250L	512	1491	305	251	233	616	360	540	18	2-5/8"	2-1/8"	250	b
E1L-300L	562	1507	390	262	237	600	390	590	18	3"	2-5/8"	300	b
E1L-500L	612	2007	406	279	237	975	425	640	18	3"	2-5/8"	500	b

ECL Series Vertical Liquid Receiver ECL系列立式储液器



- 储液器上设计了进液口、出液口、安全阀口、检修阀口、高液位视镜、低液位视镜;
- 可根据客户要求加装低液位报警装置;
- ECL-50,ECL-80,ECL-100,ECL-150,ECL-200
ECL-250 设计压力: 2.9MPa(表压);
- ECL-300设计压力: 2.9MPa(表压);
- ECL-400,ECL-500,ECL-800设计压力: 2.5MPa(表压);
- 适用制冷剂: R134a,R22,R407C,R404A,R507A。

- The liquid receiver is designed with liquid inlet, liquid outlet, safety valve port, Check valve port, high liquid level sight glass, and low liquid level sight glass;
- A low level alarm device can be installed according to customer requirements;
- ECL-50, ECL-80, ECL-100, ECL-150, ECL-200, ECL-250 design pressure: 2.9MPa(gauge);
- ECL-300 design pressure: 2.9MPa(gauge);
- ECL-400, ECL-500, ECL-800 design pressure: 2.5MPa(gauge);
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A.

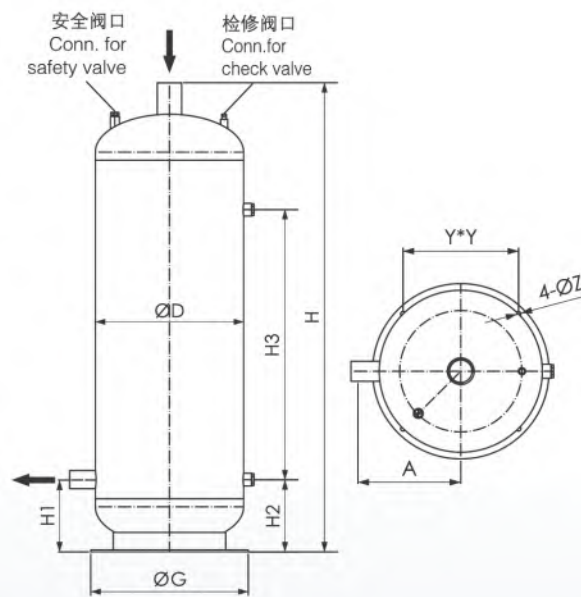

型号 Model	φD (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	A (mm)	Y (mm)	φG (mm)	φZ (mm)	进口 Inlet (mm)	出口 Outlet (mm)	容积 Volume (l)
ECL-50	325	789	181	171	420	198	230	350	13	1-3/4"-12UN	1-3/4"-12UN	50
ECL-80	377	910	196	186	480	224	267	410	13	1-3/4"-12UN	1-3/4"-12UN	80
ECL-100	412	976	208	196	500	286	290	440	14	φ57x5 BW	φ45x5 BW	100
ECL-150	462	1158	234	216	610	311	327	490	14	φ76x6 BW	φ57x5 BW	150
ECL-200	512	1236	240	222	660	336	360	540	18	φ76x6 BW	φ57x5 BW	200
ECL-250	512	1486	240	222	860	336	360	540	18	φ76x6 BW	φ57x5 BW	250
ECL-300	562	1480	261	233	850	381	390	590	18	φ89x6 BW	φ76x6 BW	300
ECL-400	612	1660	278	250	960	406	425	640	18	φ89x6 BW	φ76x6 BW	400
ECL-500	716	1548	299	272	850	456	497	750	18	φ89x6 BW	φ76x6 BW	500
ECL-800	716	2328	299	272	1480	456	497	750	18	φ89x6 BW	φ76x6 BW	800


- 储液器上带有进口截止阀、出口截止阀；
- 设计安装了高、低2个视液镜，方便观察液位；
- 可根据客户的要求加装低液位报警器；
- 设计压力：2.9 MPa；
- 适用制冷剂：R134a、R22、R407C、R404A、R507A。
- The liquid receiver is assembled with inlet cut-off valve and outlet cut-off valve;
- It is designed with 2 pieces of sight glasses which are located on top and bottom, with the sight glasses you can observe the liquid level expediently;
- It can be assembled low-liquid level alarm indicator to the liquid receiver according to customers' requirements;
- The design pressure: 2.9 MPa;
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A.

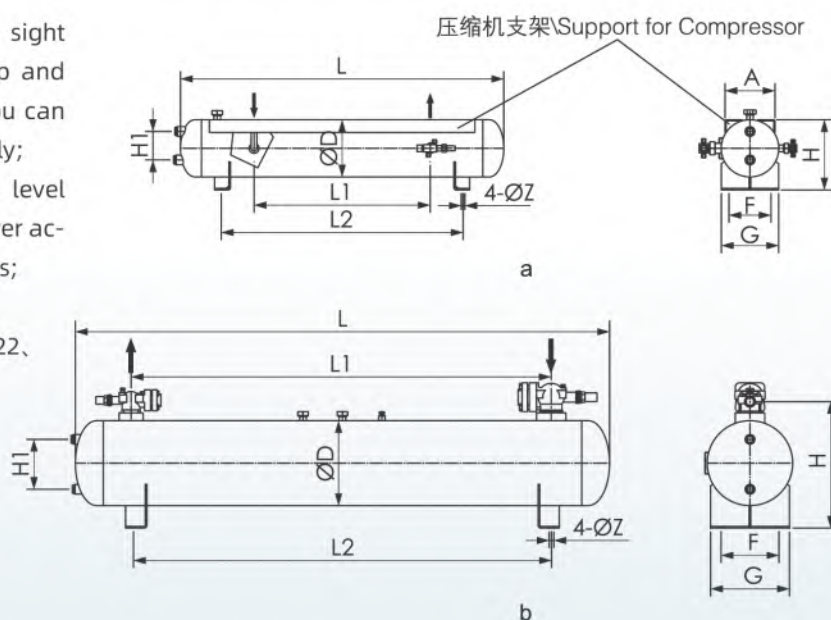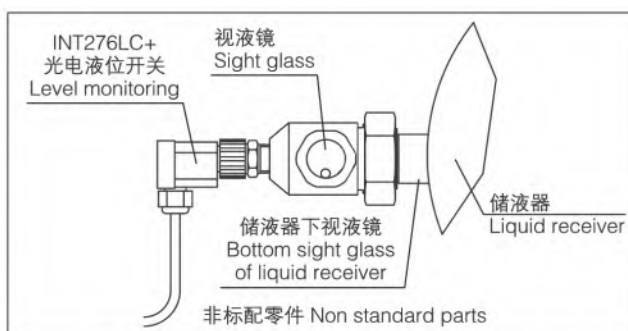

型号 Model	φD (mm)	L (mm)	L1 (mm)	L2 (mm)	H (mm)	H1 (mm)	A (mm)	G (mm)	F (mm)	φZ (mm)	进口 Inlet (Inch)	出口 Outlet (Inch)	容积 Volume (l)	图例 Fig.
E2W-40L	219	1230	670	920	299	130	190	210	140	20	1-1/8"	7/8"	40	a
E2W-60L	273	1171	560	810	353	162	239	260	180	20	1-3/8"	1-1/8"	60	a
E2W-80L	273	1546	1200	1185	419	162	-	260	180	20	1-3/8"	1-1/8"	80	b
E2W-100L	325	1382	965	940	472	190	-	300	220	20	1-5/8"	1-3/8"	100	b
E2W-150L	377	1548	1000	1050	550	220	-	350	250	20	2-1/8"	1-5/8"	150	b
E2W-200L	412	1686	1160	1100	633	250	-	380	260	20	2-5/8"	2-1/8"	200	b
E2W-250L	412	2072	1546	1540	633	250	-	380	260	20	2-5/8"	2-1/8"	250	b
E2W-300L	462	1976	1398	1500	686	316	-	420	290	20	3"	2-5/8"	300	b
E2W-500L	562	2220	1588	1500	786	360	-	510	360	20	3"	2-5/8"	500	b
E2W-800L	716	2246	1490	1530	937	400	-	640	460	20	3"	2-5/8"	800	b

ECW Series Horizontal Liquid Receiver ECW系列卧式储液器

- 储液器上设计了进液口、出液口、安全阀口、排污口、气相平衡口、高液位视镜、低液位视镜；
- 可根据客户要求加装低液位报警装置；
- ECW-50,ECW-80,ECW-100,ECW-150,ECW-200,ECW-250,ECW-300设计压力: 2.9MPa(表压);
- ECW-400设计压力: 2.9MPa(表压);
- ECW-500,ECW-800设计压力: 2.5MPa(表压);
- 适用制冷剂: R134a,R22,R407C,R404A,R507A。
- The liquid receiver is designed with liquid inlet, liquid outlet, safety valve port, sewage outlet, gas phase balance port, high liquid level sight glass, and low liquid level sight glass;
- A low level alarm device can be installed according to customer requirements;
- ECW-50, ECW-80, ECW-100, ECW-150, ECW-200, ECW-250, ECW-300 design pressure: 2.9MPa(gauge);
- ECW-400 design pressure: 2.9MPa(gauge);
- ECW-500, ECW-800 design pressure: 2.5MPa(gauge);
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A.


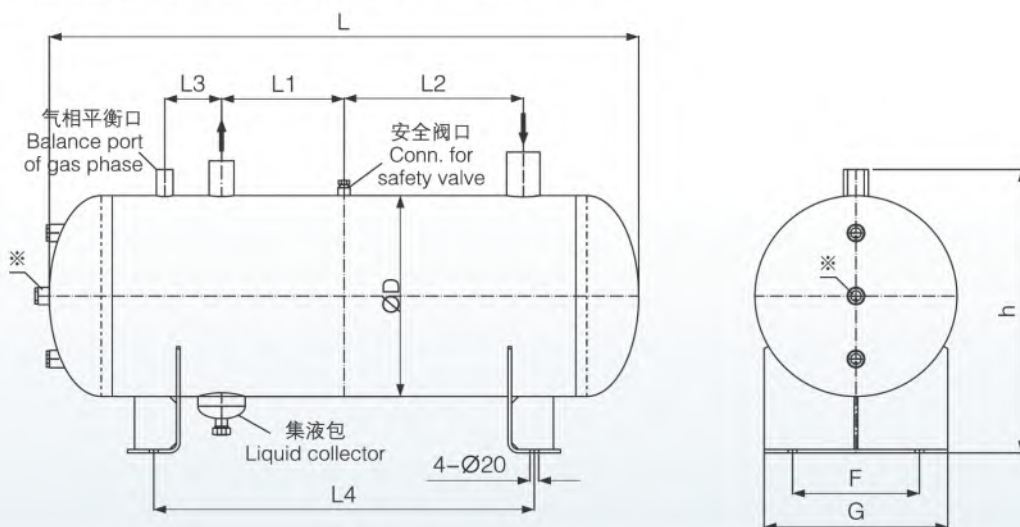


型号 Model	φD (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	H (mm)	F (mm)	G (mm)	进口 Inlet (mm)	出口 Outlet (mm)	气相平衡接口 Balance port of gas phase (mm)	容积 Volume (L)
ECW-50	273	986	200	330	120	660	388	180	260	1-3/4"-12UN	1-3/4"-12UN	1-1/4"-12UNF	50
ECW-80	377	878	130	190	140	480	512	250	350	1-3/4"-12UN	1-3/4"-12UN	1-1/4"-12UNF	80
ECW-100	377	1068	170	335	140	670	557	250	350	φ57x5 BW	φ45x5 BW	1-1/4"-12UNF	100
ECW-150	412	1272	250	410	130	820	642	260	380	φ76x6 BW	φ57x5 BW	φ38x5 BW	150
ECW-200	462	1348	280	410	130	870	692	290	420	φ76x6 BW	φ57x5 BW	φ38x5 BW	200
ECW-250	462	1658	430	565	140	1180	692	290	420	φ76x6 BW	φ57x5 BW	φ38x5 BW	250
ECW-300※	512	1622	355	535	160	1100	742	330	460	φ89x6 BW	φ76x6 BW	φ38x5 BW	300
ECW-400※	562	1786	355	580	200	1190	792	360	510	φ89x6 BW	φ76x6 BW	φ38x5 BW	400
ECW-500※	612	1882	400	615	200	1260	862	400	550	φ89x6 BW	φ76x6 BW	φ38x5 BW	500
ECW-800※	716	2216	530	745	200	1530	966	460	640	φ89x6 BW	φ76x6 BW	φ38x5 BW	800

※筒径≥500mm,容积≥300L的型号增设一个中间液位视镜

The models whose diameter≥500mm and volume≥300L will be assembled with a middle sight glass

- EMW大型卧式储液器接口全部为带丝堵的DN无缝钢管, 无需切割即可方便的焊接各种法兰和截止阀, 有效的避免了脏物进入储液器内部;
- 每台产品标配一个外置液位计, 设计安装了多个视液镜, 方便观察液位。还可根据客户的要求加装高、低液位报警器;
- 该产品不标配截止阀;
- 设计压力: 2.5MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A;
- 连接口用途: (a)(b)(c1)(c2)(d)(e)(f)。
- All the connections of large horizontal liquid receiver are made by DN seamless steel and assembled with plugs. So it will so easy to weld it with all kinds of flanges or cut-off valves, and it also can avoid the dirt entering into the inside of liquid receiver;
- There is a liquid level meter for each liquid receiver. The liquid level meter is designed with many pieces of sight glasses, so it makes you observe the level expediently. We can also assemble the high or low level alarm according to customers' requirements;
- This series of product do not assemble with cut-off valves;
- The design pressure: 2.5MPa;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- Connection application: (a)(b)(c1)(c2)(d)(e)(f)。

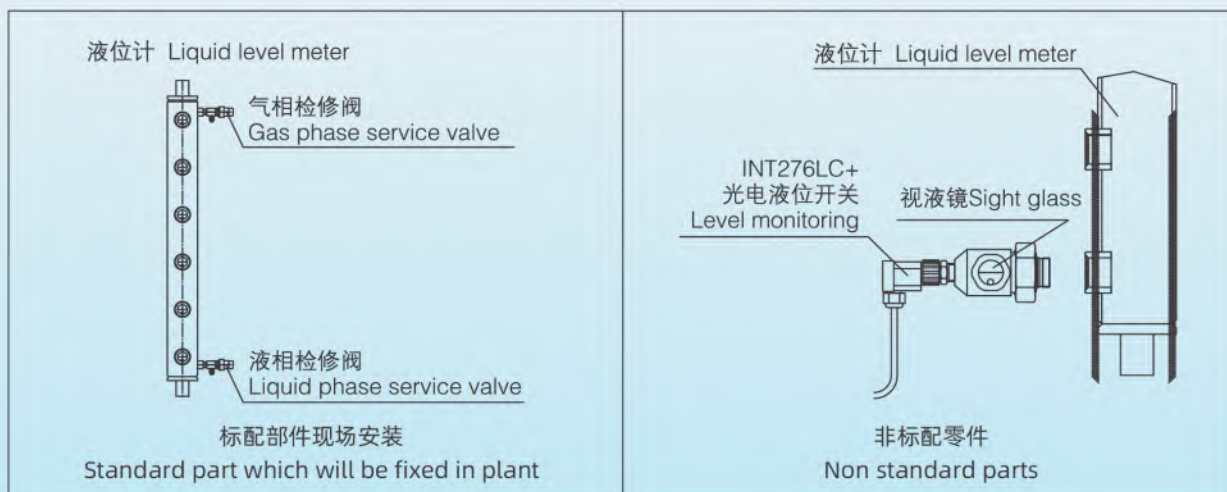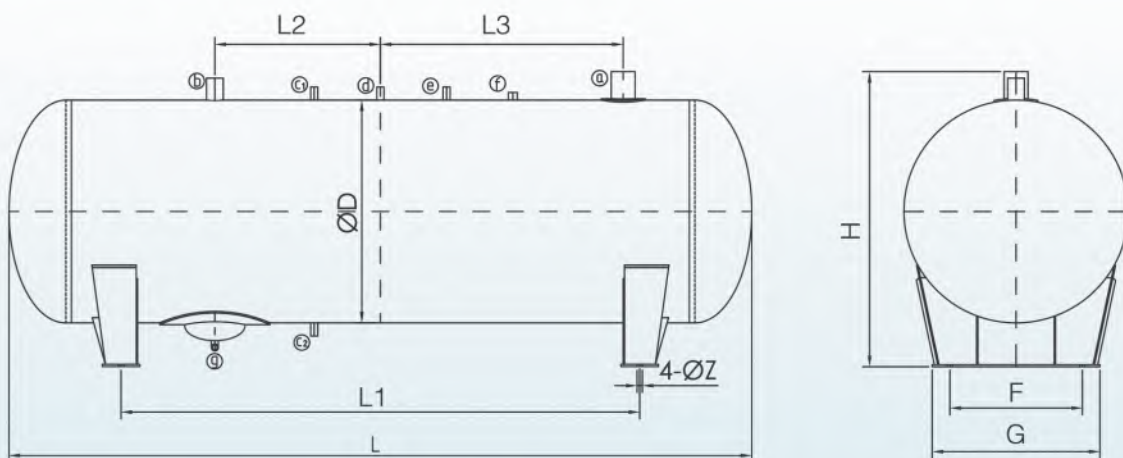

EMW Series Large Horizontal Liquid Receiver EMW系列大型卧式储液器

型号 Model	进口 Inlet (a)	出口 Outlet (b)	液位计气相口 Gas phase conn. for liquid level meter (C1)	液位计液相口 Liquid phase conn. for liquid level meter (C2)	工艺阀口 Technics valve conn. (d)	气相阀口 Gas phase valve conn. (e)	安全阀口 Safety valve conn. (f)	排污口 Drain outlet (g)
EMW-1.0	φ89×4.0	φ76×3.5	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-1.5	φ89×4.0	φ76×3.5	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-2.0	φ89×4.0	φ76×3.5	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-2.5	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-3.0	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-3.5	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-4.0	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-4.5	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-5.0	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0
EMW-6.0	φ108×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT	φ32×3.0

型号 Model	φD (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	H (mm)	G (mm)	F (mm)	φZ (mm)	容积 Volume (m ³)
EMW-1.0	φ716	2731	2000	650	1000	966	640	460	20	1.0
EMW-1.5	φ816	3136	2300	750	1100	1066	720	530	20	1.5
EMW-2.0	φ916	3316	2400	800	1100	1106	810	590	20	2.0
EMW-2.5	φ1020	3370	2350	750	1100	1350	760	600	24	2.5
EMW-3.0	φ1020	4010	3000	1000	1400	1350	760	600	24	3.0
EMW-3.5	φ1120	3890	2680	900	1350	1450	820	660	24	3.5
EMW-4.0	φ1120	4420	3200	1150	1500	1450	820	660	24	4.0
EMW-4.5	φ1224	4200	2900	1000	1400	1554	880	720	24	4.5
EMW-5.0	φ1224	4644	3300	1200	1600	1554	880	720	24	5.0
EMW-6.0	φ1224	5534	4200	1550	2000	1554	880	720	24	6.0




E50PY系列排液桶安装在氟泵供液的制冷系统中，用来储存冻结间或冷藏间热气融霜时由冷风机和排管蒸发器中来的制冷剂。

- 接口全部为带丝堵的DN无缝钢管，无需切割即可方便的焊接各种法兰和截止阀，有效的避免了脏物进入储液器内部；
- 每台产品标配一个外置液位计，设计安装了多个视镜，方便观察液位。还可根据客户的要求加装高、低液位报警器；
- 该产品不标配截止阀；
- 设计压力：2.3MPa；
- 适用制冷剂：R134a、R22、R407C、R404A、R507A；
- 连接口用途：(a)(b)(c1)(c2)(d)(e)(f)(g)。

E50PY series liquid discharging bucket can be used for the fluorine pump feed liquid refrigeration system. It can receive the refrigerants come from the

air cooler and cooling coil when defrosting by super-heated vapour happened in the freezing room or cold storage.

- All the connections of E50PY series liquid discharging bucket are made by DN seamless steel and assembled with plugs. So it will so easy to weld it with all kinds of flanges or cut-off valves, and it also can avoid the dirt entering into the inside of liquid receiver;
- There is a liquid level meter for each liquid receiver. The liquid level meter is designed with many pieces of sight glasses, so it makes you observe the level expediently. We can also assemble the high or low level alarm according to customers' requirements;
- This series of product do not assemble with cut-off valves;
- The design pressure: 2.3MPa;
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A;
- Connection application: (a)(b)(c1)(c2)(d)(e)(f)(g).

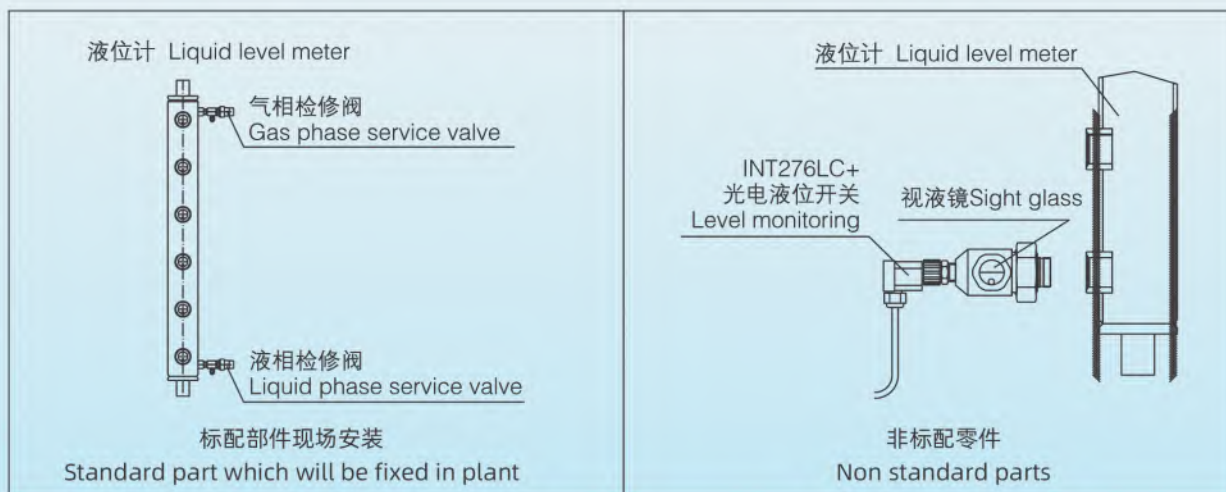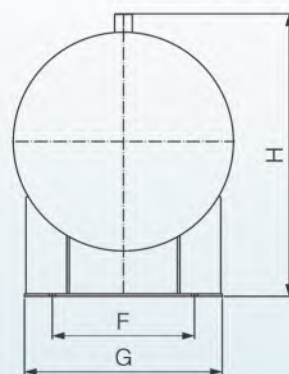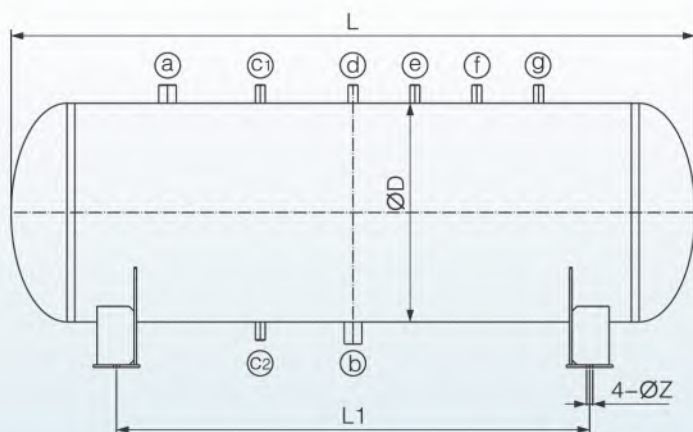

E50PY Series Liquid Discharging Bucket E50PY系列排液桶

型号 Model	进口 Inlet (a)	出口 Outlet (b)	液位计气相口 Gas phase conn. for liquid level meter (C1)	液位计液相口 Liquid phase conn. for liquid level meter (C2)	加压口 Pressurizing conn. (d)	减压口 Relax- oressure conn. (e)	工艺阀口 Technics valve conn. (f)	安全阀口 Safety valve conn. (g)
E50PY-0.3	φ45×3.0	φ45×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1/2"-14NPT
E50PY-0.5	φ57×3.5	φ57×3.5	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	3/4"-14NPT
E50PY-0.8	φ57×3.5	φ57×3.5	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	3/4"-14NPT
E50PY-1.0	φ76×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT
E50PY-1.5	φ76×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT
E50PY-2.0	φ76×4.0	φ76×4.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	1"-11.5NPT

型号 Model	φD (mm)	L (mm)	L1 (mm)	H (mm)	G (mm)	F (mm)	φZ (mm)	容积 Volume (m³)
E50PY-0.3	512	1624	1100	722	460	330	20	0.3
E50PY-0.5	612	1882	1260	842	550	400	20	0.5
E50PY-0.8	712	2212	1530	942	640	460	20	0.8
E50PY-1.0	712	2727	2000	962	640	460	20	1
E50PY-1.5	816	3136	2300	1066	720	530	20	1.5
E50PY-2.0	916	3316	2400	1166	810	590	20	2

FNW系列氟用低压循环桶是氟泵供液系统的专用设备, 其作用是贮存并稳定地供给氟泵循环所需的低压液体, 同时又能对系统回气进行气液分离, 保证压缩机的安全运行, 带“*”的还可兼做排液桶使用。

设计压力: 1.7 MPa;

适用制冷剂: R134a、R22、R407C、R404A、R507A;



连接口用途: (a)(b)(c1)(c2)(d)(e)(f)(g)(h)(i)(j)(m1)(m2)(n)。

FNW Series Fluorine Low-pressure Circulation Barrel is a special designed equipment for fluorine pump liquid feeding system. It can store and steadily feed the low-pressure liquid which be used for fluorine pump's circulation, and at the meantime, it also can be used for gas-liquid separation to the suction line of the system. So it can ensure the compressor work safely. The model with “*” can also be used as Liquid Discharging Bucket.

Design pressure: 1.7 MPa;

Applicative refrigerants: R134a、R22、R407C、R404A、R507A;

Connection application: (a)(b)(c1)(c2)(d)(e)(f)(g)(h)(i)(j)(m1)(m2)(n)。

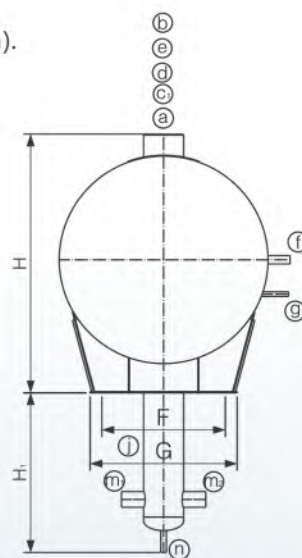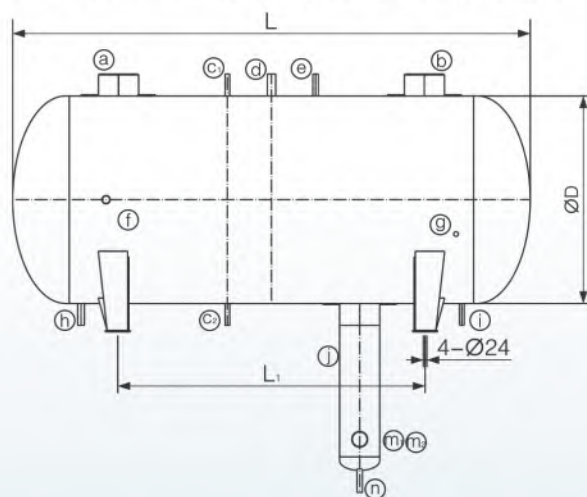

型号 Model	φD (mm)	L (mm)	L1 (mm)	H (mm)	H1 (mm)	F (mm)	G (mm)	液容积 Liquid Vol. (m ³)	总容积 Total Vol. (m ³)	处理量 Handling capacity (m ³ /h)
FNW-1.5	1000	2096	1030	1366	1000	600	760	0.44	1.5	779
FNW-2.0*	1000	2730	1660	1366	1000	600	760	0.58	2.0	779
FNW-2.5	1200	2398	1180	1566	1000	720	880	0.73	2.5	1150
FNW-3.0*	1200	2866	1620	1566	1000	720	880	0.87	3.0	1150
FNW-4.0	1400	2800	1370	1770	1013	840	1000	1.16	4.0	1566
FNW-5.0*	1400	3520	2090	1770	1013	840	1000	1.45	5.0	1566
FNW-6.0	1600	3220	1600	1970	1013	960	1120	1.74	6.0	2045
FNW-7.0*	1600	3770	2150	1970	1013	960	1120	2.03	7.0	2045
FNW-8.5	1800	3590	1764	2224	1266	1120	1280	2.47	8.5	2588
FNW-10*	1800	4260	2430	2224	1266	1120	1280	2.90	10	2588
FNW-12*	2000	4174	2150	2424	1266	1260	1420	3.48	12	3195

FNW Series Fluorine Low-pressure Circulation Barrel FNW系列氟用低压循环桶

连接口 Conn.	用途 Application	FNW-1.5 FNW-2.0	FNW-2.5 FNW-3.0	FNW-4.0 FNW-5.0	FNW-6.0 FNW-7.0	FNW-8.5 FNW-10	FNW-12
a	气进口 Gas inlet	φ159×4.5	φ219×6.0	φ273×7.0	φ325×8.0	φ325×8.0	φ325×8.0
b	气出口 Gas outlet	φ159×4.5	φ219×6.0	φ273×7.0	φ325×8.0	φ325×8.0	φ325×8.0
c1	液位计气相口 Gas-phase conn.of liquid level meter	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0
c2	液位计液相口 Liquid-phase conn. of liquid level meter	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0
d	气相总管 Gas-phase main	φ57×3.5	φ57×3.5	φ57×3.5	φ76×4.0	φ76×4.0	φ76×4.0
e	安全阀口 Conn.for Safety valve	1"-11.5NPT	1"-11.5NPT	1"-11.5NPT	1"-11.5NPT	1"-11.5NPT	1"-11.5NPT
f	供液口 Liquid feeding conn.	φ57×3.5	φ57×3.5	φ57×3.5	φ76×4.0	φ76×4.0	φ76×4.0
g	液位控制口 Liquid level controled conn.	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0
h	液相总管 Liquid-phase main	φ45×3.0	φ45×3.0	φ45×3.0	φ57×3.5	φ57×3.5	φ57×3.5
i	回油口 Oil return conn.	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0
j	集液管 Liquid collector pipe	φ219×6.0	φ219×6.0	φ273×7.0	φ273×7.0	φ325×8.0	φ325×8.0
m1	液出口 Liquid outlet	φ89×4.0	φ89×4.0	φ108×4.0	φ108×4.0	φ133×4.0	φ133×4.0
m2	液出口 Liquid outlet	φ89×4.0	φ89×4.0	φ108×4.0	φ108×4.0	φ133×4.0	φ133×4.0
n	排污口 Drain outlet	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0	φ32×3.0

备注:

- 1.处理量: R22制冷剂 (如使用其他制冷剂请与O&F技术部联系) 在+40℃冷凝温度允许压缩机最大理论排量VH(m/h)
- 2.不带 "*" 的氟用低压循环桶: 适用于①不采用热氟融霜的冷库②使用水融霜冷风机作为蒸发器的冷库③速冻机
- 3.带 "*" 的氟用低压循环桶: 适用于①采用热氟融霜的冷库②使用热氟融霜冷风机作为蒸发器的冷库③速冻库

Remark:

1. Handling capacity: With refrigerant R22 (if you would like to use other kinds of refrigeants, please contact with O&F technology department) and at +40℃ condensing temperature, the max.theoretical displacement VH (m3/h) of the compressor.
2. Model without "*" Fluorine Low-pressure Circulation Barrel: Available for ① The cold storage without heat fluo-rine defrosting② The cold storage take water defrosting cooler as evaporator ③Quick-freeze machine
3. Model with "*" Fluorine Low-pressure Circulation Barrel: Available for ①The cold storage with heat fluorine defr-osting② The cold storage take heat fluorine cooler as evaporator ③Quick-freeze storage

氟泵供液制冷系统

以前氟利昂系统绝大部分采用的是膨胀阀供液干式蒸发，其主要原因有：

- 1、膨胀阀供液干式蒸发系统比较简单，分离设备少，系统充液量也少，自动化程度高。
- 2、原来氟利昂系统只有在小型系统中应用，小型系统对能效比的要求并不高，所以其效率低的缺点并不致命。

随着氟利昂系统越来越多的应用到大、中型制冷系统中，特别是使用排管蒸发器的大、中型冷藏库、格架式速冻库和速冻机等制冷装置，膨胀阀供液干式蒸发的缺点就凸显出来了：

- 1、高压液体在节流过程中产生的闪发气体也送入蒸发器，影响传热效果，蒸发器的实际利用面积减少。
- 2、当蒸发器负荷发生变化或向蒸发器的供液量与蒸发量的平衡关系严重失调时，制冷压缩机极易发生湿行程，或造成降温困难、回气过热、压缩机排气温度升高。
- 3、供液量受冷凝压力和蒸发压力差值变化影响引起供液量失调。
- 4、对管路设计和安装要求比较高，否则会出现回油困难、供液不均、蒸发器效率低等问题。
- 5、系统管道长，压力降大，将使吸气压力降低，吸入气体比容增大，导致输气系数下降，直接影响到制冷能力和增加了压缩机的功耗。
- 6、回气管道和压缩机直接连接，在制造和安装过程中进入蒸发器和管道中的脏物容易进入压缩机造成压缩机的损坏。

氟泵供液制冷系统利用氟泵将低压循环桶内经过节流的低温液体，以数倍于蒸发量的流量，直接输送到各冷间的蒸发器中去。在蒸发器中一部分氟液蒸发气化，多余的液体随同气体回至低压循环桶，经分离后，气体被制冷压缩机吸走，留在桶内的液体连同从高压储液器补充来的（相当于蒸发量），又由氟泵送至蒸发器进行强制再循环。


氟泵供液制冷系统的优点：

- 1、蒸发器热交换效率高。蒸发器内有数倍于蒸发量的液体使管内流速加大，管内表面能得到充分的润湿，加之液体的冲刷，减轻了润滑油对管壁换热形成的影响。
- 2、安全性好。低压循环桶有足够大的容积进行气液分离，不容易发生湿行程。
- 3、制冷效率高。低压循环桶设在机房，离压缩机近，吸气管内压力损失小，吸气过热度也小，有利于提高制冷效率。
- 4、安全可靠地解决了排管热氟融霜。低压循环桶可代替气液分离器和排液桶，通过调节站可实现部分冷间融霜的同时大部分冷间继续制冷循环，简化了蒸发器融霜程序，提高了效率。
- 5、系统停止运转后，蒸发器管内氟液仍能继续蒸发，所以有一定的“冷惰性”作用。
- 6、回气管道不直接和压缩机连接，在制造和安装过程中进入蒸发器和管道中的脏物直接进入低压循环桶，可通过排污阀将脏物排出，不会因脏物进入压缩机造成压缩机的损坏。

氟泵供液制冷系统 Fluorine Pump Feed Liquid Refrigeration System


循环桶微压差回油 Low-pressure circulation barrel

制冷压缩冷凝机组
Refrigerating compression condensing unit

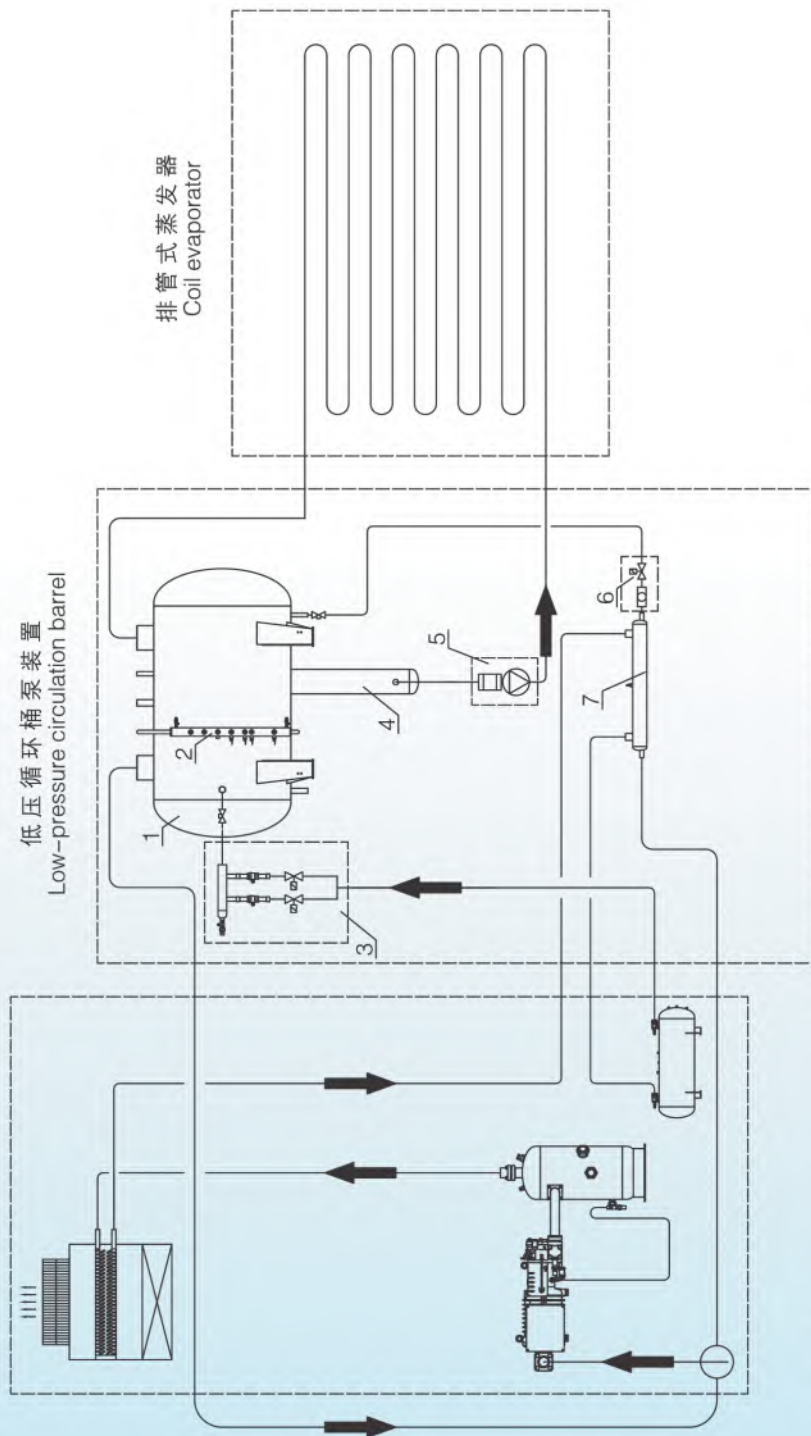

排管式蒸发器
Coil evaporator

- | | |
|---|---|
| 1、低压循环桶 Low-pressure circulation barrel | 5、氟泵 Fluorine pump |
| 2、光电液位显示器 Photoelectric liquid level display controller | 6、脉冲式回油电磁阀 Impulse type oil return solenoid valve |
| 3、变流量节流装置 Variable flow throttle valve equipment | 7、回油热交换器 Oil return heat exchanger |
| 4、集液管 Liquid collector | |

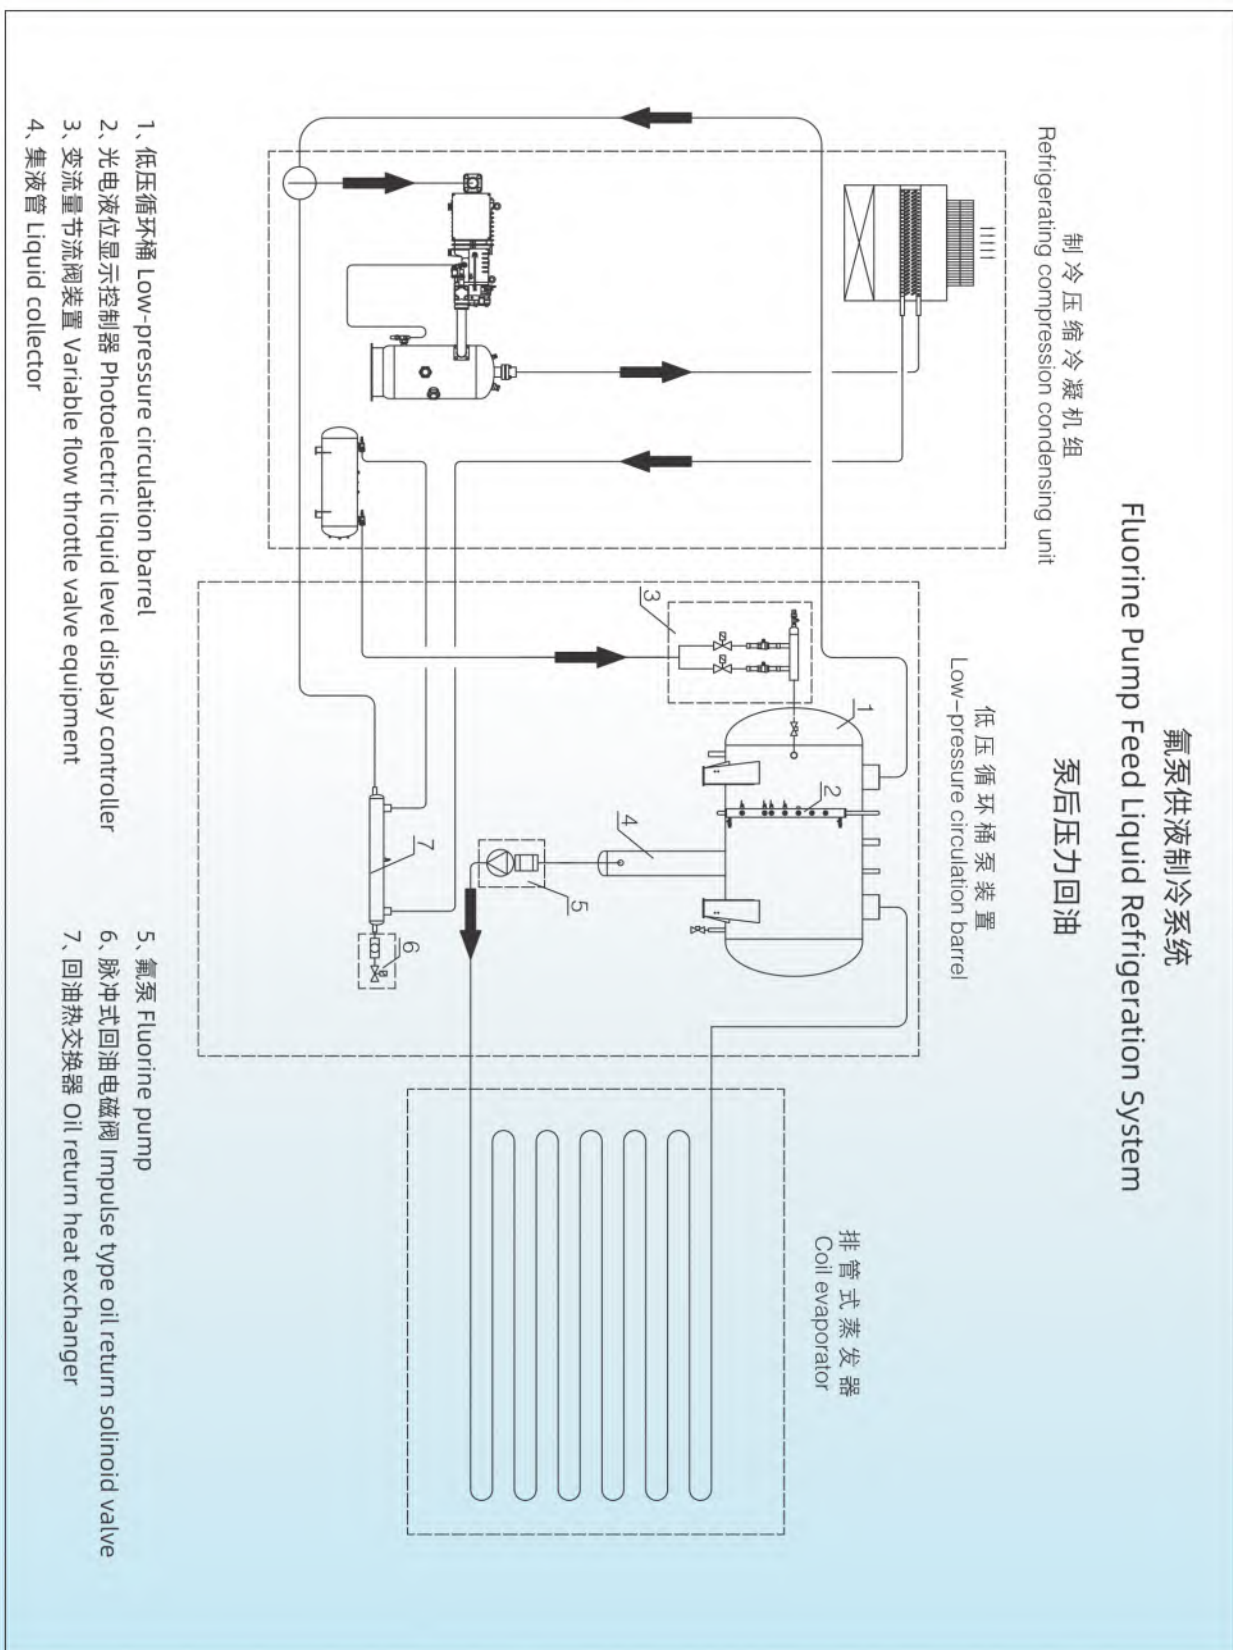

EHC Series Vertical Siphon Receiver EHC系列立式虹吸储液器

EHC立式虹吸储液器是将虹吸罐和储液器集成为一台制冷容器, 其结构紧凑, 可方便地安装在机组上, 减少设备成本和工程现场施工成本。



★ 请注意: 选配板式油冷却器时, 制冷剂侧进出口压降要明显小于虹吸罐液面和板式油冷却器高度差产生的静压。

- 设计压力: 2.5MPa;
- 适用制冷剂: R134a, R22, R407C, R404A, R507A;

EHC series vertical siphon receiver is a collection of siphon tank and liquid receiver into one refrigeration container, its compact structure, can be easily installed on the compressor unit, reducing the equipment cost and engineering site construction cost.

★ Please note: when selecting the plate heat exchanger as oil cooler, the pressure drop at the inlet and outlet of the refrigerant side should be significantly less than the static pressure generated by the height difference of the siphon tank liquid level and the plate heat exchanger oil cooler.

- Design pressure: 2.5MPa;
- Applicable refrigerants: R134a, R22, R407C, R404A, R507A;

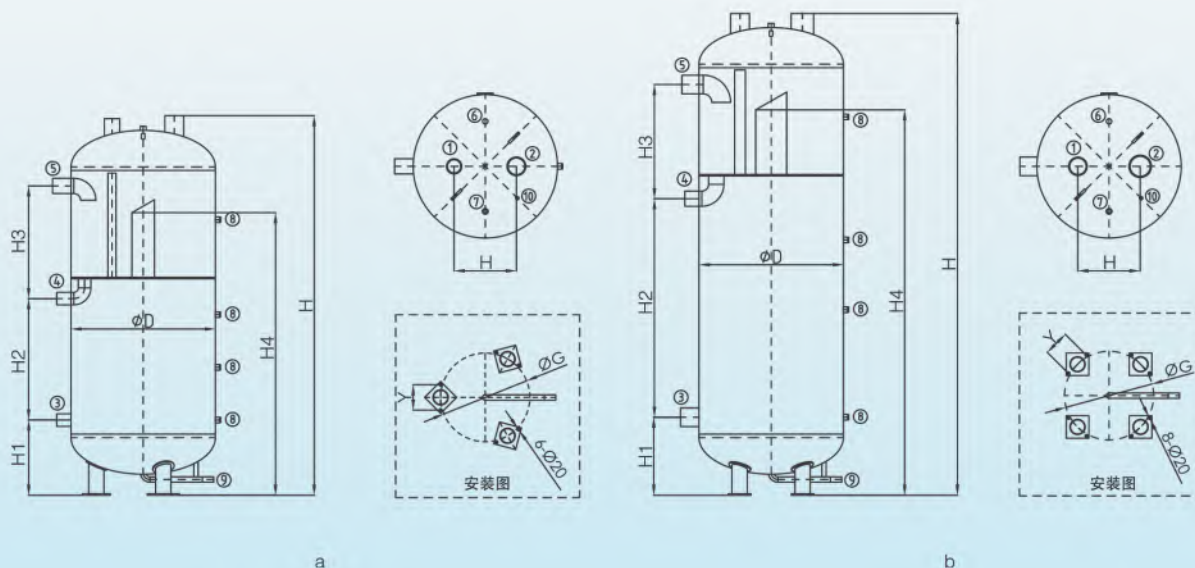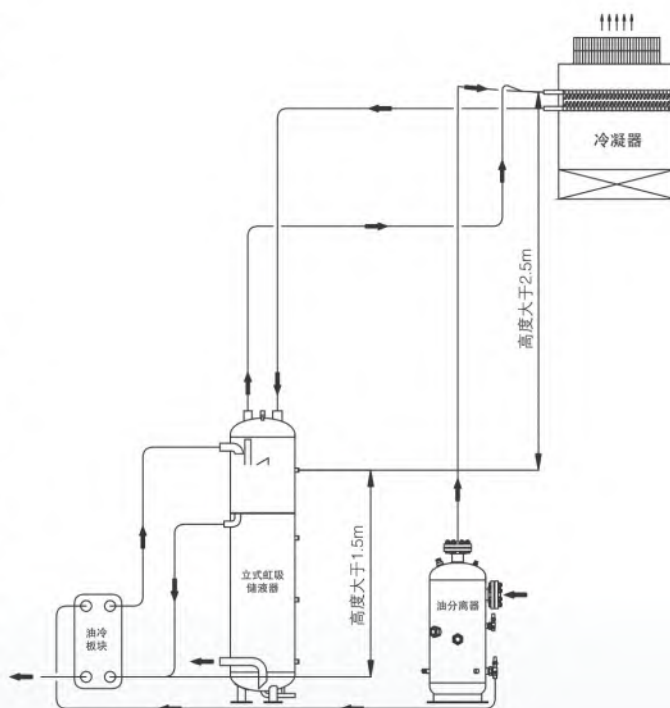


		EHC-0.7	EHC-0.9	EHC-1.2	EHC-1.5	EHC-1.8	EHC-2.5	EHC-4.5
常规数据 Data	虹吸罐 液容积 (l)	130	180	230	290	360	360	520
	储液器 容积 (l)	450	590	730	850	1000	1800	3200
	总容积 (l)	680	900	1170	1450	1770	2550	4480
尺寸 Dimension	ΦD(mm)	612	716	816	916	1020	1020	1224
	H(mm)	2697	2696	2698	2682	2700	3695	4499
	H1(mm)	391	438	463	498	535	555	647
	H2(mm)	1262	1187	1074	949	864	1823	2268
	H3(mm)	698	698	741	786	801	812	947
	H4(mm)	2224	2196	2126	2036	2010	3010	3587
	A(mm)	280	300	400	400	440	440	600
	Y(mm)	135	135	160	160	180	180	180
	ΦG(mm)	400	460	520	580	630	630	790
接口 Connection	1(mm)	Φ76×4.0 BW	Φ76×4.0 BW	Φ89×4.0 BW	Φ89×4.0 BW	Φ108×4.0 BW	Φ133×4.0 BW	Φ159×4.5 BW
	2(mm)	Φ89×4.0 BW	Φ89×4.0 BW	Φ108×4.0 BW	Φ108×4.0 BW	Φ133×4.0 BW	Φ159×4.5 BW	Φ219×6.0 BW
	3(mm)	Φ76×4.0 BW	Φ76×4.0 BW	Φ89×4.0 BW	Φ89×4.0 BW	Φ89×4.0 BW	Φ133×4.0 BW	Φ159×4.5 BW
	4(mm)	Φ57×3.5 BW	Φ57×3.5 BW	Φ76×4.0 BW	Φ76×4.0 BW	Φ89×4.0 BW	Φ108×4.0 BW	Φ133×4.0 BW
	5(mm)	Φ76×4.0 BW	Φ76×4.0 BW	Φ89×4.0 BW	Φ89×4.0 BW	Φ108×4.0 BW	Φ133×4.0 BW	Φ159×4.5 BW
	6(mm)	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW
	7(NPT)	1"	1"	1"	1"	1"	1"	1"
	8(mm)	D24	D24	D24	D24	D24	D24	D24
	9(mm)	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW	Φ38×3.0 BW
	10(NPT)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
图例 Fig		a	a	a	a	a	b	b
连接口 用途 Application of the Conn	1	气化后的制冷剂流回冷凝器进气口 Vaporized refrigerant flow to the gas inlet of condenser						
	2	冷凝后制冷剂进口 Inlet of the refrigerant after condensation						
	3	储液器出液口 Outlet of liquid receiver						
	4	去油冷却器口 Connection to oil cooler						
	5	经油冷却器吸热后制冷剂接口 Conn. for the refrigerant after adsorbing the heat in oil cooler						
	6	气相平衡口 Gas-phase balance connection						
	7	安全阀口 Conn. for safety valve						
	8	视液镜 Sight glass						
	9	排污口 Drain						
	10	检修口 Conn. for check valve						

WHX Series Horizontal Siphon Tank WHX系列卧式虹吸罐


WHX卧式虹吸罐适用于冷凝器与板式油冷却器之间有足够高度差的制冷系统上。虹吸罐内的制冷剂液体靠重力从虹吸罐中流出, 进入位置较低的板式油冷却器, 吸收逆向流动的润滑油中的热量, 一部分制冷剂液体吸热后汽化, 通过虹吸罐进入冷凝器的进气口, 与压缩机排气混合经冷凝器后, 气态制冷剂重新被液化流回虹吸罐。

- WHX-50,WHX-65,WHX-80,WHX-100设计压力: 2.9MPa;
- WHX-125,WHX-150设计压力: 2.5MPa;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

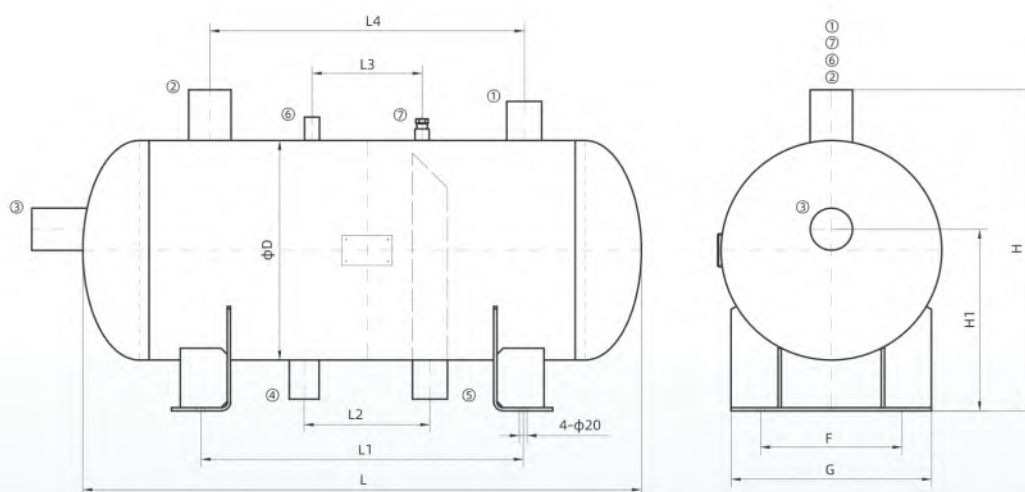

The WHX series horizontal siphon tank is designed for refrigeration systems where there's sufficient vertical height difference between the condenser and plate oil cooler. The refrigerant liquid flows out of the siphon tank by gravity, entering the lower-positioned plate oil cooler to absorb heat from the counter-flowing lubricating oil. After absorbing heat, part of the refrigerant vaporizes and enters the condenser's inlet through the siphon tank. It mixes with the compressor's discharge gas, undergoes condensation, and then re-liquefies before flowing back to the siphon tank.

- Design pressure of the WHX-50, WHX-65, WHX-80, and WHX-100: 2.9MPa;
- Design pressure of the WHX-125,WHX-150:2.5MPa;
- Applicable refrigerants: R134a, R22, R407C, R404A, and R507A.

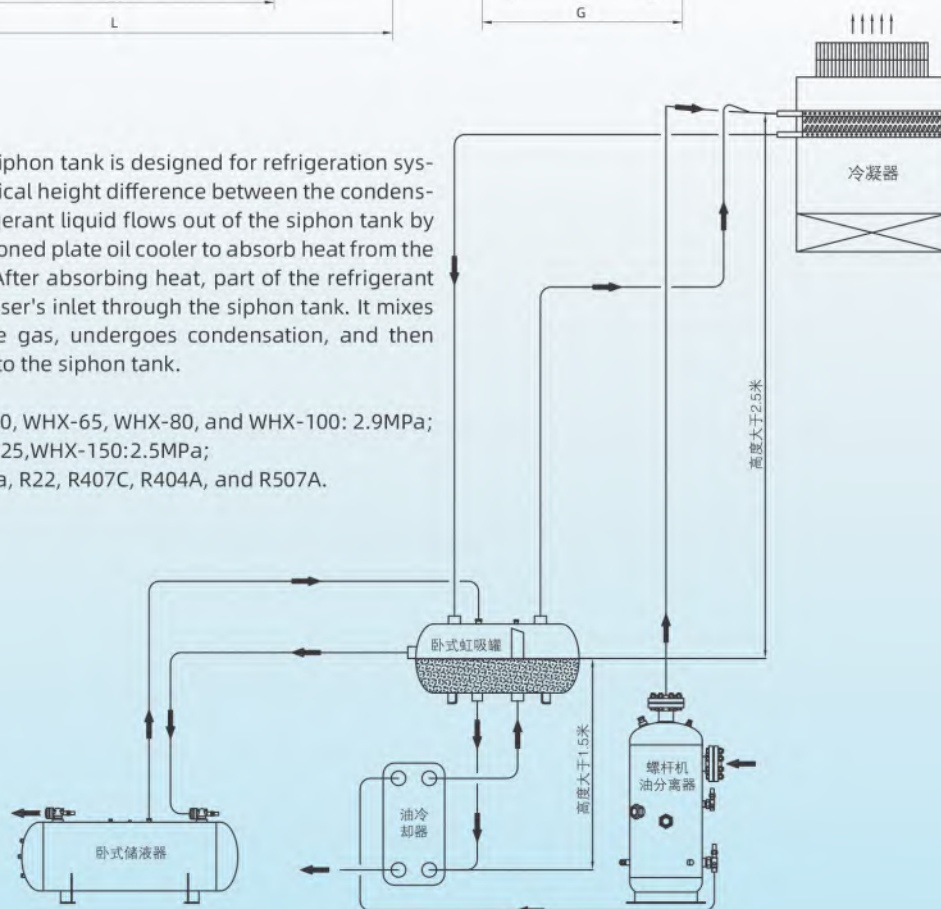

			WHX-50	WHX-65	WHX-80	WHX-100	WHX-125	WHX-150
常规数据 Data	液容积 Liquid vol.	l	20	47	87	155	220	330
	总容积 Total vol.	l	40	95	175	310	440	660
尺寸 Dimension	φD	mm	273	377	462	562	612	716
	L	mm	853	985	1198	1422	1672	1846
	L1	mm	520	580	720	820	1050	1160
	L2	mm	180	200	240	320	400	450
	L3	mm	180	200	240	280	340	380
	L4	mm	480	520	640	800	940	1040
	H	mm	453	577	692	822	892	996
	H1	mm	265	327	406	465	523	588
	F	mm	180	250	290	360	400	460
	G	mm	260	350	420	510	550	640
接口 Connection	1	mm	φ45 BW	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW
	2	mm	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW	φ159 BW
	3	mm	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW	φ159 BW
	4	mm	φ38 BW	φ45 BW	φ57 BW	φ76 BW	φ89 BW	φ108 BW
	5	mm	φ45 BW	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW
	6	UN	φ32 BW	φ32 BW	φ32 BW	φ38 BW	φ38 BW	φ38 BW
	7	NPT	1/2"	1/2"	1/2"	1/2"	1/2"	3/4"
连接口 用途 Application of the Conn	1	--	气化后的制冷剂流回冷凝器进气口 Vaporized refrigerant flow to the gas inlet of condenser					
	2	--	冷凝后制冷剂进口 Inlet of the refrigerant after condensation					
	3	--	去储液器接口 Connection to liquid receiver					
	4	--	去油冷却器接口 Connection to oil cooler					
	5	--	经油冷却器吸热后制冷剂接口 Conn. for the refrigerant after adsorbing the heat in oil cooler					
	6	--	气相平衡接口 Gas-phase balance connection					
	7	--	工艺阀接口 Process valve connection					

WHX Series Horizontal Siphon Tank Refrigerating Capacity Table WHX系列卧式虹吸罐制冷能力表

WHX系列卧式虹吸罐制冷能力表 WHX Series Horizontal Siphon Tank Refrigerating Capacity Table									
型号 Model	蒸发温度 Evaporating temp.	-10°C	-15°C	-20°C	-25°C	-30°C	-35°C	-40°C	最大油冷负荷 Max. Oil-cooled load (KW)
WHX-50	R22	310	360	430	510	610	750	940	38.6
	R404A	160	210	240	290	340	410	500	24.1
	R507A	160	190	230	270	320	380	460	23.4
WHX-65	R22	620	720	850	1010	1220	1500	1880	57.3
	R404A	330	410	480	570	680	820	990	35.8
	R507A	320	390	460	530	630	760	920	34.7
WHX-80	R22	840	980	1150	1370	1660	2030	2540	94.2
	R404A	440	560	660	780	920	1110	1350	58.8
	R507A	430	530	620	730	860	1030	1250	57.0
WHX-100	R22	1180	1380	1630	1940	2350	2880	3600	174.0
	R404A	630	800	930	1100	1300	1570	1910	108.0
	R507A	610	750	880	1030	1220	1460	1760	105.0
WHX-125	R22	1930	2250	2660	3160	3820	4680	5860	247.0
	R404A	1020	1300	1520	1790	2120	2550	3110	154.0
	R507A	990	1230	1430	1680	1980	2370	2870	149.0
WHX-150	R22	2770	3230	3810	4540	5480	6720	8400	376.0
	R404A	1470	1870	2180	2570	3050	3660	4460	235.0
	R507A	1430	1760	2050	2410	2850	3400	4120	228.0
注: 以上数据基于冷凝温度40°C, 冷凝器后过冷度5K, 吸气过热度10K, 系统带经济器运行, 允许压缩机最大理论排气量VH (m³/h)。 Remark: The data above on the basis of condensing temperature 40°C, degree of super-cooling after condenser 5K, degree of super-heating of suction 10K, system running with economizer, admissible max. theoretical exhaust volume of compressor VH (m³/h)									

LHX立式虹吸罐可方便地安装在机组上, 减少设备成本和工程现场施工成本。


★ 请注意: 选配板式油冷却器时, 制冷剂侧进出口压降要明显小于虹吸罐液面和板式油冷却器高度差产生的静压。

- LHX-50,LHX-65,LHX-80设计压力: 2.9MPa;
- LHX-100,LHX-125,LHX-150设计压力: 2.5MPa;
- 适用制冷剂: R134a、R407C、R404A、R507A。

LHX Series vertical siphon tank can be fixed in the unit expediently, it will reduce the equipment cost and project site construction cost.


★ Caution please: When you use plate-type oil cooler, the pressure drop of the refrigerant inlet and outlet side shall be obviously lower than the net pressure caused by the height difference between the liquid level in siphon tank and the plate-type oil cooler.

- LHX-50,LHX-65,LHX-80Design pressure:2.9MPa;
- LHX-100,LHX-125,LHX-150design pressure:2.5MPa;
- Applicable refrigerant: R134a,R407C,R404A,R507A。

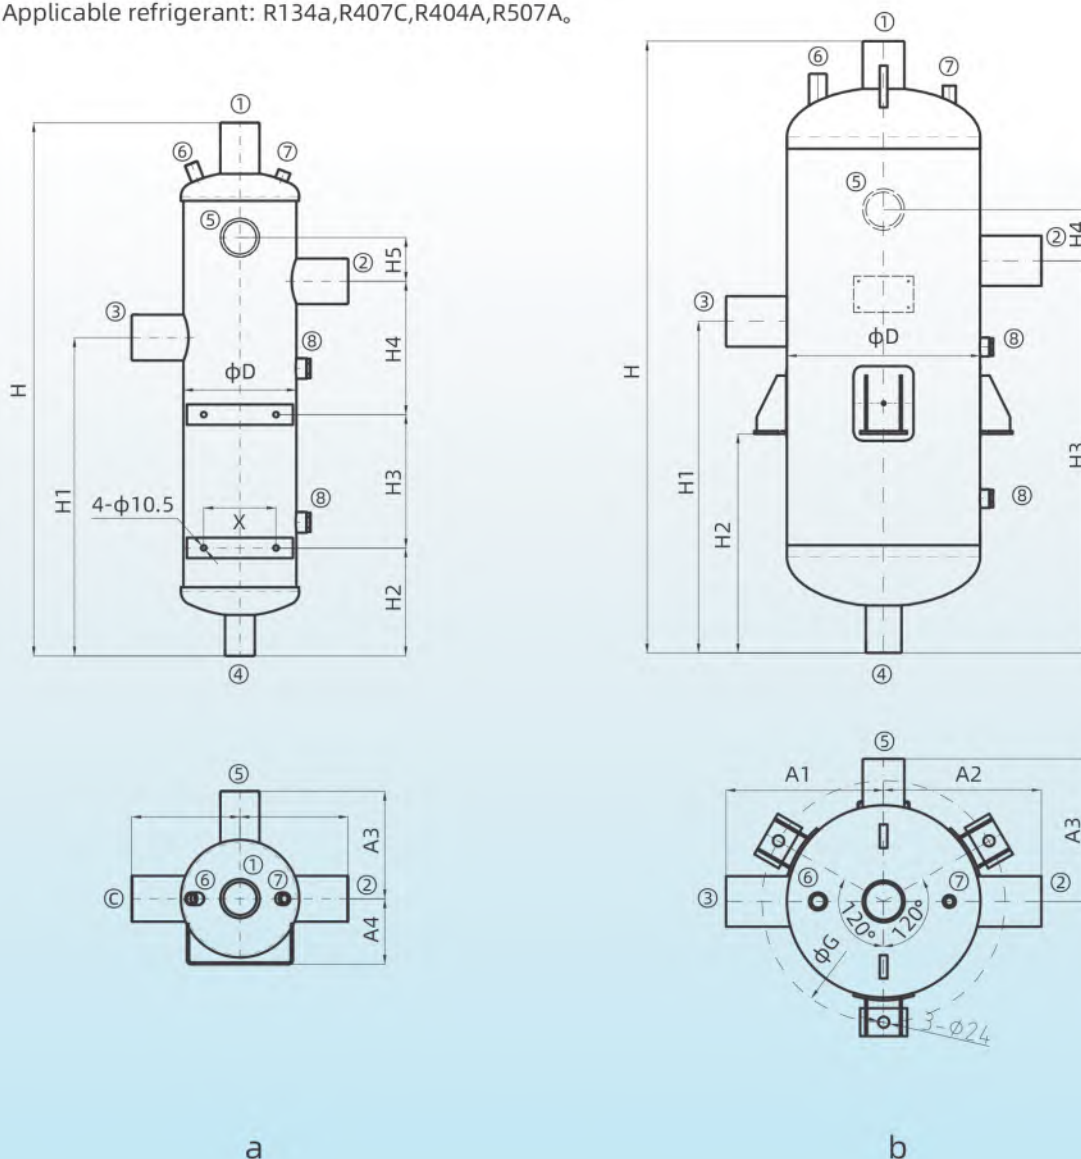

LHX Series Vertical Siphon Tank LHX系列立式虹吸罐

			LHX-50	LHX-65	LHX-80	LHX-100	LHX-125	LHX-150
常规数据 Data	液容积 Liquid vol.	l	11.0	14.7	16.8	65	110	182
	总容积 Total vol.	l	18	21	29	130	230	382
尺寸 Dimension	ΦD	mm	165	165	219	412	512	612
	H	mm	1085	1279	1040	1312	1492	1722
	H1	mm	663	880	621	711	776	911
	H2	mm	168	210	211	470	540	680
	H3	mm	365	380	260	841	926	1081
	H4	mm	240	400	260	110	130	160
	H5	mm	80	80	85	—	—	—
	A1	mm	163	183	210	336	386	456
	A2	mm	163	183	210	336	386	456
	A3	mm	163	163	210	306	386	436
	A4	mm	100	100	128	—	—	—
	X	mm	80	80	140	—	—	—
	ΦG	mm	—	—	—	518	619	720
接口 Connection	1	mm	φ45 BW	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW
	2	mm	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW	φ159 BW
	3	mm	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW	φ159 BW
	4	mm	φ38 BW	φ45 BW	φ57 BW	φ76 BW	φ89 BW	φ108 BW
	5	mm	φ45 BW	φ57 BW	φ76 BW	φ89 BW	φ108 BW	φ133 BW
	6	mm	Φ25 BW	Φ25 BW	Φ25 BW	φ38 BW	φ38 BW	φ38 BW
	7	NPT	3/8"	3/8"	3/8"	1/2"	1/2"	1/2"
连接口用途 Application of the Conn	1	--	气化后的制冷剂流回冷凝器进气口 Vaporized refrigerant flow to the gas inlet of condenser					
	2	--	冷凝后制冷剂进口 Inlet of the refrigerant after condensation					
	3	--	去储液器接口Connection to liquid receiver					
	4	--	去油冷却器接口Connection to oil cooler					
	5	--	经油冷却器吸热后制冷剂接口 Conn. for the refrigerant after adsorbing the heat in oil cooler					
	6	--	气相平衡接口Gas-phase balance connection					
	7	--	工艺阀接口 Process valve connection					
	8	--	视液镜Sigh glass					

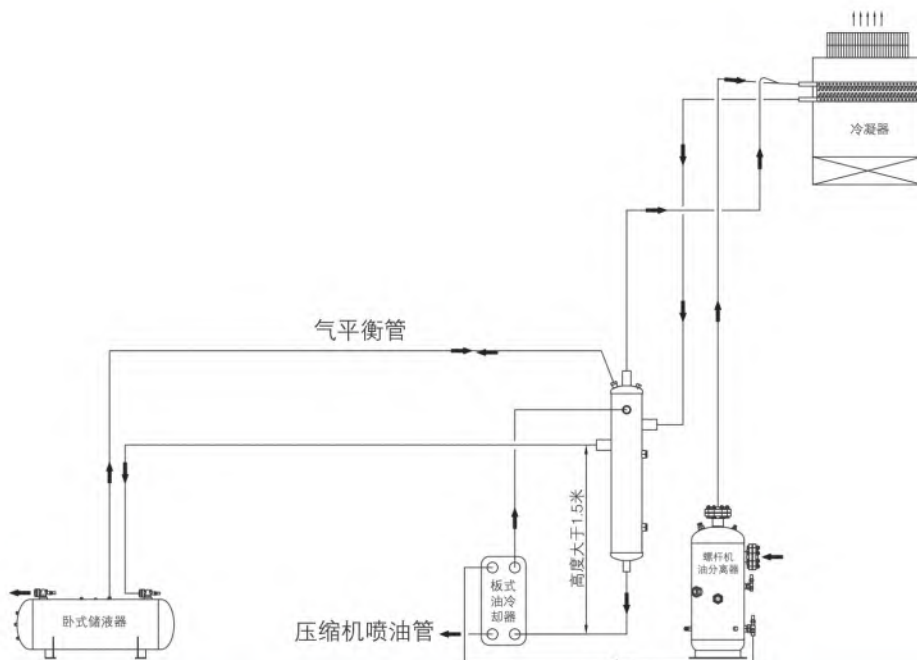

WHX系列卧式虹吸罐制冷能力表
WHX Series Horizontal Siphon Tank Refrigerating Capacity Table

型号 Model	蒸发温度 Evaporating temp.	-10℃	-15℃	-20℃	-25℃	-30℃	-35℃	-40℃	最大油冷负荷 Max. Oil-cooled load (KW)
LHX-50	R404A	160	210	240	290	340	410	500	24.1
	R507A	160	190	230	270	320	380	460	23.4
LHX-65	R404A	330	410	480	570	680	820	990	35.8
	R507A	320	390	460	530	630	760	920	34.7
LHX-80	R404A	440	560	660	780	920	1110	1350	58.8
	R507A	430	530	620	730	860	1030	1250	57.0
LHX-100	R404A	630	800	930	1100	1300	1570	1910	108.0
	R507A	610	750	880	1030	1220	1460	1760	105.0
LHX-125	R404A	1020	1300	1520	1790	2120	2550	3110	154.0
	R507A	990	1230	1430	1680	1980	2370	2870	149.0
LHX-150	R404A	1470	1870	2180	2570	3050	3660	4460	235.0
	R507A	1430	1760	2050	2410	2850	3400	4120	228.0

注: 以上数据基于冷凝温度40℃, 冷凝器后过冷度5K, 吸气过热度10K, 系统带经济器运行, 允许压缩机最大理论排气量VH (m³/h)。
Remark: The data above on the basis of condensing temperature 40℃, degree of super-cooling after condenser 5K, degree of super-heating of suction 10K, system running with economizer, admissible max. theoretical exhaust volume of compressor VH (m³/h)

FAO Series Siphon Oil-cooled Plate Heat Exchanger FAO系列虹吸油冷板式换热器

- 材质: 316L
- 最高许可工作压力: 30 bar
- 适用介质: R22,R407C,R404A,R507A,冷冻机油
- Material: 316L
- Max. allowed working pressure: 30 bar
- Applicative refrigerants: R22, R407C, R404A, R507A, Refrigeration oil


型号 Model	油冷负荷 Oil-cooled load (KW)	油侧进/出口尺寸 Inlet/Outlet of oil side (mm)	制冷剂侧进/出口尺寸 Inlet/Outlet of refrigerant side (mm)
FAO-010	10	φ35 ODS(φ38*3 BW)	φ35 ODS(φ38*3 BW)/φ42 ODS(φ45*3 BW)
FAO-020	20	φ35 ODS(φ38*3 BW)	φ35 ODS(φ38*3 BW)/φ42 ODS(φ45*3 BW)
FAO-030	30	φ42 ODS(φ45*3 BW)	φ35 ODS(φ38*3 BW)/φ42 ODS(φ45*3 BW)
FAO-040	40	φ42 ODS(φ45*3 BW)	φ42 ODS(φ45*3 BW)/φ54 ODS(φ57*3.5 BW)
FAO-050	50	φ42 ODS(φ45*3 BW)	φ42 ODS(φ45*3 BW)/φ54 ODS(φ57*3.5 BW)
FAO-060	60	φ54 ODS(φ57*3.5 BW)	φ42 ODS(φ45*3 BW)/φ54 ODS(φ57*3.5 BW)
FAO-070	70	φ54 ODS(φ57*3.5 BW)	φ54 ODS(φ57*3.5 BW)/φ76*4 BW
FAO-080	80	φ54 ODS(φ57*3.5 BW)	φ54 ODS(φ57*3.5 BW)/φ76*4 BW
FAO-090	90	φ54 ODS(φ57*3.5 BW)	φ54 ODS(φ57*3.5 BW)/φ76*4 BW
FAO-100	100	φ54 ODS(φ57*3.5 BW)	φ54 ODS(φ57*3.5 BW)/φ76*4 BW
FAO-120	120	φ76*4 BW	φ76*4 BW/φ89*4 BW
FAO-140	140	φ76*4 BW	φ89*4 BW/φ108*4 BW
FAO-160	160	φ76*4 BW	φ89*4 BW/φ108*4 BW
FAO-180	180	φ76*4 BW	φ89*4 BW/φ108*4 BW
FAO-200	200	φ89*4 BW	φ89*4 BW/φ108*4 BW
FAO-250	250	φ89*4 BW	φ89*4 BW/φ108*4 BW

备注:

- 1、以上数据基于: 油进口温度: 80°C, 油出口温度: 60°C, 润滑油: 150POE, 制冷剂温度40°C。
- 2、H1 > 1.5m: 虹吸罐液面和板式油冷却器高度差
- 3、H2 > 2.5m: 冷凝器进口和虹吸罐液面的高度差
- 4、BW: 对焊焊接; ODS: 插入式焊接

Remark:

- 1、The data above on the basis of oil inlet temperature: 80°C, oil outlet temperature: 60°C, lubricant: 150POE, refrigerant temperature: 40°C.
- 2、H1 > 1.5m: Height difference between the liquid level in siphon tank and plate-type oil cooler
- 3、H2 > 2.5m: Height difference between the inlet of condenser and liquid level in siphon tank
- 4、BW: Butt-jointed welding; ODS: Plug-in welding

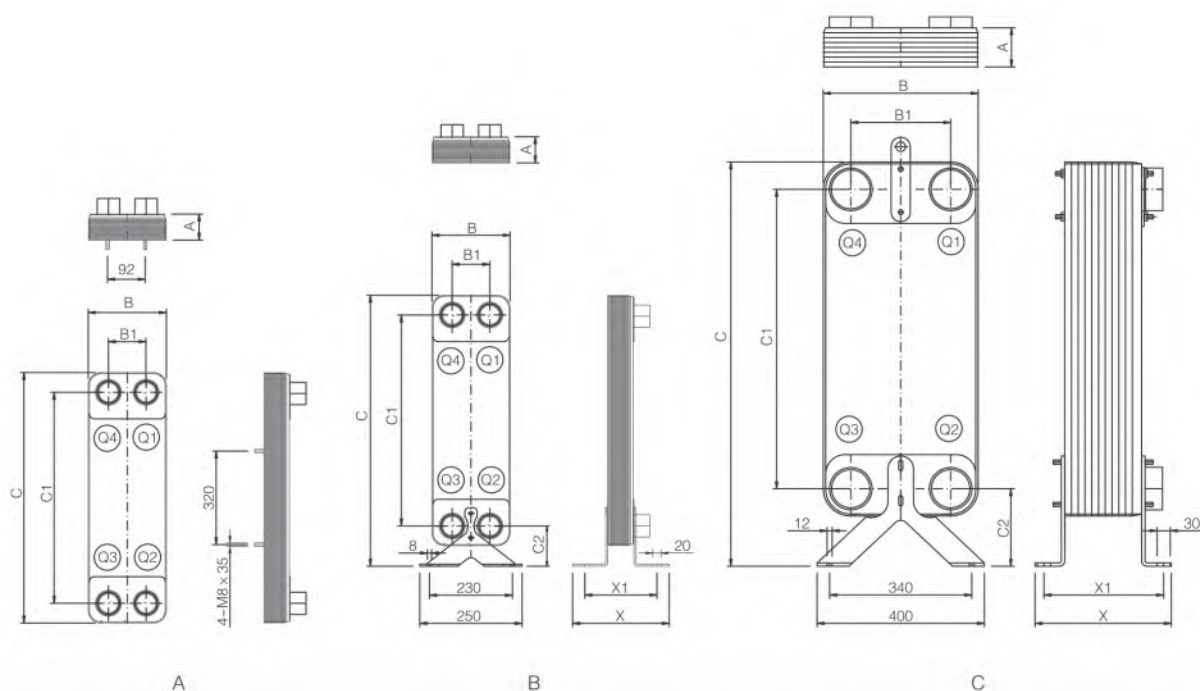


型号 Model	A (mm)	B (mm)	B1 (mm)	C (mm)	C1 (mm)	C2 (mm)	X1 (mm)	X2 (mm)	图例 Fig.
FAO-010	57	191	92	616	519	--	--	--	a
FAO-020	91	191	92	616	519	--	--	--	a
FAO-030	123	191	92	616	519	105	295	235	b
FAO-040	158	191	92	616	519	105	330	270	b
FAO-050	197	191	92	616	519	105	369	309	b
FAO-060	231	191	92	616	519	105	403	343	b
FAO-070	147	319	205	734	622	105	307	217	c
FAO-080	164	319	205	734	622	178	324	234	c
FAO-090	181	319	205	734	622	178	341	251	c
FAO-100	203	319	205	734	622	178	363	273	c
FAO-120	237	319	205	734	622	178	397	307	c
FAO-140	270	319	205	734	622	178	430	340	c
FAO-160	309	319	205	734	622	178	469	379	c
FAO-180	343	319	205	734	622	178	503	413	c
FAO-200	377	319	205	734	622	178	537	447	c
FAO-250	461	319	205	734	622	178	621	531	c

接口用途Connection usage:

Q1:油进口 Oil inlet Q2:油出口 Oil outlet Q3:制冷剂进口Refrigerant inlet Q4:制冷剂出口Refrigerant outlet

FV Series Safety Valve FV系列安全阀

- 适用制冷剂: CFC, HCFC, HFC
- 运行温度范围: -40°C~150°C
- 整定压力: 欧达法斯克标准产品和根据客户要求订制。
- Applicative refrigerants: CFC, HCFC, HFC
- Running temperature: -40°C~150°C
- Set-pressure: O&F standard products and also can be manufactured as customers' requirements.
- 欧达法斯克压力容器安全阀接口标准:
- 容积 < 50L的, 安全阀接口 3/8" -18NPT;
- 容积 ≥ 50L 且 < 500L的, 安全阀接口 1/2" -14NPT;
- 容积 ≥ 500L 且 < 1000L的, 安全阀接口 3/4" -14NPT;
- 容积 ≥ 1000L的, 安全阀接口 1" -11.5NPT.
- O&F standard of safety valve connection on pressure vessels:
- The volume < 50L, the safety valve connection is 3/8" -18NPT;
- the volume ≥ 50L & < 500L, the safety valve connection is 1/2" -14NPT;
- the volume ≥ 500L & < 1000L, the safety valve connection is 3/4" -14NPT
- the volume ≥ 1000L, the safety valve connection is 1" -11.5NPT.

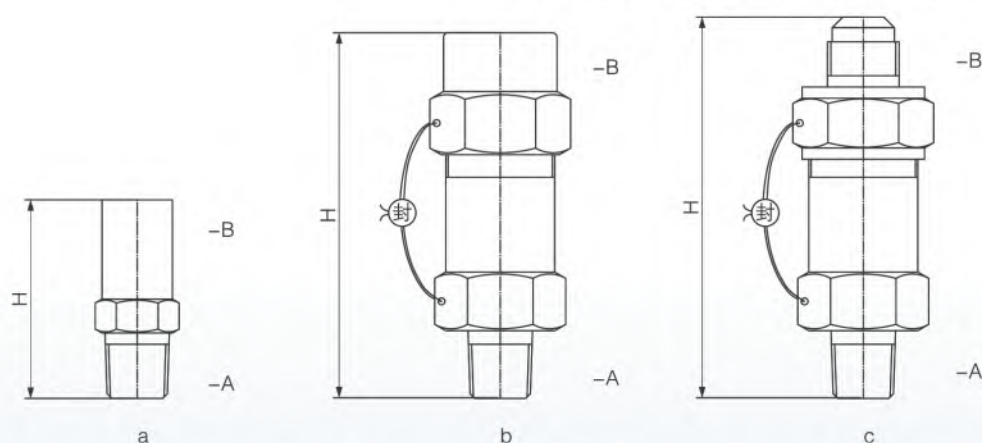


型号 Model	喉径 (流通直径) Throat diameter (Flow diameter) (mm)	H (mm)	阀体六角尺寸 Valve body Six angle size (mm)	A (进口接口形式) (Inlet form)	B (出口接口形式) (Outlet form)	图例 Fig.
FV04-A100	φ4	40	S16	1/8"MNPT	无螺纹 No Thread	a
FV04-A200	φ4	44	S16	1/4"MNPT	无螺纹 No Thread	a
FV06-A2B2	φ6	81	S25	1/4"MNPT	1/4" FNPT	b
FV06-A2S3	φ6	84	S25	1/4"MNPT	3/8"MSAE	c
FV08-A3B3	φ8	83	S25	3/8"MNPT	3/8" FNPT	b
FV08-A3S3	φ8	87	S25	3/8"MNPT	3/8"MSAE	c
FV11-A4B4	φ11	104	S32	1/2"MNPT	1/2"FNPT	b
FV11-A4S4	φ11	113	S32	1/2" MNPT	1/2"MSAE	c
FV11-A6B6	φ11	108	S32	3/4"MNPT	3/4"FNPT	b
FV18-A8B8	φ18	121	S48	1"MNPT	1"FNPT	b

欧达法斯克标准整定压力: O&F standard set-pressure
 1, 235 psig 2, 300 psig 3, 350 psig 4, 400 psig 5, 425 psig 6, 450 psig
 7, 1.7 MPa 8, 2.1 MPa 9, 2.4 MPa 10, 2.8 MPa 11, 2.9 MPa 12, 3.1 MPa

- 最高许可工作压力：4.8 MPa；
- 运行温度范围：-40℃ ~ +150℃；
- 阀体材料和表面镀层：碳钢，表面镀锡；
- 适用制冷剂：R134a,R22,R407C,R404A,R507A,R410A；
- 阀门带铅封孔，安全阀检验完毕后请装上铅封以免误操作。
- Max. running pressure: 4.8 MPa；
- Applicative temperature: -40℃ ~ +150℃；
- Material of the valve body and material of stuffing : carbon steel, flexible graphite；
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A, R410A.
- The valve has a lead-sealed hole, after the safety valve inspected , please install the lead seal to avoid misoperation.


型号 Model	接口尺寸	最小流通直径	L (mm)	W (mm)
FZ-02	1/4" NPT	φ6	110	32
FZ-03	3/8" NPT	φ8	110	32
FZ-04	1/2" NPT	φ13	122	35
FZ-06	3/4" NPT	φ16	136	41
FZ-08	1" NPT	φ23	185	52

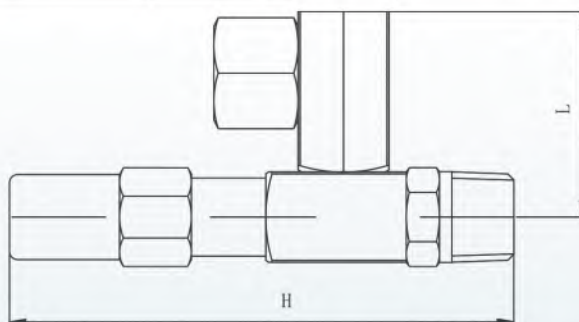

F-W Series Changeover valve for Safety Valve


F-W系列安全阀用切换阀

- 最大运行压力：4.8 MPa；
- 适用温度：-40℃ ~ +150℃；
- 阀体材料和表面镀层：碳钢，表面镀锡；
- 适用制冷剂：R134a,R22,R407C,R404A,R507A,R410A。
- Max. running pressure: 4.8 MPa；
- Applicative temperature: -40℃ ~ +150℃；
- Material of the valve body and material of stuffing : carbon steel, flexible graphite；
- Applicable refrigerant: R134a, R22, R407C, R404A, R507A, R410A.

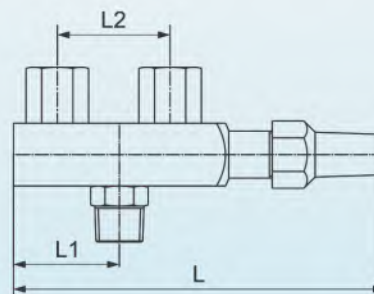


型号 Model	安全阀接口尺寸 Conn. size of safety valve	最小流通直径 Min. flow diameter (mm)	L (mm)	L1 (mm)	L2 (mm)
F-W03	3/8" NPT	φ11.0	150	46	54
F-W04	1/2"NPT	φ13.5	150	46	54
F-W06	3/4" NPT	φ19.0	180	57	65
F-W08	1"NPT	φ23.0	216	63	80

FZ安全阀用截止阀总成

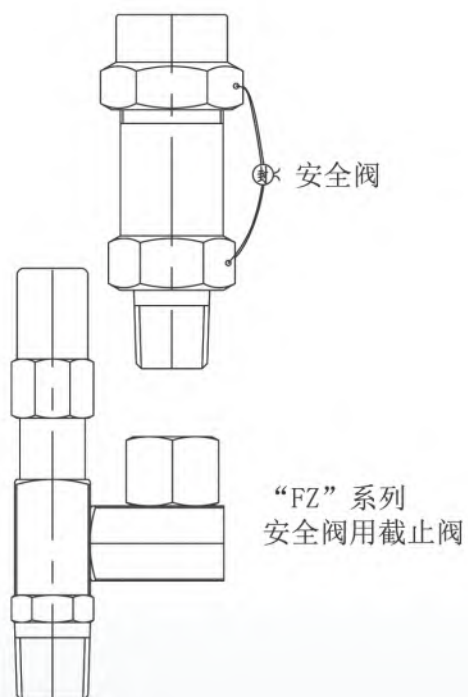

F-W安全阀用切换阀总成

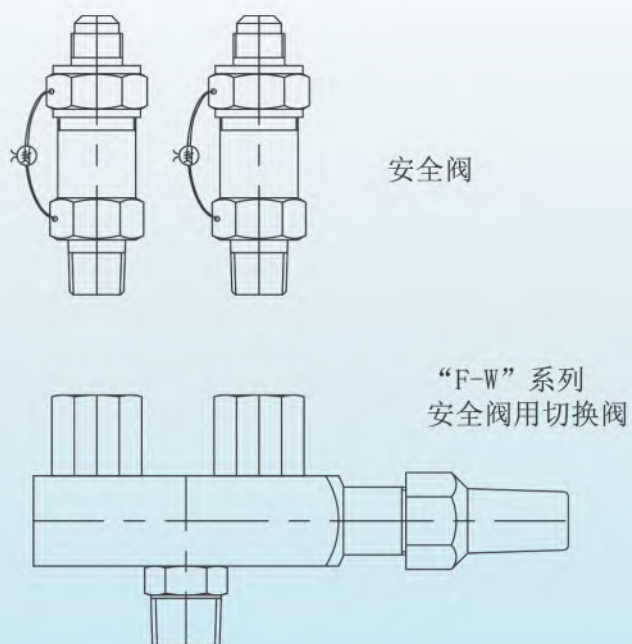


通过安装FSO视镜可以清晰的观察到油管路油的流动情况，可以安装在油分离器的回油口和螺杆式压缩机油管路上。

- 最大许可工作压力: 50bar;
- 运行温度范围: -50°C~200°C;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A;
- 适用润滑油: 矿物冷冻机油(MO)、多元醇酯合成冷冻机油(POE)、烷基苯合成冷冻机油(AB)。

You can observe the oil flow clearly in the oil line through by the oil line sight glass. It can be assembled to the oil return conneciton of oil separator, or to the oil line of Screw Compressor.

- Max.Admissible Working Pressure: 50bar;
- Running temperature range: -50°C~200°C;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- Can be used with mineral oil (MO)、full synthetic (POE)、semi-synthetic lubricant(AB).

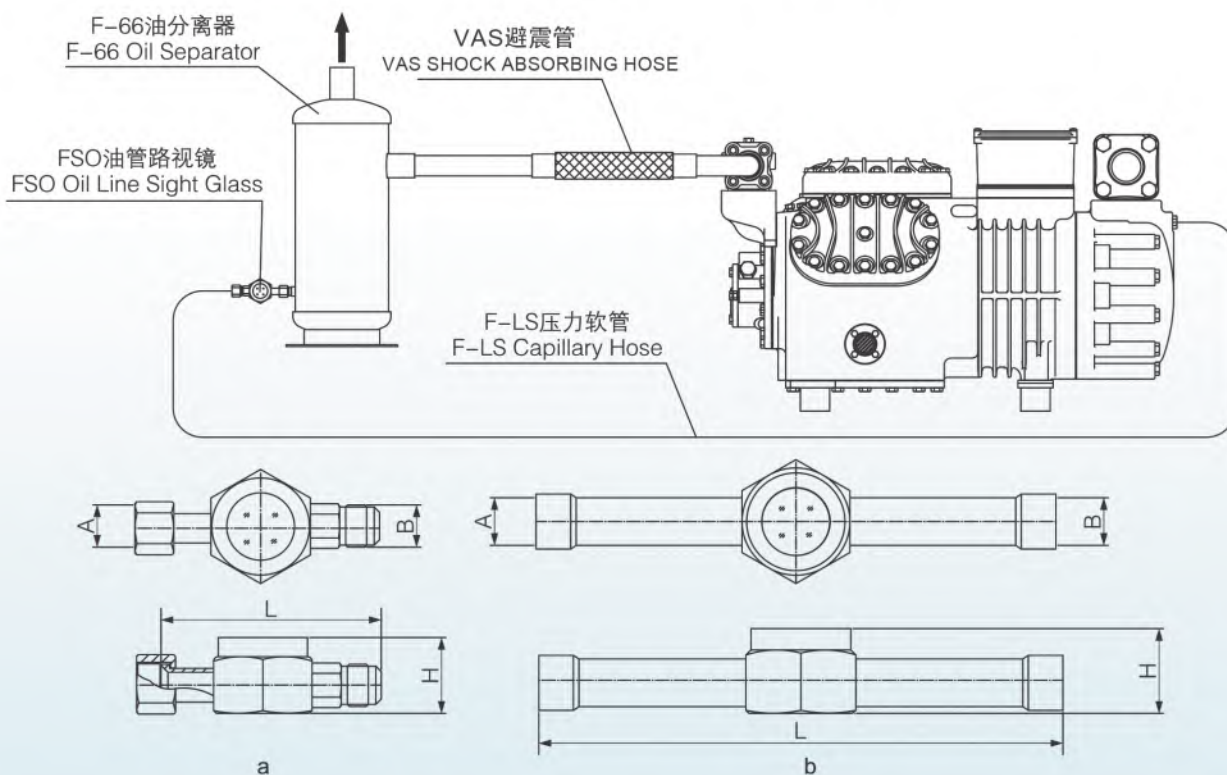

型号 Model	视孔直径 Sight hole diameter (mm)	L (mm)	H (mm)	A (接口形式) (Conn. type)	B (接口形式) (Conn. type)	图例 Fig.
FSO-02	φ19	75	20.0	1/4"SAE内螺纹	1/4"SAE外螺纹	a
FSO-03	φ21	86	24.5	3/8"SAE内螺纹	3/8"SAE外螺纹	a
FSO-04	φ21	88	24.5	1/2"SAE内螺纹	1/2"SAE外螺纹	a
FSO-03S	φ21	120	24.5	3/8"ODS	3/8"ODS	b
FSO-04S	φ21	120	24.5	1/2"ODS	1/2"ODS	b
FSO-05S	φ21	124	29.5	5/8"ODS	5/8"ODS	b
FSO-07S	φ21	160	34.5	7/8"ODS	7/8"ODS	b
FSO-09S	φ21	160	41.0	1-1/8"ODS	1-1/8"ODS	b


FSG Series Sight Glass FSG系列视液镜

视液镜被广泛地用于监测制冷剂在液体管路中的状态, 显示制冷剂中的含水量。

- 最大许可工作压力: 50bar;
- 运行温度范围: -50°C~85°C;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A。

The sight glass is used extensively for monitoring the refrigerant status in the liquid tube line, it can show you the water content in the refrigerant.

- Max. Admissible Working Pressure: 50bar;
- Running temperature range: -50°C~85°C;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A.

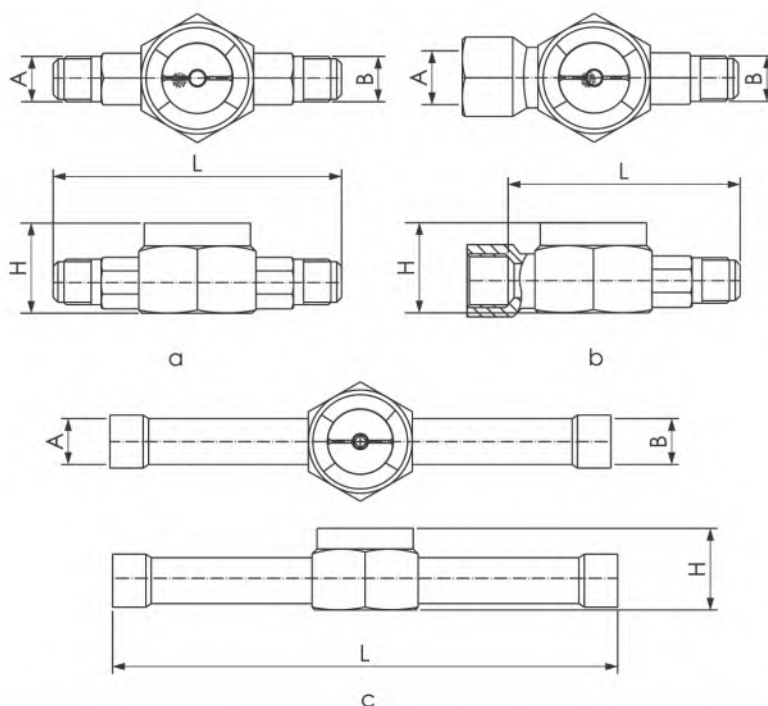


型号 Model	视孔直径 Sight hole diameter(mm)	L (mm)	H (mm)	A (接口形式) (Conn. type)	B (接口形式) (Conn. type)	图例 Fig.
FSG-03	φ21	87	24.5	3/8"SAE外螺纹 3/8"SAE Male thread	3/8"SAE外螺纹 3/8"SAE Male thread	a
FSG-04	φ21	91	29.5	1/2"SAE外螺纹 1/2"SAE Male thread	1/2"SAE外螺纹 1/2"SAE Male thread	a
FSG-05	φ21	94	32	5/8"SAE外螺纹 5/8"SAE Male thread	5/8"SAE外螺纹 5/8"SAE Male thread	a
FSG-03N	φ21	65	24.5	3/8"SAE内螺纹 3/8"SAE Female thread	3/8"SAE外螺纹 3/8"SAE Male thread	b
FSG-04N	φ21	68	24.5	1/2"SAE内螺纹 1/2"SAE Female thread	1/2"SAE外螺纹 1/2"SAE Male thread	b
FSG-05N	φ21	72	29.5	5/8"SAE内螺纹 5/8"SAE Female thread	5/8"SAE外螺纹 5/8"SAE Male thread	b
FSG-03S	φ21	120	24.5	3/8"ODS	3/8"ODS	c
FSG-04S	φ21	120	24.5	1/2"ODS	1/2"ODS	c
FSG-05S	φ21	124	29.5	5/8"ODS	5/8"ODS	c
FSG-07S	φ21	160	34.5	7/8"ODS	7/8"ODS	c
FSG-09S	φ21	160	41.0	1-1/8"ODS	1-1/8"ODS	c

通过安装FSZ视镜可以清晰的观察到容器内部的制冷剂和油, 整体碳钢设计, 聚四氟乙烯密封(PTFE), 内置一颗红色浮球。

- 最大许可工作压力: 42bar;
- 运行温度范围: -50°C~200°C;
- 安装方便、易操作, 不会拧坏玻璃或螺纹;
- 适用制冷剂: R134a、R22、R407C、R404A、R507A;
- 适用润滑油: 矿物冷冻机油(MO)、多元醇酯合成冷冻机油(POE)、烷基苯合成冷冻机油(AB)。

You can observe the oil and refrigerant inside of the vessel clearly through by the combined type sight glass. It is made by carbon steel and sealed with Polytetrafluoroethylene (PTFE), and inside of it there is a red float.


- Max. Admissible Working Pressure: 42bar;
- Running temperature range: -50°C~200°C;
- Easy installation and operation, avoid to damage the glass or thread;
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- Can be used with mineral oil (MO)、full synthetic (POE)、semi-synthetic lubricant(AB).

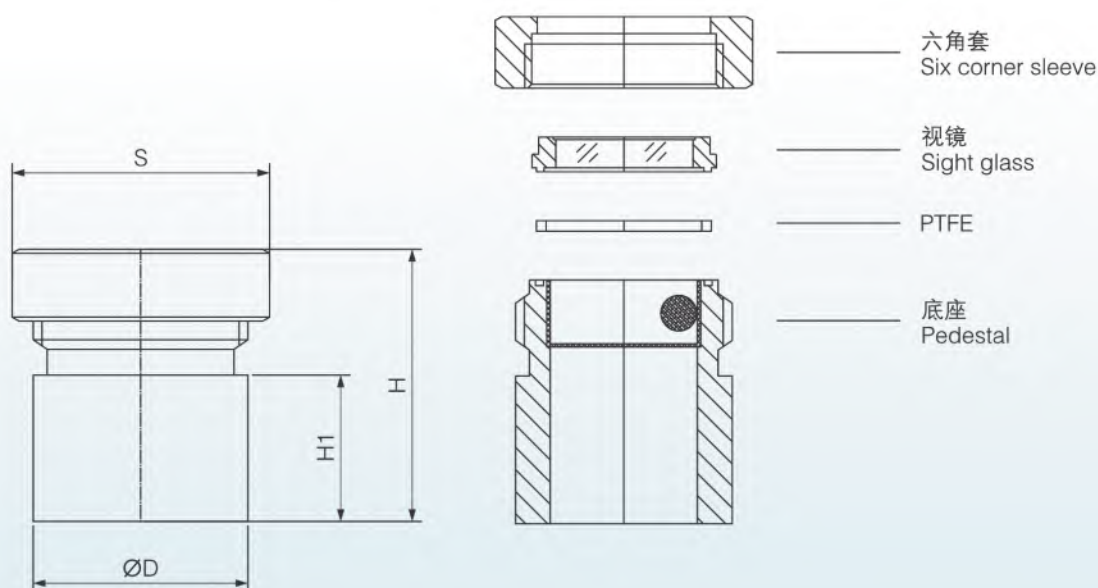

型号 Model	视孔直径 Sight hole diameter(mm)	S (mm)	φD (mm)	H (mm)	H1 (mm)
FSZ-19	19	36	32	23	51
FSZ-27	27	50	44	21	48
FSZ-36	36.3	64	57	21	52
FSZ-45	44.5	75	68	71	104


SVD Series Cut-off Valve SVD系列截止阀

- Kv值高, 压力降小;
 - 最大许可工作压力: 60 bar;
 - 运行温度范围: -50°C~150°C;
 - 适用制冷剂: R134a、R22、R407C、R404A、R507A;
 - 口径: DN15~DN200, 直角型和直通型。
- The Kv value is high and pressure droop is little;
 - Max. Admissible Working Pressure: 60 bar;
 - Running temperature: -50°C~150°C;
 - Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
 - Caliber: DN15~DN200, and with right-angled type and straight-way type.

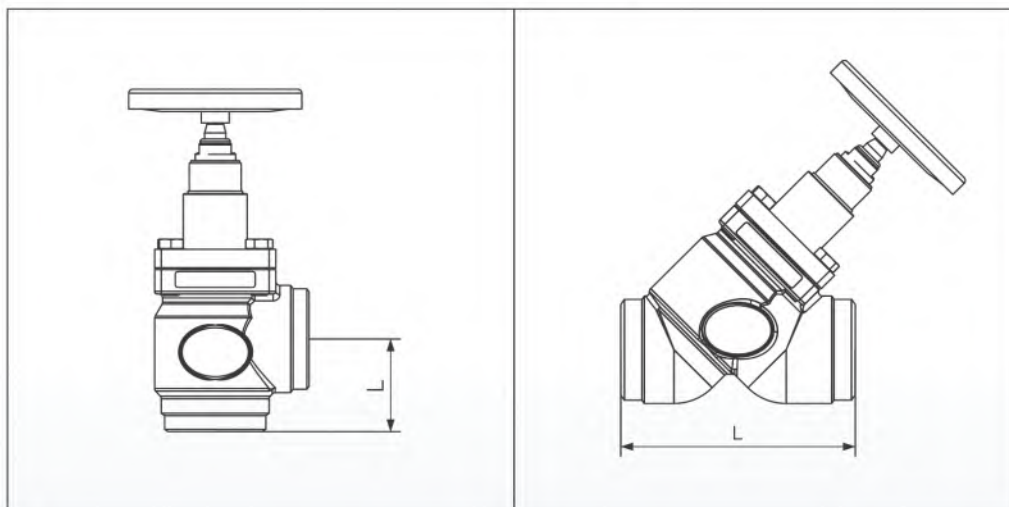

形式 Form	型号 Model	L (mm)	形式 Form	型号 Model	L (mm)
直角式截止阀 Right-angled type cut-off valve	SVD-15A	45	直通式截止阀 Straight-way type cut-off valve	SVD-15S	120
	SVD-20A	45		SVD-20S	120
	SVD-25A	45		SVD-25S	120
	SVD-32A	56		SVD-32S	156
	SVD-40A	56		SVD-40S	156
	SVD-50A	62		SVD-50S	149
	SVD-65A	70		SVD-65S	176
	SVD-80A	91		SVD-80S	216
	SVD-100A	107		SVD-100S	264
	SVD-125A	135		SVD-125S	330
	SVD-150A	146		SVD-150S	370
	SVD-200A	192		SVD-200S	460

- Kv值高, 压力降小
- 最大运行压力: 60 bar
- 运行温度范围: -50°C~150°C
- 适用制冷剂: R134a, R22, R407C, R404A, R507A
- 口径: DN15~DN125, 直角型和直通型
- The Kv value is high and pressure droop is little
- The max. running pressure: 60 bar
- Running temperature: -50°C~150°C
- Applicative refrigerants: R134a, R22, R407C, R404A, R507A
- Caliber: DN15~DN125, and with right-angled type and straight-way type

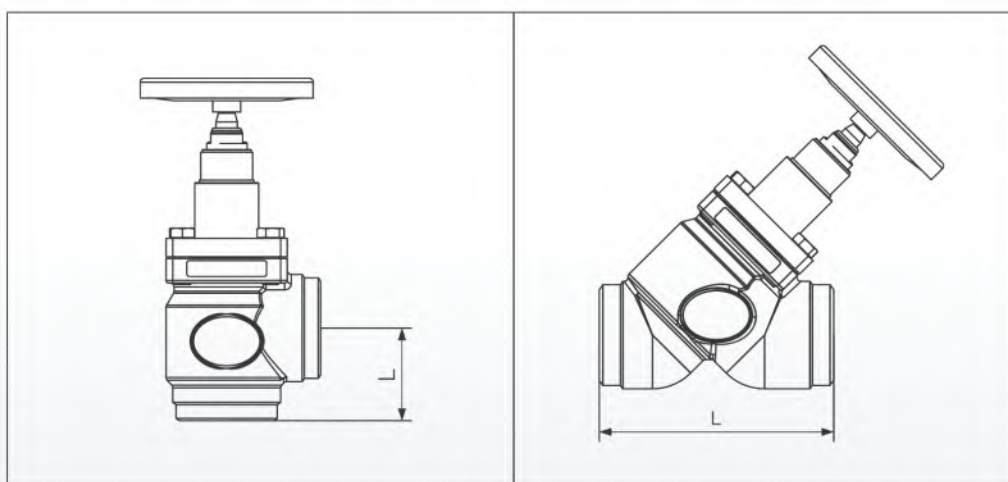

形式 Form	型号 Model	L (mm)	形式 Form	型号 Model	L (mm)
直角式 截止止回阀 Right-angled type Stop cut-off valve	SCV-15A	45	直通式 截止止回阀 Straight-way type Stop cut-off valve	SCV-15S	120
	SCV-20A	45		SCV-20S	120
	SCV-25A	45		SCV-25S	120
	SCV-32A	56		SCV-32S	156
	SCV-40A	56		SCV-40S	156
	SCV-50A	62		SCV-50S	149
	SCV-65A	70		SCV-65S	176
	SCV-80A	91		SCV-80S	216
	SCV-100A	107		SCV-100S	264
	SCV-125A	135		SCV-125S	330

性能:

- 高伸缩性
- 不再需要铜管焊接、扩口和弯曲
- 节约系统装配时间
- 极低的制冷剂渗透率

Advantages

- High flexibility
- No more brazing, flaring and bending of copper tubes
- Time saving for system construction and assembling
- Very low refrigerating gas permeation rate.

我们的生产品种 Our Product Line




毛细热塑软管 Capillary Thermoplastic Hose

应用范围的样例 Some examples of application fields

连接压力表, 压力控制装置和回油管

Connection with pressure gauge, control units and pipe of oil return.

软管装配整体长度(mm) Hose Assembly Overall Length mm.

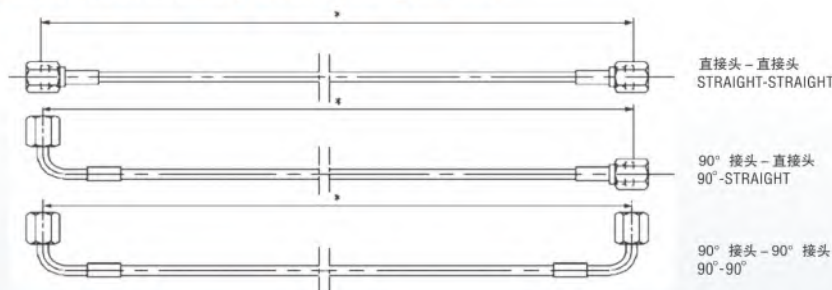

内径为2mm热塑软管手动安装说明

工作温度: -40°C~+130°C, 工作压力: 45bar

Instructions for manual assembling of capillary hose ID 2mm

Working temperature -40°C~+ 130°C-Working pressure 45 bar



如何使用手钳?

装配软管时, 先检查扣压成形的套管的平均直径为7.1mm(1/4直径最大允许7.3mm)。如果不是, 请按上述尺寸调整凸轮轴至套管成形尺寸合格为止。

How to regulate hand pliers

Assemble one hose and check that the average diameter of the crimped sleeve is 7,1mm (just one of the four diameters can be maximum 7,3mm). If not, regulate the cam till the obtained crimped sleeve is perfect on the basis of the above mentioned measures.



使用自动或手动的切割器来断管, 切割必须完全平直和平滑;

Cut the hose using proper shears, automatic or manual cutters. The cut must be perfectly square and smooth.



将套管穿在软管上, 并使套管上的凹槽朝向软管连接处。

Insert the sleeve on the hose with the groove towards the hose side to be assembled.



将螺母穿在软管上
Insert the nut onto the hose.



将接头插入软管内;
Push the insert inside the hose.



将螺母滑至接头外表面, 同时将套管推至并覆盖插头底部。

Make the nut slide onto the external part of the insert (flare) and push the sleeve till it covers the bottom of the free insert.



使用固定手钳扣压软管时, 应使套管覆盖软管的整个表面。将套管成形直到手钳自动打开, 第二次扣压是为了确保安全无渗漏。

Assemble the hose by positioning manual pliers on the sleeve covering its whole surface. Crimp till hand pliers open automatically. A second crimping is useful to obtain a safer assembling.

内径2mm毛细热塑管 Capillary Thermoplastic Hose ID 2 mm



部件编号 Hose Part Number	颜色 Colour	内径 Inner Diameter	外径 Outer Diameter	公差 Tolerances	最小弯曲半径 Min Bending Radius	工作压力 Working Pressure	工作压力 Working Pressure	重量 Weight
41000100	Black	2.0 mm	5.9 mm	0.1 mm	10 mm	45 bar	653 psi	30 g/m
41000100-B	Blue	2.0	5.9	0.1	10	45	653	30
41000100-R	Red	2.0	5.9	0.1	10	45	653	30

☆上述所有尺寸的软管可根据长度需要自行裁剪
工作温度: -40°C~+130°C, 工作压力: 45bar
All the above sizes are available pre assembled with crimped fittings on required lengths -Working temp. -40°C~+130°C Working pressure 45 bar



内径为2mm毛细热塑软管零件和附件 Fittings and Accessories for Capillary Hose ID 2 mm



A内径为2mm的热塑软管是连接压力控制装置的最佳选择。
(压力和温度测量仪器)
The thermoplastic hoses ID 2 mm are the ideal solution for the connection with pressure control units (pressure and temperature gauges).

套管
Sleeve



编码/Code 41100107

直接头
Insert



编码/Code 41100101

带销子直接头
Insert with depressor



编码/Code 41100102

销子
Depressor



编码/Code 41400100

螺母
Nut



编码/Code 41100201

90°弯接头
Insert 90°



编码/Code 41100202

三通接头
Tee nipple



编码/Code 41100104

中间带螺母三通接头
Tee female nipple



编码/Code 41100203

侧面带螺母三通接头
180° Tee female nipple



编码/Code 41100204

1/4"铜垫片
1/4"Copper gasket



编码/Code 41400101

封管钳
Hand crimper



编码/Code 41500100

断管钳
Snips



编码/Code 41500101

内径4mm毛细热塑软管 Capillary Thermoplastic Hose ID 4 mm



部件编号 Hose Part Number	颜色 Colour	内径 Inner Diameter	外径 Outer Diameter	公差 Tolerances	最小弯曲半径 Min Bending Radius	工作压力 Working Pressure	工作压力 Working Pressure	重量 Weight
41000101	Black	4.0 mm	8.2 mm	0.1 mm	35 mm	45 bar	653 PSI	50 g/m
41000101-B	Blue	4.0	8.2	0.1	35	45	653	50
41000101-R	Red	4.0	8.2	0.1	35	45	653	50

☆ 上述所有尺寸的软管可根据长度需要自行裁剪 工作温度: -40°C~+130°C, 工作压力: 45bar

All the above sizes are available pre assembled with crimped fittings on required lengths - Working temp. -40°C~+130°C Working pressure 45 bar



A内径为4mm的毛细热塑软管是连接压力控制装置和回油装置的最佳选择。

The capillary thermoplastic hoses ID 4 mm are the ideal solution for:
- the connection with pressure control units (pressure gauges)
- oil return.

内径为4mm毛细管的扣压零件及配件 Crimp Fittings and Accessories for Capillary Hose ID 4 mm

内径为软管的1/4SAE配件 1/4" SAE fittings for 1/4" hose ID 4 mm

套管
Sleeve



编码/Code 41200106

直接头
Insert



编码/Code 41200100

螺母
Nut



编码/Code 41100201

90°弯接头
Insert 90°



编码/Code 41200201

三通接头
Tee nipple



编码/Code 41200102

中间带螺母三通接头
Tee female nipple



编码/Code 41200202

侧面带螺母三通接头
180° Tee female nipple



编码/Code 41200203

销子
Depressor



编码/Code 41400100

1/4"铜垫片
1/4" Copper gasket



编码/Code 41400101

便于和铜垫圈组装的特殊直插头
Special insert for an easy assembly of copper washers



编码/Code 41200105

封管钳
Hand crimper



编码/Code 41500102

断管钳
Snips



编码/Code 41500101

配内径为4mm软管的3/8"SAE零件 3/8" SAE fittings for 1/4" hose ID 4mm

直接头
Insert



编码/Code 41300100

螺母
Nut



编码/Code 41300102

90°弯接头
Insert 90°



编码/Code 41300101

3/8"铜垫片
3/8" Copper gasket



编码/Code 41400102







软管部件号 Hose Part Number	内径 Inner Diameter	外径 Outer Diameter	公差 Tolerances	最小弯曲半径 Min Bending Radius	工作压力 Working Pressure	工作压力 Working Pressure	重量 Weight
42000060	4.4 mm	9.7 mm	0.1 mm	50 mm	45 bar	580 psi	80 g/m
42000080	6.5	11.9	0.10	55	45	580	100
42000100	8.5	13.9	0.15	60	45	580	120
42000130	10.5	16.0	0.15	80	45	580	140
42000160	13.5	19.3	0.15	150	45	580	180
42000190	17.5	23.6	0.20	200	45	580	240

上述所有尺寸的软管可根据长度需要自行裁剪工作温度: -40°C~+130°C, 工作压力: 45bar


All the above sizes are available pre assembled with crimped fittings on required lengths-Working temp. -40°C~+130°C, Working pressure 45 bar.

F-LS系列压力软管的扣压零件及配件


Fittings and Accessories for Capillary Hose F-LS

 42000060软管 Hose 1/4"SAE直接头(7/16"-20UNF) Insert 1/4"SAE 90°弯接头(7/16"-20UNF) Insert 90°	 42000080软管 Hose 3/8"SAE直接头(5/8"-18UNF) Insert 3/8"SAE 90°弯接头(5/8"-18UNF) Insert 90°	 42000100软管 Hose 3/8"SAE 直接头(5/8"-18UNF) Insert 3/8"SAE 90°弯接头(5/8"-18UNF) Insert 90°
 42000130软管 Hose 1/2"SAE直接头(3/4"-16UNF) Insert 1/2"SAE 90°弯接头(3/4"-16UNF) Insert 90°	 42000160软管 Hose 5/8"SAE 直接头(7/8"-14UNF) Insert 5/8"SAE 90°弯接头(7/8"-14UNF) Insert 90°	 42000190软管 Hose 7/8"SAE直接头(1-1/16"-14UNF) Insert 7/8"SAE 90°弯接头(1-1/16"-14UNF) Insert 90°


Hot fluorine defrosting system for coil evaporator diagram 排管蒸发器热氟融霜系统图

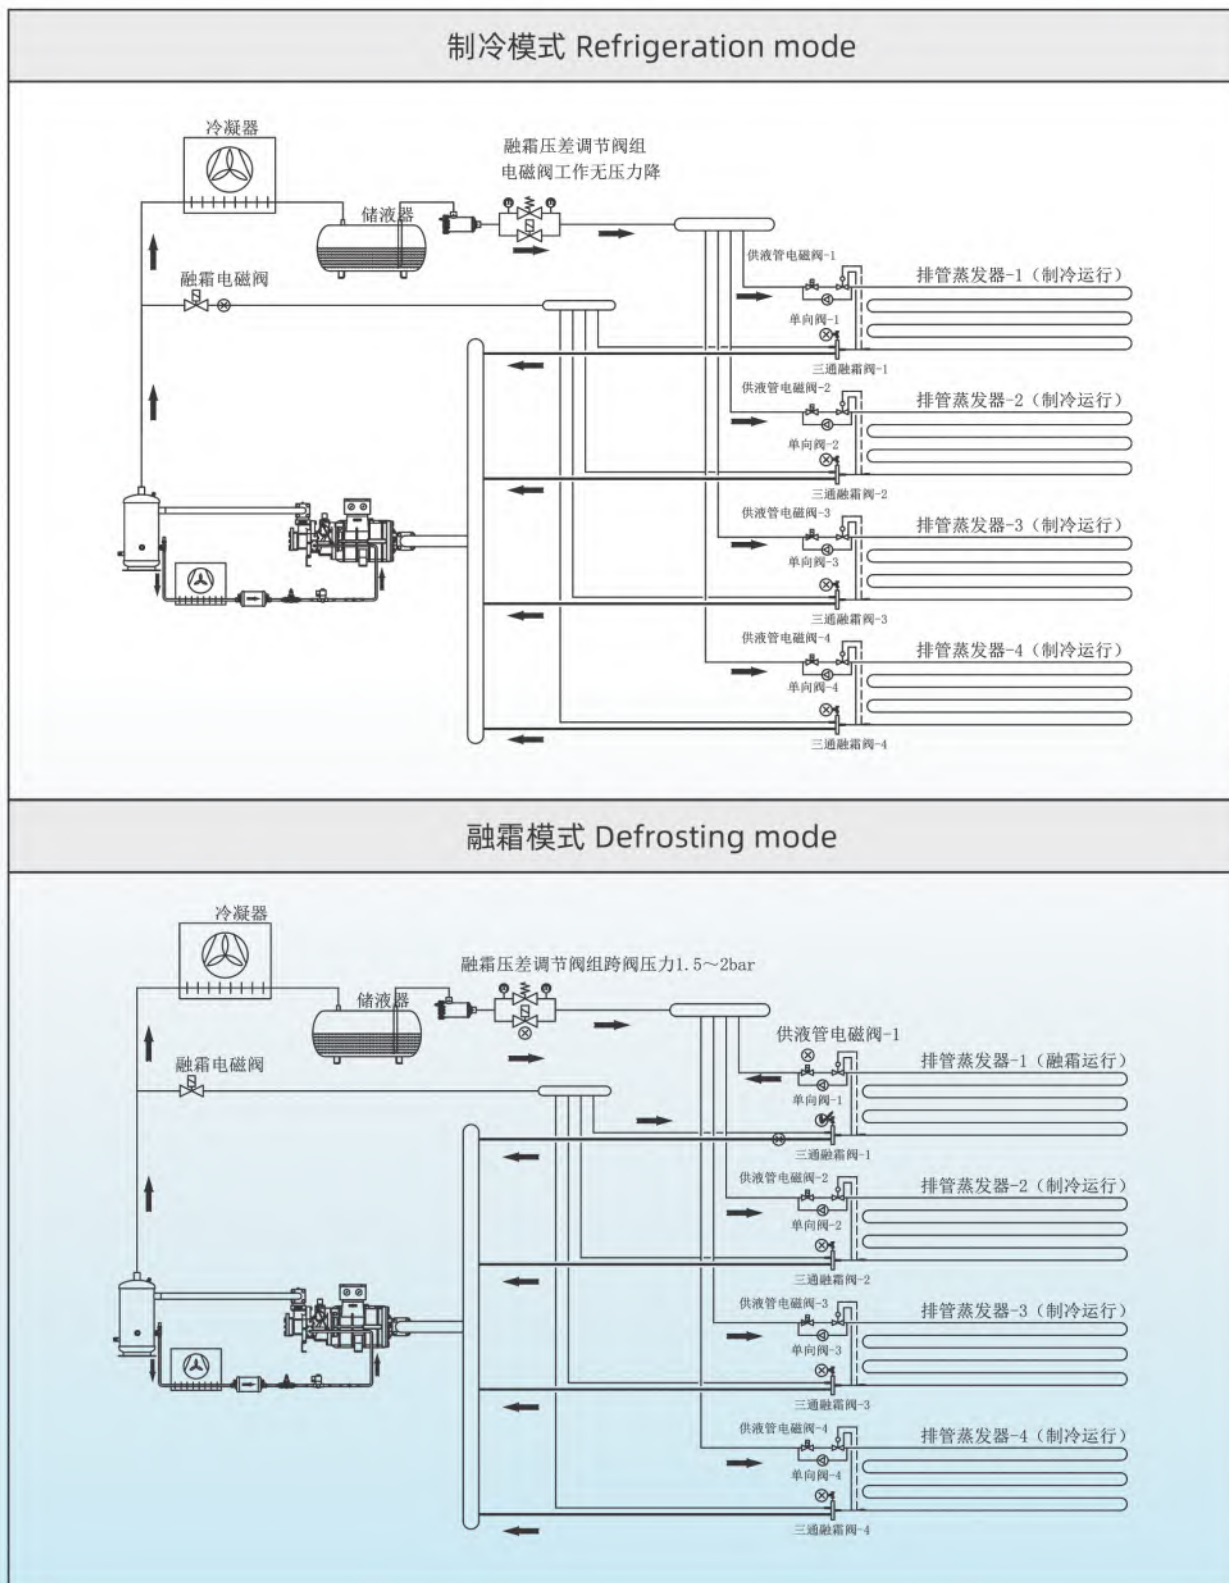

制冷模式 Refrigeration mode

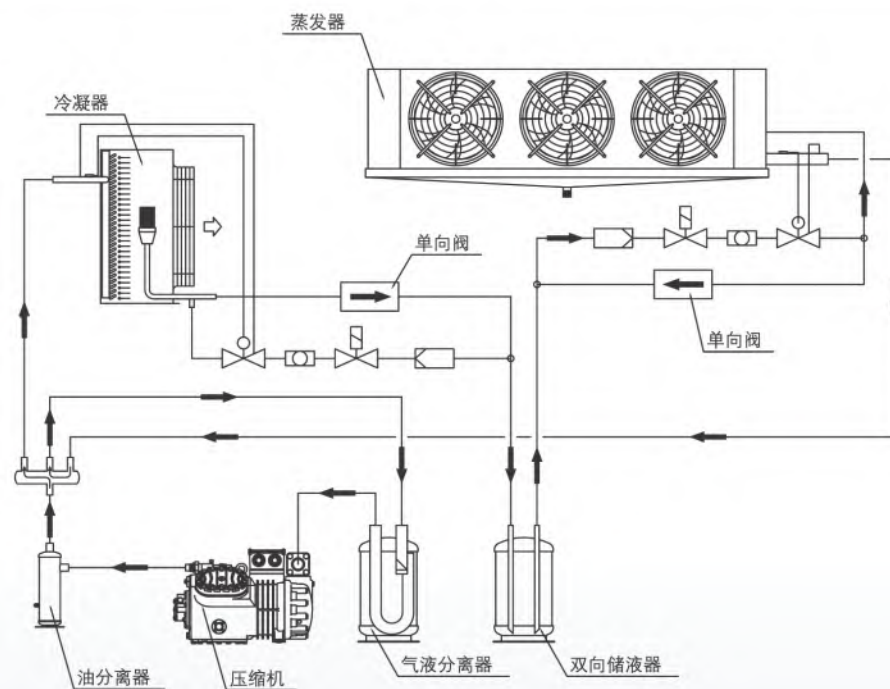


融霜模式 Defrosting mode

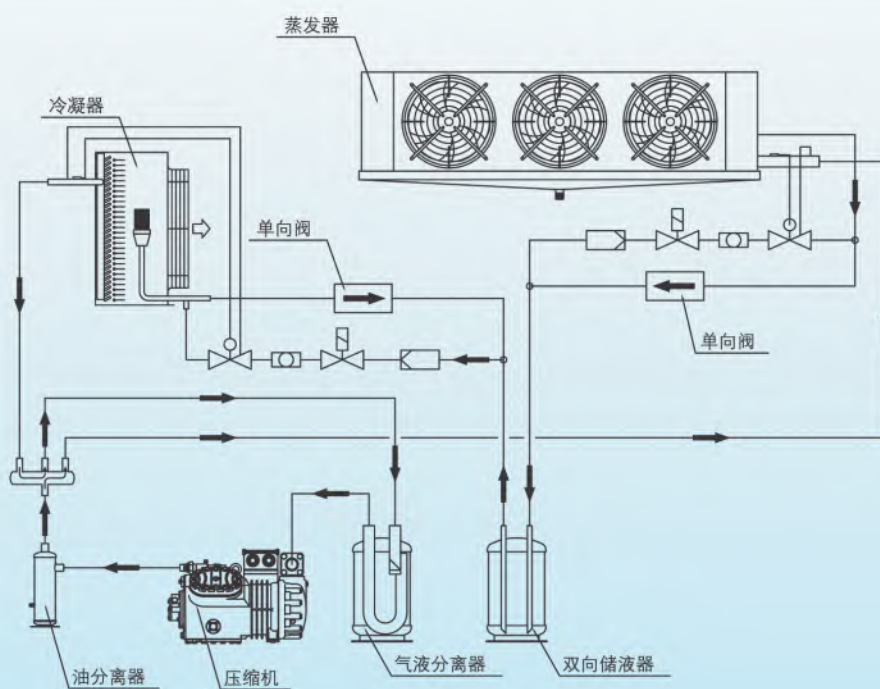


储油式油分离器压缩机组

- 1、氟利昂满液式蒸发系统；
- 2、片冰机、管冰机、块冰机；
- 3、蒸发温度低于 -25°C 的制冷系统；
- 4、制冷管道较长的制冷系统；
- 5、蒸发器管容积较大的制冷系统；
- 6、回油难度较大的制冷系统等.....

建议采用储油式油分离器,同时加装电子油位控制器,以扩展制冷机组的油容积,减少特殊情况下的压缩机缺油几率。





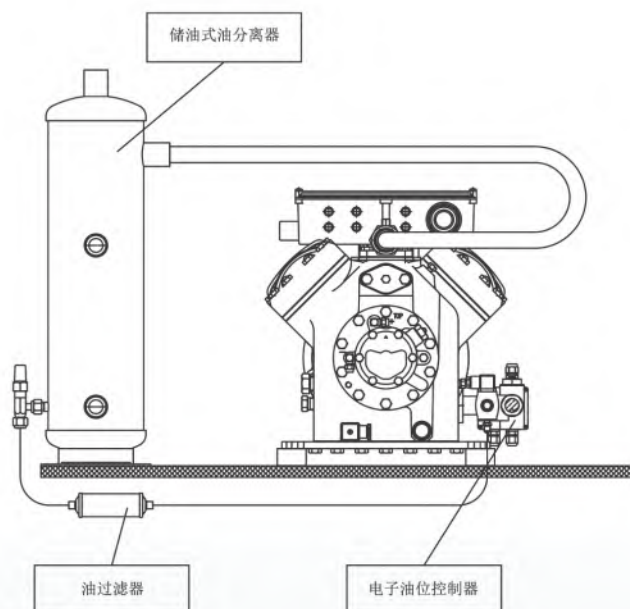


冷凝器高位安装管道布置

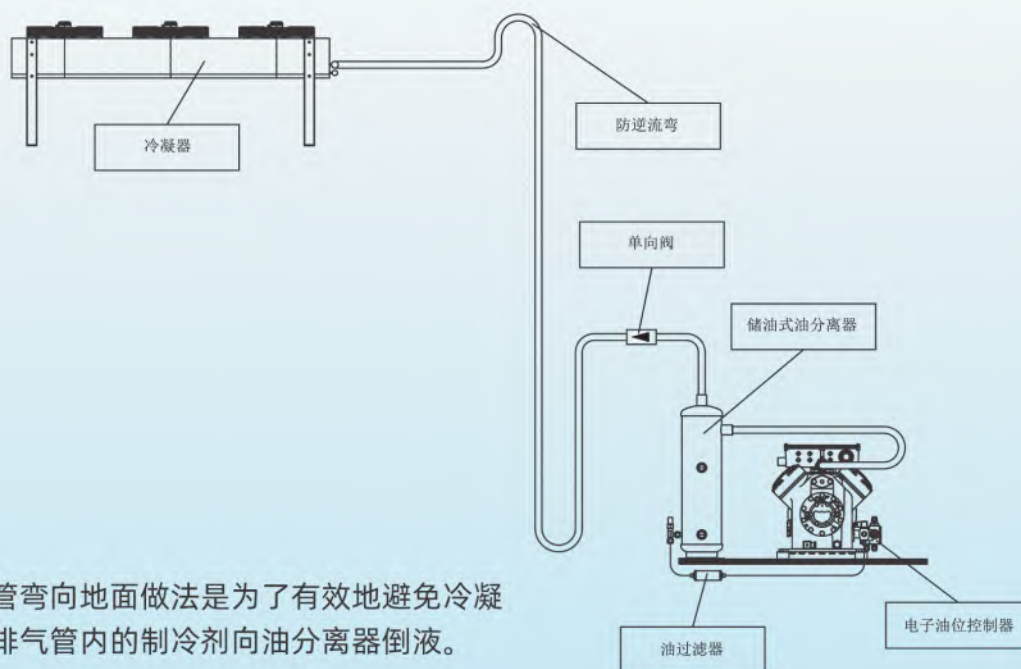


排气管弯向地面做法是为了有效地避免冷凝器及排气管内的制冷剂向油分离器倒液。

制冷剂通过截止阀和管件时形成摩擦阻力用相同管径直管段表示的长度

紫铜管外径	1/2"	5/8"	7/8"	1-1/8"	1-3/8"	1-5/8"	2-1/8"	2-5/8"	3-1/8"
黄铜直通截止阀	0.36m	0.41m	0.56m	0.71m	0.91m	1.01m	1.45m	1.75m	2.11m
黄铜直角截止阀	0.18m	0.23m	0.31m	0.38m	0.46m	0.53m	0.71m	0.86m	1.07m
90°转弯通过三通	0.08m	0.10m	0.13m	0.15m	0.20m	0.23m	0.31m	0.36m	0.43m
T型三通 (直穿) 或向下	0.02m	0.03m	0.04m	0.05m	0.06m	0.08m	0.09m	0.10m	0.13m
90°弯头或异径三通 (直穿)	0.03m	0.05m	0.05m	0.08m	0.10m	0.10m	0.13m	0.18m	0.20m
    									
90°转弯通过三通		T型三通 (直穿)	T型三通向下	90°弯头	异径三通直穿				

备注: 所列摩擦阻力形成的相同管径直管段表示的长度, 阀门系处于全开位置时的数据。

制冷剂通过截止阀和管件时形成摩擦阻力用相同管径直管段表示的长度

无缝钢管公称直径		45°斜柄阀	角阀	升降式止回阀		90°长半径弯头	180°长半径弯头
mm	in						
15	1/2"	2.13	2.13	2.13	2.13	0.31	0.76
20	3/4"	2.74	2.74	2.74	2.74	0.43	0.98
25	1"	3.66	3.66	3.66	3.66	0.52	1.25
32	1 1/4"	4.57	4.57	4.57	4.57	0.70	1.71
40	1 1/2"	5.49	5.49	5.49	5.49	0.79	1.92
50	2"	7.32	7.32	7.32	7.32	1.01	2.50
65	2 1/2"	8.84	8.84	8.84	8.84	1.25	3.05
75	3"	10.67	10.67	10.67	10.67	1.52	3.66
90	3 1/2"	12.50	12.50	12.50	12.50	1.80	4.57
100	4"	14.33	14.33	14.33	14.33	2.04	5.18
125	5"	17.68	17.68	17.68	17.68	2.50	6.40
150	6"	21.34	21.34	21.34	21.34	3.05	7.62
200	8"	25.91	25.91	25.91	25.91	3.96	10.06
250	10"	32.00	32.00	32.00	32.00	4.88	12.80
300	12"	39.62	39.62	39.62	39.62	5.79	

备注：所列摩擦阻力形成的相同管径直管段表示的长度，阀门系处于全开位置时的数据。

垂直上升制冷剂液管压力损失和需要的最小过冷度

上升(m)	3.05		4.57		6.10		7.62		9.14		12.2		15.2		22.9		30.5	
	bar	°C	bar	°C	bar	°C	bar	°C	bar	°C	bar	°C	bar	°C	bar	°C	bar	°C
R22	0.33	0.60	0.50	1.29	0.67	1.73	0.83	2.12	1.00	2.62	1.34	3.45	1.67	4.45	2.50	6.73	3.34	9.18
R404A/R507A	0.28	0.62	0.42	0.90	0.57	1.18	0.70	1.51	0.84	1.84	1.12	2.29	1.41	3.12	2.11	4.62	2.81	6.57

备注:

- 1、以上数据基于上升管底部液体温度43.3°C
- 2、垂直上升液管的压力损失意味着消耗额外的过冷度, 过冷度消耗到“0”时制冷剂进入饱和状态, 可能出现闪发气体;
- 3、闪发气体将影响膨胀阀正常工作, 同时导致系统制冷量降低。

制冷量-库温-管径对照表
(R22)

	管径				
库温	-25℃	-18℃	0℃	5℃	10℃
制冷量/KW	供液管&回气管	供液管&回气管	供液管&回气管	供液管&回气管	供液管&回气管
1	3/8" & 5/8"	3/8" & 1/2"	3/8" & 3/8"	3/8" & 3/8"	3/8" & 3/8"
2	3/8" & 7/8"	3/8" & 5/8"	3/8" & 1/2"	3/8" & 1/2"	3/8" & 3/8"
3	3/8" & 7/8"	3/8" & 7/8"	3/8" & 5/8"	3/8" & 5/8"	3/8" & 1/2"
4	3/8" & 1-1/8"	3/8" & 7/8"	3/8" & 5/8"	3/8" & 5/8"	3/8" & 5/8"
5	3/8" & 1-1/8"	3/8" & 1-1/8"	3/8" & 7/8"	3/8" & 7/8"	3/8" & 5/8"
6	3/8" & 1-3/8"	3/8" & 1-1/8"	3/8" & 7/8"	3/8" & 7/8"	3/8" & 7/8"
7	3/8" & 1-3/8"	3/8" & 1-3/8"	3/8" & 7/8"	3/8" & 7/8"	3/8" & 7/8"
8	1/2" & 1-3/8"	1/2" & 1-3/8"	1/2" & 1-1/8"	1/2" & 7/8"	1/2" & 7/8"
9	1/2" & 1-5/8"	1/2" & 1-3/8"	1/2" & 1-1/8"	1/2" & 7/8"	1/2" & 7/8"
10	5/8" & 1-5/8"	1/2" & 1-3/8"	1/2" & 1-1/8"	1/2" & 1-1/8"	1/2" & 7/8"
12	5/8" & 2-1/8"	5/8" & 1-5/8"	5/8" & 1-1/8"	5/8" & 1-1/8"	5/8" & 1-1/8"
15	5/8" & 2-1/8"	5/8" & 1-5/8"	5/8" & 1-3/8"	5/8" & 1-3/8"	5/8" & 1-1/8"
18	5/8" & 2-1/8"	5/8" & 2-1/8"	5/8" & 1-3/8"	5/8" & 1-3/8"	5/8" & 1-3/8"
20	7/8" & DN65	7/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-3/8"	5/8" & 1-3/8"
22	7/8" & DN65	7/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-3/8"	7/8" & 1-3/8"
25	7/8" & DN65	7/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-5/8"	7/8" & 1-3/8"
28	7/8" & DN65	7/8" & DN65	7/8" & 1-5/8"	7/8" & 1-5/8"	7/8" & 1-5/8"
30	7/8" & DN65	7/8" & DN65	7/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-5/8"
32	7/8" & DN80	7/8" & DN65	7/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-5/8"
35	1-1/8" & DN80	1-1/8" & DN65	7/8" & 2-1/8"	7/8" & 2-1/8"	7/8" & 1-5/8"
38	1-1/8" & DN80	1-1/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 2-1/8"	1-1/8" & 1-5/8"
40	1-1/8" & DN80	1-1/8" & DN80	1-1/8" & 2-1/8"	1-1/8" & 2-1/8"	1-1/8" & 2-1/8"
50	1-1/8" & DN100	1-1/8" & DN80	1-1/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 2-1/8"
60	1-3/8" & DN100	1-3/8" & DN100	1-3/8" & DN65	1-3/8" & DN65	1-3/8" & 2-1/8"
70	1-3/8" & DN100	1-3/8" & DN100	1-3/8" & DN65	1-3/8" & DN65	1-3/8" & DN65
80	1-3/8" & DN125	1-3/8" & DN100	1-3/8" & DN80	1-3/8" & DN65	1-3/8" & DN65
90	1-5/8" & DN125	1-5/8" & DN100	1-3/8" & DN80	1-3/8" & DN80	1-3/8" & DN65
100	1-5/8" & DN125	1-5/8" & DN125	1-5/8" & DN80	1-5/8" & DN80	1-5/8" & DN65
110	1-5/8" & DN125	1-5/8" & DN125	1-5/8" & DN100	1-5/8" & DN80	1-5/8" & DN80
120	1-5/8" & DN150	1-5/8" & DN125	1-5/8" & DN100	1-5/8" & DN100	1-5/8" & DN80
130	DN65 & DN150	DN65 & DN125	1-5/8" & DN100	1-5/8" & DN100	1-5/8" & DN80
140	DN65 & DN150	DN65 & DN125	DN65 & DN100	DN65 & DN100	DN65 & DN100
150	DN65 & DN150	DN65 & DN125	DN65 & DN100	DN65 & DN100	DN65 & DN100











备注: 液管需要校核过冷度以防止闪发, 上升立管要校核流速以保证回油。

制冷量-库温-管径对照表 (R404A/R507A)







库温	管径				
	-25℃	-18℃	0℃	5℃	10℃
制冷量/KW	供液管&回气管	供液管&回气管	供液管&回气管	供液管&回气管	供液管&回气管
1	3/8" & 5/8"	3/8" & 1/2"	3/8" & 3/8"	3/8" & 3/8"	3/8" & 3/8"
2	3/8" & 7/8"	3/8" & 5/8"	3/8" & 1/2"	3/8" & 1/2"	3/8" & 3/8"
3	3/8" & 1-1/8"	3/8" & 7/8"	3/8" & 5/8"	3/8" & 5/8"	3/8" & 1/2"
4	1/2" & 1-1/8"	1/2" & 1-1/8"	3/8" & 5/8"	3/8" & 5/8"	3/8" & 5/8"
5	1/2" & 1-2/8"	1/2" & 1-1/8"	1/2" & 7/8"	1/2" & 7/8"	1/2" & 5/8"
6	5/8" & 1-3/8"	5/8" & 1-1/8"	1/2" & 7/8"	1/2" & 7/8"	1/2" & 7/8"
7	5/8" & 1-3/8"	5/8" & 1-3/8"	5/8" & 7/8"	5/8" & 7/8"	5/8" & 7/8"
8	5/8" & 1-5/8"	5/8" & 1-3/8"	5/8" & 1-1/8"	5/8" & 7/8"	5/8" & 7/8"
9	7/8" & 1-5/8"	5/8" & 1-3/8"	5/8" & 1-1/8"	5/8" & 1-1/8"	5/8" & 7/8"
10	7/8" & 1-5/8"	5/8" & 1-5/8"	5/8" & 1-1/8"	5/8" & 1-1/8"	5/8" & 7/8"
12	7/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-1/8"	7/8" & 1-1/8"	5/8" & 1-1/8"
15	7/8" & 2-1/8"	7/8" & 2-1/8"	7/8" & 1-3/8"	7/8" & 1-3/8"	7/8" & 1-1/8"
18	7/8" & DN65	7/8" & 2-1/8"	7/8" & 1-3/8"	7/8" & 1-3/8"	7/8" & 1-3/8"
20	1-1/8" & DN65	1-1/8" & 2-1/8"	7/8" & 1-5/8"	7/8" & 1-3/8"	7/8" & 1-3/8"
22	1-1/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 1-5/8"	7/8" & 1-3/8"	7/8" & 1-3/8"
25	1-1/8" & DN65	1-1/8" & DN65	1-1/8" & 1-5/8"	7/8" & 1-5/8"	7/8" & 1-3/8"
28	1-1/8" & DN80	1-1/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 1-5/8"	1-1/8" & 1-5/8"
30	1-1/8" & DN80	1-1/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 1-5/8"	1-1/8" & 1-5/8"
32	1-3/8" & DN80	1-3/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 1-5/8"	1-1/8" & 1-5/8"
35	1-3/8" & DN80	1-3/8" & DN65	1-1/8" & 2-1/8"	1-1/8" & 2-1/8"	1-1/8" & 1-5/8"
38	1-3/8" & DN100	1-3/8" & DN80	1-3/8" & 2-1/8"	1-3/8" & 2-1/8"	1-3/8" & 1-5/8"
40	1-3/8" & DN100	1-3/8" & DN80	1-3/8" & 2-1/8"	1-3/8" & 2-1/8"	1-3/8" & 2-1/8"
50	1-5/8" & DN100	1-5/8" & DN100	1-3/8" & DN65	1-3/8" & 2-1/8"	1-3/8" & 2-1/8"
60	1-5/8" & DN100	1-5/8" & DN100	1-5/8" & DN65	1-5/8" & DN65	1-5/8" & 2-1/8"
70	2-1/8" & DN125	1-5/8" & DN100	1-5/8" & DN65	1-5/8" & DN65	1-5/8" & DN65
80	2-1/8" & DN125	2-1/8" & DN100	2-1/8" & DN80	1-5/8" & DN65	1-5/8" & DN65
90	2-1/8" & DN125	2-1/8" & DN125	2-1/8" & DN80	2-1/8" & DN80	2-1/8" & DN65
100	2-1/8" & DN125	2-1/8" & DN125	2-1/8" & DN100	2-1/8" & DN80	2-1/8" & DN80
110	2-1/8" & DN150	2-1/8" & DN125	2-1/8" & DN100	2-1/8" & DN80	2-1/8" & DN80
120	DN65 & DN150	DN65 & DN125	2-1/8" & DN100	2-1/8" & DN100	2-1/8" & DN80
130	DN65 & DN150	DN65 & DN125	2-1/8" & DN100	2-1/8" & DN100	2-1/8" & DN80

备注: 液管需要校核过冷度以防止闪发, 上升立管要校核流速以保证回油。

- 材料: 20#碳钢;
- 表面处理: 镀镍;
- Material: 20# carbon steel;
- Surface treatment: Nickel plating.

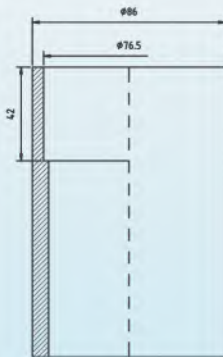 3/8"铜管ODS钎焊 3/8" copper tube ODS braze welding	 1/2"铜管ODS钎焊 1/2" copper tube ODS braze welding	 5/8"铜管ODS钎焊 5/8" copper tube ODS braze welding	
 3/4"铜管ODS钎焊 3/4" copper tube ODS braze welding	 7/8"铜管ODS钎焊 7/8" copper tube ODS braze welding	 1-1/8"铜管ODS钎焊 1-1/8" copper tube ODS braze welding	 1-3/8"铜管ODS钎焊 1-3/8" copper tube ODS braze welding
 1-5/8"铜管ODS钎焊 1-5/8" copper tube ODS braze welding	 2-1/8"铜管ODS钎焊 2-1/8" copper tube ODS braze welding	 2-5/8"铜管ODS钎焊 2-5/8" copper tube ODS braze welding	 3"铜管ODS钎焊 3" copper tube ODS braze welding

- 材料: 20#碳钢;
- 表面处理: 镀镍;
- Material: 20# carbon steel;
- Surface treatment: Nickel plating.




欧达法斯克(O&F)氟制冷压力容器专用法兰。


- 材料: 20#碳钢;
- 标准配置: 密封垫、整套螺栓。

O&F appropriate flange for fluorine refrigeration pressure vessel.


- Material: 20# carbon steel;
- Standard fitting: Hermetic gasket and whole bolt.




1-1/8"铜管ODS钎焊
1-1/8" copper tube ODS welding
φ32(DN25)无缝钢管BW对焊
φ32(DN25) seamless steel BW




1-3/8"铜管ODS钎焊
1-3/8" copper tube ODS welding
φ38(DN32)无缝钢管BW对焊
φ38(DN32) seamless steel BW




1-5/8"铜管ODS钎焊
1-5/8" copper tube ODS welding
φ45(DN40)无缝钢管BW对焊
φ45(DN40) seamless steel BW




2-1/8"铜管ODS钎焊
2-1/8" copper tube ODS welding
φ57(DN50)无缝钢管BW对焊
φ57(DN50) seamless steel BW




φ76(DN65)无缝钢管BW对焊
φ76(DN65) seamless steel BW




φ89(DN80)无缝钢管BW对焊
φ89(DN80) seamless steel BW



φ108(DN100)无缝钢管BW对焊
φ108(DN100) seamless steel BW



φ133(DN125)无缝钢管BW对焊
φ133(DN125) seamless steel BW

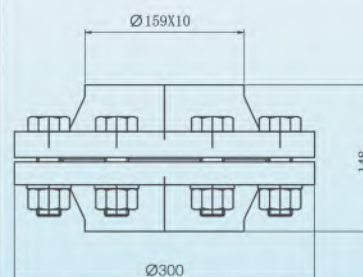

φ159(DN150)无缝钢管BW对焊
φ159(DN150) seamless steel BW



天津市欧达法斯克制冷设备有限公司

Tianjin OUDAFASIKE Refrigeration Equipment Co., Ltd

ADD: 中国·天津市津南区双港镇慧科路8号

P.S.: 300350

NO.8 Huike Road, Shuanggang Industrial Zone, Jinnan District, Tianjin, China

TEL: +86-22-28571146

Http: www.oudafasike.com

FAX: +86-22-28571149

E-mail: oudafasike@oudafasike.com

尊敬的客户:

为了快捷的为您提供设备配套产品的选型建议, 请您逐条填写或选择下列表格中的项目。


客户名称:						
联系人:						
联系方式:				日期:		
序号	项目	数值				
1	压缩机品牌					
2	压缩机型号					
3	压缩机类型	涡旋机	活塞机	螺杆机		
4	压缩机台数 (并联机组)					
5	蒸发温度 (℃)					
6	冷凝温度 (℃)					
7	供液和蒸发形式	膨胀阀供液/干式蒸发		泵供液/满液式蒸发		
8	蒸发器形式	吊顶风机	蛇形钢排管	2翅铝排管		
9	冷凝器形式	风冷冷凝	水冷冷凝	蒸发冷冷凝		
10	涡旋 (活塞) 并联机组回油	高压回油		低压回油		
11	螺杆机油冷却方式	风冷式	水冷式	虹吸式		
12	螺杆机经济器	带经济器		不带经济器		
13	制冷剂类型	R134a	R22	R407C	R404A	R507A
14	系统制冷剂充注量(kg)					
15	设备运行地点 (省/市)					
其他描述:						

我们提供的选型方案仅供参考。

用心智造，用心服务

BUILD WITH MIND, SERVE WITH HEART.

O&F
欧达·法斯克

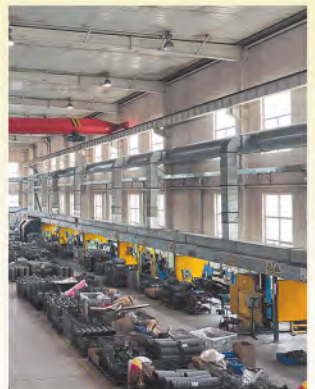

OU DAFASIKE

欧达法斯克能源科技

尽我们所能 满足您所需

with the best of our ability to provide what you need



天津市欧达法斯克制冷设备有限公司

地址：天津市津南区双港镇慧科路8号
邮政编码：300350
联系电话：+86-22-28571143 28571145 8571146
传真电话：+86-22-28571149
网址：www.oudafasike.com
邮箱：oudafasike@oudafasike.com

Tianjin OUDAFASIKE Refrigeration Equipment Co., Ltd

Address: No.8 Huike Road Shuanggang Town, Jinnan District, Tianjin, China
P.S.: 300350
TEL: +86-22-28571143 28571145 28571146
FAX: +86-22-28571149
Http: www.oudafasike.com
E-mail: oudafasike@oudafasike.com



河北欧达法斯克能源科技有限公司

地址：河北省沧州市青县经济开发区南区北环东南侧发展大街东侧
邮政编码：062650
联系电话：+86-13383370992 +86-17338278811 (微信同号)
http://www.oudafasike.com
邮箱：oudafasike@oudafasike.com

Hebei OUDAFASIKE Energy Technology Co., Ltd.

Address: East Side of Fazhan Street, South Side of Beihuan East Road, South Area, Economic Development Zone, Qingxian County, Cangzhou City, Hebei Province
Postal Code: 062650
TEL: +86-13383370992 +86-17338278811 (Same number for WeChat)
http://www.oudafasike.com
Email: oudafasike@oudafasike.com

